



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Bus system connector - SACC-M12MRB-2SC SH PB - 1539208

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Bus system connector, 2-position, shielded, Plug angled M12, B-coded, Spring-cage connection, knurl material: Metal, external cable diameter 4 mm ... 8 mm



RoHS

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 STK                                                                                                   |
| GTIN         | <br>4 046356 084239 |
| GTIN         | 4046356084239                                                                                           |

### Technical data

#### Dimensions

|                                         |               |
|-----------------------------------------|---------------|
| External cable diameter                 | 4 mm ... 8 mm |
| Stripping length of the sheath          | 35 mm         |
| Stripping length of the individual wire | 10 mm         |

#### Ambient conditions

|                      |      |
|----------------------|------|
| Degree of protection | IP67 |
|----------------------|------|

#### General

|                       |                               |
|-----------------------|-------------------------------|
| Rated current at 40°C | 4 A                           |
| Rated voltage         | 60 V DC                       |
|                       | 48 V AC                       |
| Number of positions   | 2                             |
| Insulation resistance | ≥ 100 MΩ                      |
| Coding                | B-coded                       |
| Standards/regulations | M12 connector IEC 61076-2-101 |
| Status display        | No                            |
| Overvoltage category  | II                            |
| Degree of pollution   | 3                             |
| Connection method     | Spring-cage connection        |

## Bus system connector - SACC-M12MRB-2SC SH PB - 1539208

### Technical data

#### General

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| Conductor cross section     | 0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>                        |
| Conductor cross section AWG | 26 ... 20                                                           |
| Insertion/withdrawal cycles | ≥ 100                                                               |
| Torque                      | 0.4 Nm (M12 knurl)                                                  |
|                             | 0.8 Nm (Connector with coupling sleeve)                             |
|                             | 3 Nm (Pressure nut)                                                 |
| Assembly instructions       | The connector pin assignment can be rotated 45° to the cable outlet |
|                             | The wires can be connected both with ferrules and without ferrules  |

#### Material

|                                        |                              |
|----------------------------------------|------------------------------|
| Flammability rating according to UL 94 | V0                           |
| Contact material                       | CuSn                         |
| Contact surface material               | Ni/Au                        |
| Contact carrier material               | PA 6.6                       |
| Material of grip body                  | Zinc die-cast, nickel-plated |
| Material, knurls                       | Metal                        |
| Sealing material                       | NBR                          |

#### Cable

|                          |                               |
|--------------------------|-------------------------------|
| Standards/specifications | M12 connector IEC 61076-2-101 |
|--------------------------|-------------------------------|


#### Standards and Regulations

|                                        |                 |
|----------------------------------------|-----------------|
| Standard designation                   | M12 connector   |
| Standards/regulations                  | IEC 61076-2-101 |
| Connection in acc. with standard       | CUL             |
| Flammability rating according to UL 94 | V0              |

### Drawings


## Bus system connector - SACC-M12MRB-2SC SH PB - 1539208

Schematic diagram




Pin assignment M12 male connector, 5-pos., B-coded, male side

Functional drawing

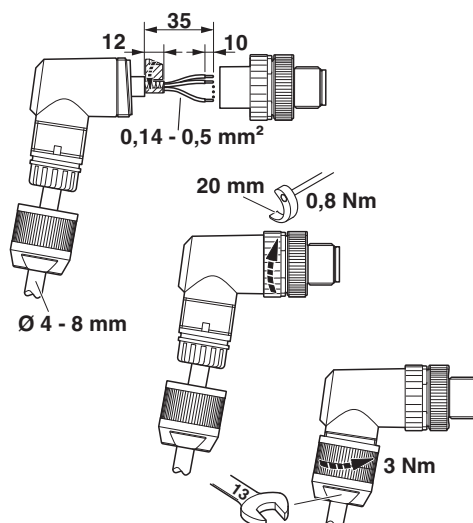

Slide the pressure nut and sleeve housing along the cable, strip the cable, shorten the shield, strip the single wires, connect the wires, in the case of a straight sleeve housing gently twist the wires together, stick the shielding foil around the shortened shield, in the case of a cable outside diameter < 6 mm stick an additional shielding foil around the wire pack, screw the sleeve housing to the plug insert, screw the pressure nut tight.

Dimensional drawing



M12 x 1 male plug, angled, shielded

### Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

## Bus system connector - SACC-M12MRB-2SC SH PB - 1539208

### Approvals

#### Approval details

|                    |  |                                                                                   |                                                                                                                                                       |               |       |  |
|--------------------|--|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|--|
| UL Recognized      |  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |       |  |
|                    |  |                                                                                   |                                                                                                                                                       |               |       |  |
| Nominal current IN |  |                                                                                   |                                                                                                                                                       |               | 4 A   |  |
| Nominal voltage UN |  |                                                                                   |                                                                                                                                                       |               | 300 V |  |

|                    |  |                                                                                   |                                                                                                                                                       |               |       |
|--------------------|--|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|
| cUL Recognized     |  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |       |
|                    |  |                                                                                   |                                                                                                                                                       |               |       |
| Nominal current IN |  |                                                                                   |                                                                                                                                                       |               | 4 A   |
| Nominal voltage UN |  |                                                                                   |                                                                                                                                                       |               | 300 V |

|                  |                                                                                     |                                                                                                                                                       |
|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| cULus Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> |
|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>