



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC FT DIST 0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E2	REVISED PER ECO-11-005027	11MAR11	RK	HMR

NOTES:

PHYSICAL PROPERTIES:

HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:

TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:

PITCH: 11.0mm(.433)
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB


ELECTRICAL PROPERTIES:

MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:

OPERATING TEMP: -40°C TO 120°C

1 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

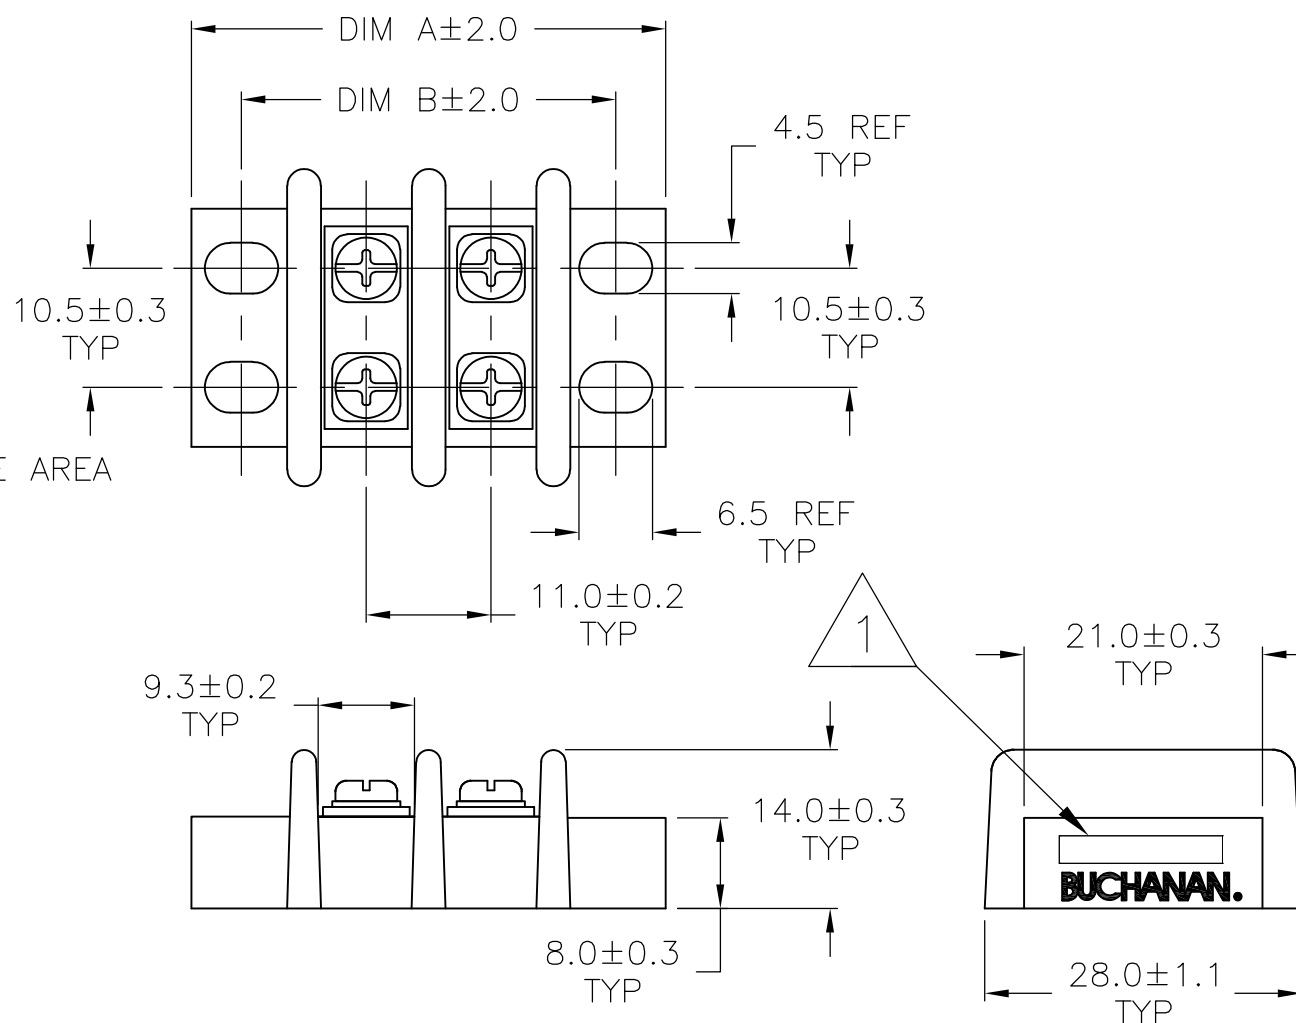

296.1	304.9	26	2-1546477-6
285.1	293.9	25	2-1546477-5
274.1	282.9	24	2-1546477-4
263.1	271.9	23	2-1546477-3
252.1	260.9	22	2-1546477-2
241.1	249.9	21	2-1546477-1
230.1	238.9	20	2-1546477-0
219.1	227.9	19	1-1546477-9
208.1	216.9	18	1-1546477-8
197.1	205.9	17	1-1546477-7
186.1	194.9	16	1-1546477-6
175.1	183.9	15	1-1546477-5
164.1	172.9	14	1-1546477-4
153.1	161.9	13	1-1546477-3
142.1	150.9	12	1-1546477-2
131.1	139.9	11	1-1546477-1
120.1	128.9	10	1-1546477-0
109.1	117.9	09	1546477-9
98.1	106.9	08	1546477-8
87.1	95.9	07	1546477-7
76.1	84.9	06	1546477-6
65.1	73.9	05	1546477-5
54.1	62.9	04	1546477-4
43.1	51.9	03	1546477-3
32.1	40.9	02	1546477-2
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL 22JAN03	STE TE Connectivity	
DIMENSIONS: mm		CHK C RICHARD 1/22/03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 1/22/03	NAME	
0 PLC ± -		PRODUCT SPEC	DOUBLE ROW BARRIER STRIP W/ WASHER 11.0mm(.433) SPACING	
1 PLC ± 0.3		APPLICATION SPEC	-	
2 PLC ± 0.25		WEIGHT -	SIZE A3	CAGE CODE 00779
3 PLC ± -		CUSTOMER DRAWING	DRAWING NO	RESTRICTED TO
4 PLC ± -			C-1546477	-
ANGLES ± 2'		SCALE 1:1	SHEET 1 OF 1	REV E2
FINISH -				