



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Änderungsstand / Revision level		Beschreibung der Änderung/ Revision Record	Geändert Changed	Datum Date	Geprüft Approved	Datum Date
Solid / part	Zeichnung / drawing					
0	1	Mass 6.5±0,2 war 5.5±0,2 und 0.7 war 1.5.	Mueller	14.03.03	Schiwek	14.03.03
0	2	Blechdicke 1.5 war 0.7.	Schiwek	07.07.03	bma	07.07.03

Loch Ø / Hole size

6.5±0,2 mm

①

Blechdicke / Panel thickness

1.5 bis 3,0 mm

mit Dichtung/with seal

① ②

Werkstoff / Material

FA 6.6 schlagzäh mod.,
hitzebeständig/
PA 6.6 impact resistend
mod., heatstabilized
schwarz/black

Toleranzen / Tolerances



Masse ohne Toleranzangaben nach
Dimensionen without tolerances
details to

DIN 16901 /


AUSFÜHRUNG / PERFORMANCE

SPEZIFIKATION / SPEC.


Zellgummidichtung TE4-560-000
Materialdicke 3
Temperaturbereich -30°C bis 110°C /
Cellular rubber seal TE4-560-000
Material thickness 3
Temperature range -30°C until 110°C

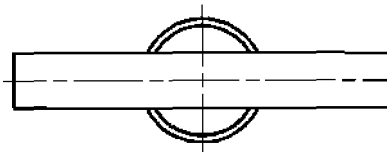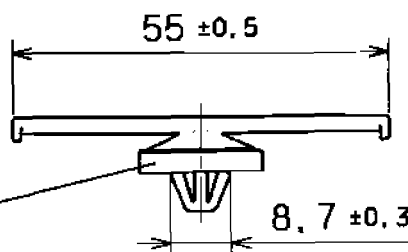

Nur zur Information,
wird vom Änderungsdienst
nicht erfasst.
For information only,
not subject to alteration service.

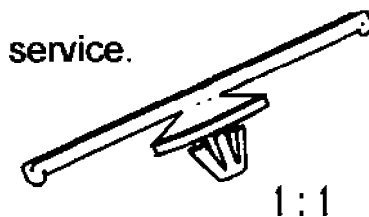

CATIA
A.2.4



Gez. / Drawn

29.10.01

Mueller

Gepr. / Appr.

29.10.01

Spiesz

Masstab / Scale 1:1

NT 116/01

Benennung / Title

Anwickelteil mit Dichtung
Winding part with seal
SFT6.5-D16-3

Zeichnungs-Nr./Drawing-No

14. 1549

D. Size A4

IRIatt

Verzögerung sowie Vervielfältigung dieser
Unterlage, Vervielfältigung und Mitteilung ihres
Inhalts nicht gestattet, soweit nicht aus-
drücklich zugestanden. Zuförderungen
verpflichten zu Schadenersatz. Alle Rechte
für den Fall der Patenterteilung oder
Gebrauchsmuster-Eintragung vorbehalten.

The copyright of this drawing is reserved
by HELLERMANN TYTON GmbH. It is issued
on condition that it is not reproduced,
wholly or in part, to a third party, either
HELLERMANN TYTON GmbH, the consent of

HellermannTyton
HellermannTyton GmbH

Grosser Moorweg 45, 25436 Tarnesch
Telefon: 04122 / 701-1

Telefax: 04122 , 701-400

received

ENTERED

XCL-HMAN025CST

Product Number
Cross Reference Record

Uncontrolled Document

Pre-UNS Number System	(New) UNS Universal Number System	Customer Part Number
Product Number SFT6.5-D16-3	Product Number 155-11601	Product Number -
Reference Drawing Number: XCL-HMAN025CST(14.1549)		

Issued By:	(New) UNS Product Number	Issue Date:
HellermannTyton	Universal Numbering System	April 20, 2011