Chipsmall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Part Number: **1552200052**

Status: **Active**

Overview: Flamar Standard and Custom Cables for Industrial Automation

Description: Flamar Sensor Cable, WSOR Jacket, Unshielded, 3 Circuits, 0.34mm² / 22 AWG, 4.80mm (.189") Diameter, 600.0m (1968.50') Length, Black

Documents:
Product Specification 1552200001-P1E (PDF)   Product Literature (PDF)
RoHS Certificate of Compliance (PDF)

Series image - Reference only

Agency Certification
UL	E172949

General
Product Family	Cable
Series	155220
Comments	3 reels of 200.0m each
Crimp Quality Equipment	Yes
Geographic Area	Global
Overview	Flamar Standard and Custom Cables for Industrial Automation
Product Literature Order No	987651-3992
Product Name	Flamar, Signal and Control
UPC	889056457668

Physical
Bending Radius - Minimum	> 7.5xOD
Cable Length	600.0m
Circuits (Loaded)	3
Color - Cable Jacket	Black
Insulation	TPE
Material - Outer Jacket	WSOR
Net Weight	0.030/kg
Outer Jacket Diameter	4.80mm
Packaging Type	Reel
Temperature Range - Operating	-25° to +80°C
Wire Size AWG	22
Wire Size mm²	0.34
Wire/Cable Type	UL AWM 21215 / CSA

Electrical
Current - Maximum per Contact	Contact Molex
Voltage - Maximum	600V

Material Info
Engineering Number	B30-3-3X200M

Reference - Drawing Numbers
Product Specification	1552200001-P1E
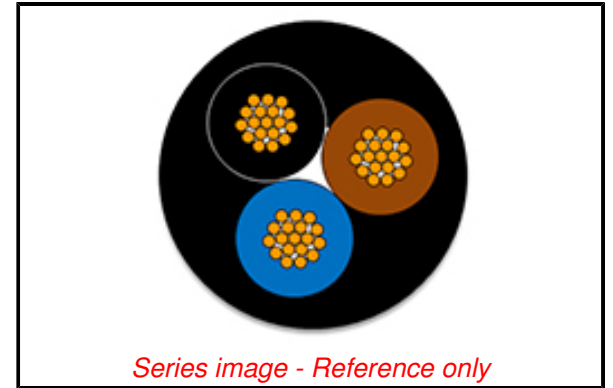
EU ELV
Not Reviewed

EU RoHS   **China RoHS**
Not Reviewed

REACH SVHC
Not Reviewed

Halogen-Free Status
Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series
155220 Series

Use With
Nano-Change (M8) 120091 , Micro-Change (M12) 120071 , Ultra-Lock (M12) 120085