



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



XMPL



Aluminum Polymer Capacitors

SMD Solid Conductive (multilayer-type)


FEATURES

Small Size – Low Impedance – Halogen Free Epoxy – RoHS Compliant – Stable with Temperature, Applied Voltage and Frequency

APPLICATIONS

Decoupling – Noise Suppression

Operating Temperature Range		-40°C to +105°C							
Capacitance Tolerance		±20% (M), -35% +10% (Y) 120 Hz, 20°C							
Surge Voltage	WVDC	2	2.5	4	6.3	10	12.5	16	
	SVDC	1.25*WVDC							
Dissipation Factor	WVDC	2	2.5	4	6.3	10	12.5	16	
	Tan δ	.06							
Leakage Current (25°C) MAX		Time	≤10 VDC			≥12.5 VDC			
		2 Minutes	0.04CV			0.1CV			
Load Life		1000 hours at 105°C with rated WVDC applied							
		Capacitance Change	≤10% of initial measured value						
		Dissipation Factor	≤100% of maximum specified value						
		Leakage Current	≤100% of maximum specified value						
Moisture Resistance Test		500 hours at 60°C and 90% relative Humidity with no voltage applied							
		Capacitance Change	≤20% to +70% of initially measured value						
		Dissipation Factor	≤200% of maximum specified value						
		Leakage Current	≤100% of maximum specified value						
Moisture Sensitivity Level (MSL)		3							

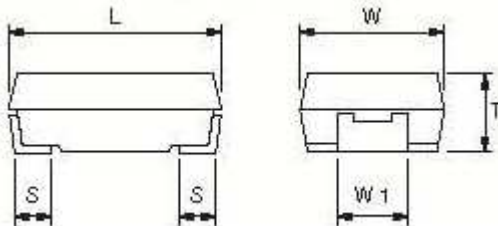

Case size	EIA Code	L±0.2	W±0.2	T±0.2	W1±0.1	S±0.3
G19	7343	7.3	4.3	1.9	2.4	1.3
G28	7343	7.3	4.3	2.8	2.4	1.3

ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

© 2017 Illinois Capacitor

North America
Tel: 847.675.1760
sales@illcap.com

Asia
Tel: 852.2793 0931
sales@illcap.com.hk


XMPL

Aluminum Polymer Capacitors

SMD Solid Conductive (multilayer-type)




Markings

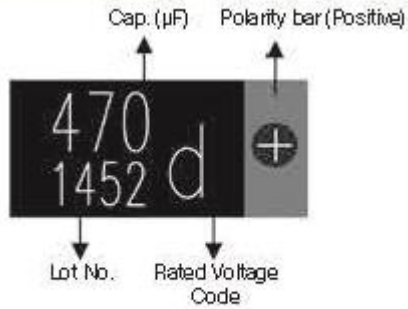

Example: 470 μ F/2V

Recommended soldering profile

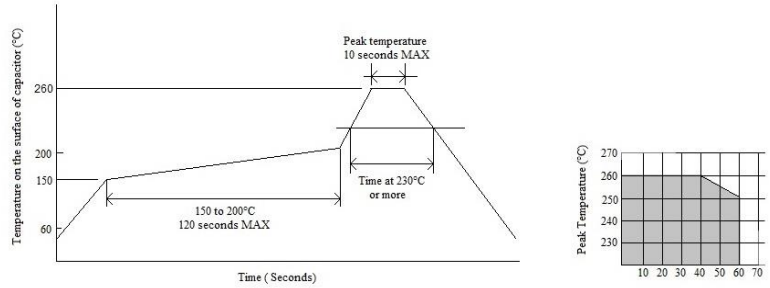

IC ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

© 2017 Illinois Capacitor

North America
Tel: 847.675.1760
sales@illcap.com

Asia
Tel: 852.2793 0931
sales@illcap.com.hk

XMPL

+105°C Multi-layer Low Profile Chip

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (mΩ) 100 kHz, +20°C	Leakage Current (µA)	Maximum RMS Ripple Current (A) 100 kHz, +105°C	Dimensions LxHxT (mm)
6.8	16	685XMPL016MG19	14.6282	70	32.64	2	7.3x4.3x1.9
10	6.3	106XMPL6R3MG19	9.9472	40	6.3	1	7.3x4.3x1.9
10	10	106XMPL010MG19	9.9472	45	30	1	7.3x4.3x1.9
10	12	106XMPL012MG19	9.9472	55	37.5	1	7.3x4.3x1.9
10	16	106XMPL016MG19	9.9472	40	48	2	7.3x4.3x1.9
15	12	156XMPL012MG19	6.6315	45	56.25	1	7.3x4.3x1.9
15	16	156XMPL016MG19	6.6315	40	72	3	7.3x4.3x1.9
22	6.3	226XMPL6R3MG19	4.5214	35	13.86	1	7.3x4.3x1.9
22	10	226XMPL010MG19	4.5214	40	66	1.8	7.3x4.3x1.9
22	12	226XMPL012MG19	4.5214	30	82.5	1.8	7.3x4.3x1.9
22	16	226XMPL016MG19	4.5214	40	105.6	3	7.3x4.3x1.9
22	16	226XMPL016MG28	4.5214	40	105.6	3	7.3x4.3x2.8
33	6.3	336XMPL6R3MG19	3.0143	25	20.79	1.8	7.3x4.3x1.9
33	10	336XMPL010MG19	3.0143	40	99	2	7.3x4.3x1.9
33	12	336XMPL012MG28	3.0143	25	123.75	2	7.3x4.3x2.8
47	6.3	476XMPL6R3MG19	2.1164	25	29.61	1.8	7.3x4.3x1.9
47	10	476XMPL010MG19	2.1164	40	141	3	7.3x4.3x1.9
47	12	476XMPL012MG28	2.1164	20	176.25	2	7.3x4.3x2.8
68	4	686XMPL004MG19	1.4628	20	27.2	1.9	7.3x4.3x1.9
68	6.3	686XMPL6R3MG19	1.4628	15	42.84	2	7.3x4.3x1.9
68	10	686XMPL010MG28	1.4628	40	204	3	7.3x4.3x2.8
82	4	826XMPL004MG19	1.2131	9	32.8	3	7.3x4.3x1.9
100	2	107XMPL002MG19	0.9947	16	20	2	7.3x4.3x1.9
100	4	107XMPL004MG19	0.9947	9	40	3	7.3x4.3x1.9
100	6.3	107XMPL6R3MG19	0.9947	15	63	2.7	7.3x4.3x1.9
100	6.3	107XMPL6R3MG19H	0.9947	12	63	2.7	7.3x4.3x1.9
120	6.3	127XMPL6R3MG19X	0.8289	9	75.6	2.7	7.3x4.3x1.9
120	6.3	127XMPL6R3MG19	0.8289	15	75.6	2.7	7.3x4.3x1.9
120	6.3	127XMPL6R3MG19H	0.8289	12	75.6	2.7	7.3x4.3x1.9
150	2	157XMPL002MG19	0.6631	9	30	3	7.3x4.3x1.9
150	2.5	157XMPL2R5MG28	0.6631	9	37.5	3	7.3x4.3x2.8
150	2.5	157XMPL2R5MG19	0.6631	9	37.5	3	7.3x4.3x1.9
150	4	157XMPL004MG19	0.6631	12	60	3	7.3x4.3x1.9
150	4	157XMPL004MG19R	0.6631	7	60	3	7.3x4.3x1.9
150	4	157XMPL004MG19X	0.6631	9	60	3	7.3x4.3x1.9
150	6.3	157XMPL6R3MG28	0.6631	15	94.5	3	7.3x4.3x2.8
150	6.3	157XMPL6R3MG28H	0.6631	12	94.5	3	7.3x4.3x2.8
150	6.3	157XMPL6R3MG19	0.6631	15	94.5	3	7.3x4.3x1.9
150	6.3	157XMPL6R3MG19H	0.6631	12	94.5	3	7.3x4.3x1.9
150	6.3	157XMPL6R3MG19X	0.6631	9	94.5	3	7.3x4.3x1.9
150	6.3	157XMPL6R3MG28X	0.6631	9	94.5	3	7.3x4.3x2.8
180	2	187XMPL002MG19	0.5526	9	36	2.7	7.3x4.3x1.9
180	2.5	187XMPL2R5MG19	0.5526	9	45	3	7.3x4.3x1.9
180	2.5	187XMPL2R5MG28	0.5526	9	45	3	7.3x4.3x2.8
180	4	187XMPL004MG28R	0.5526	7	72	3	7.3x4.3x2.8
180	4	187XMPL004MG28X	0.5526	9	72	3	7.3x4.3x2.8
180	4	187XMPL004MG19H	0.5526	12	72	3	7.3x4.3x1.9
180	4	187XMPL004MG19R	0.5526	7	72	3	7.3x4.3x1.9
180	4	187XMPL004MG19X	0.5526	9	72	3	7.3x4.3x1.9
180	4	187XMPL004MG28H	0.5526	12	72	3	7.3x4.3x2.8
180	6.3	187XMPL6R3MG19	0.5526	15	113.4	2.7	7.3x4.3x1.9
220	2	227XMPL002MG19	0.4521	15	44	3	7.3x4.3x1.9
220	2.5	227XMPL2R5MG19H	0.4521	12	55	3	7.3x4.3x1.9
220	2.5	227XMPL2R5MG19R	0.4521	7	55	3	7.3x4.3x1.9
220	2.5	227XMPL2R5MG19X	0.4521	9	55	3	7.3x4.3x1.9
220	2.5	227XMPL2R5MG28H	0.4521	12	55	3	7.3x4.3x2.8
220	2.5	227XMPL2R5MG28R	0.4521	7	55	3	7.3x4.3x2.8
220	2.5	227XMPL2R5MG28X	0.4521	9	55	3	7.3x4.3x2.8

XMPL

+105°C Multi-layer Low Profile Chip

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (mΩ) 100 kHz, +20°C	Leakage Current (µA)	Maximum RMS Ripple Current (A) 100 kHz, +105°C	Dimensions LxHxT (mm)
220	4	227XMPL004MG28R	0.4521	7	88	3	7.3x4.3x2.8
220	4	227XMPL004MG28X	0.4521	9	88	3	7.3x4.3x2.8
220	4	227XMPL004MG19H	0.4521	12	88	3	7.3x4.3x1.9
220	4	227XMPL004MG19R	0.4521	7	88	3	7.3x4.3x1.9
220	4	227XMPL004MG19X	0.4521	9	88	3	7.3x4.3x1.9
220	4	227XMPL004MG28H	0.4521	12	88	3	7.3x4.3x2.8
220	6.3	227XMPL6R3MG19	0.4521	10	138.6	3	7.3x4.3x1.9
220	6.3	227XMPL6R3MG28	0.4521	15	138.6	3	7.3x4.3x2.8
270	2	277XMPL002MG19H	0.3684	12	54	3	7.3x4.3x1.9
270	2	277XMPL002MG19R	0.3684	6	54	3	7.3x4.3x1.9
270	2	277XMPL002MG19X	0.3684	9	54	3	7.3x4.3x1.9
270	2.5	277XMPL2R5MG28R	0.3684	7	67.5	3	7.3x4.3x2.8
270	2.5	277XMPL2R5MG28X	0.3684	9	67.5	3	7.3x4.3x2.8
270	2.5	277XMPL2R5MG19X	0.3684	9	67.5	3	7.3x4.3x1.9
270	2.5	277XMPL2R5MG28H	0.3684	12	67.5	3	7.3x4.3x2.8
270	2.5	277XMPL2R5MG19H	0.3684	12	67.5	3	7.3x4.3x1.9
270	2.5	277XMPL2R5MG19R	0.3684	7	67.5	3	7.3x4.3x1.9
270	4	277XMPL004MG19R	0.3684	7	108	2.7	7.3x4.3x1.9
270	4	277XMPL004MG19X	0.3684	9	108	2.7	7.3x4.3x1.9
270	4	277XMPL004MG19H	0.3684	12	108	2.7	7.3x4.3x1.9
330	2	337XMPL002MG28H	0.3014	12	66	3	7.3x4.3x2.8
330	2	337XMPL002MG28A	0.3014	4.5	66	3	7.3x4.3x2.8
330	2	337XMPL002MG19A	0.3014	4.5	66	3	7.3x4.3x1.9
330	2	337XMPL002MG19R	0.3014	6	66	3	7.3x4.3x1.9
330	2	337XMPL002MG19H	0.3014	12	66	3	7.3x4.3x1.9
330	2	337XMPL002MG28R	0.3014	6	66	3	7.3x4.3x2.8
330	2	337XMPL002MG28X	0.3014	9	66	3	7.3x4.3x2.8
330	2	337XMPL002MG19X	0.3014	9	66	3	7.3x4.3x1.9
330	2.5	337XMPL2R5MG19A	0.3014	4.5	82.5	3	7.3x4.3x1.9
330	2.5	337XMPL2R5MG19R	0.3014	6	82.5	3	7.3x4.3x1.9
330	2.5	337XMPL2R5MG19X	0.3014	9	82.5	3	7.3x4.3x1.9
330	2.5	337XMPL2R5MG19H	0.3014	12	82.5	3	7.3x4.3x1.9
330	4	337XMPL004YG19X	0.3014	9	132	2.7	7.3x4.3x1.9
330	4	337XMPL004YG19R	0.3014	7	132	2.7	7.3x4.3x1.9
330	4	337XMPL004YG19H	0.3014	12	132	2.7	7.3x4.3x1.9
330	6.3	337XMPL6R3YG19	0.3014	10	207.9	3	7.3x4.3x1.9
330	6.3	337XMPL6R3YG28	0.3014	10	207.9	3	7.3x4.3x2.8
390	2	397XMPL002MG19X	0.2551	9	78	3	7.3x4.3x1.9
390	2	397XMPL002MG19R	0.2551	6	78	3	7.3x4.3x1.9
390	2	397XMPL002MG19A	0.2551	4.5	78	3	7.3x4.3x1.9
390	2.5	397XMPL2R5MG19R	0.2551	6	97.5	3	7.3x4.3x1.9
390	2.5	397XMPL2R5MG19X	0.2551	9	97.5	3	7.3x4.3x1.9
390	2.5	397XMPL2R5MG19H	0.2551	12	97.5	3	7.3x4.3x1.9
390	2.5	397XMPL2R5MG19A	0.2551	4.5	97.5	3	7.3x4.3x1.9
470	2	477XMPL002MG19X	0.2116	9	94	3	7.3x4.3x1.9
470	2	477XMPL002MG28A	0.2116	4.5	94	3	7.3x4.3x2.8
470	2	477XMPL002MG28X	0.2116	9	94	3	7.3x4.3x2.8
470	2	477XMPL002MG28R	0.2116	6	94	3	7.3x4.3x2.8
470	2	477XMPL002MG19A	0.2116	4.5	94	3	7.3x4.3x1.9
470	2	477XMPL002MG19R	0.2116	6	94	3	7.3x4.3x1.9
470	2.5	477XMPL2R5YG19R	0.2116	6	117.5	3	7.3x4.3x1.9
470	2.5	477XMPL2R5YG28A	0.2116	4.5	117.5	3	7.3x4.3x2.8
470	2.5	477XMPL2R5YG19X	0.2116	9	117.5	3	7.3x4.3x1.9
470	2.5	477XMPL2R5YG28H	0.2116	12	117.5	3	7.3x4.3x2.8
470	2.5	477XMPL2R5YG28R	0.2116	6	117.5	3	7.3x4.3x2.8
470	2.5	477XMPL2R5YG28X	0.2116	9	117.5	3	7.3x4.3x2.8
470	2.5	477XMPL2R5YG19A	0.2116	4.5	117.5	3	7.3x4.3x1.9
470	2.5	477XMPL2R5YG19H	0.2116	12	117.5	3	7.3x4.3x1.9