



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Contact carriers - VC-AMC 4 - 1583877

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Contact carrier for male crimp contacts, 3+PE-pos., 690 V/70 A, for snapping into mounting panel



Product Features

- ✓ Simply snap into the VC-AR... panel cutout and you're done!
- ✓ No need for panel mounting flange
- ✓ No need for panel mounting frame
- ✓ Crimp contacts are released using a flat-bladed screwdriver



Key commercial data

Packing unit	1 PCE
Minimum order quantity	5 PCE
Weight per Piece (excluding packing)	22.0 GRM
Custom tariff number	85472000
Country of origin	Germany

Technical data

General

Note	Connectors may only be connected/disconnected when under no load.
Connection method	Crimp connection
	Crimp connection
Pollution degree	3
Surge voltage category	III
Number of positions	3+PE
Insertion/withdrawal cycles	≥ 50
Design	VC2
Conductor cross section AWG/kcmil min.	12
Conductor cross section AWG/kcmil max	6

Contact carriers - VC-AMC 4 - 1583877

Technical data

General

Connection in acc. with standard	IEC / EN
Conductor cross section	4 mm ² ... 16 mm ²

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
---------------------------------	-------------------

Material data

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	hard-silver plated
Contact carrier material	PA

Electrical characteristics

Rated voltage (III/3)	690 V
Rated surge voltage	6 kV
Rated current	70 A
	60 A

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Contact carriers - VC-AMC 4 - 1583877

Approvals

Approvals


Approvals


UL Recognized / cUL Recognized / GOST / cULus Recognized


Ex Approvals

Approvals submitted

Approval details

UL Recognized 	
mm ² /AWG/kcmil	8
Nominal current I _N	50 A
Nominal voltage U _N	600 V

cUL Recognized 	
mm ² /AWG/kcmil	8
Nominal current I _N	50 A
Nominal voltage U _N	600 V

GOST 	
--	--

cULus Recognized 	
--	--

Contact carriers - VC-AMC 4 - 1583877

Accessories

Accessories

Coding element

Coding profile - CP-HCC 4 - 1600027



Coding profile, Number of positions: 1, Color: red

Crimp contact

Crimp contact - IPCC 16-16-MT - 1733367



Single crimp pin contact for stranded conductors with 16 mm² cross section. Can only be crimped by machine, not with manual crimping pliers.

Crimp contact - IPCC 16-10-MT - 1733372



Single crimp pin contact for flexible cable with 6 and 10 mm² cross section.

Crimp contact - IPCC 16- 4-MT - 1733385



Single crimp pin contact for flexible cable with 4 mm² cross section.

Crimping tool

Contact carriers - VC-AMC 4 - 1583877

Accessories

Crimping pliers - CRIMPFOX PCC 16 CS 4QMM - 1743427



Crimping pliers for PCC 16 contacts


Crimping pliers - CRIMPFOX PCC 16 CS 10QMM - 1743430



Crimping pliers for PCC 16 contacts

Drawings

Diagram

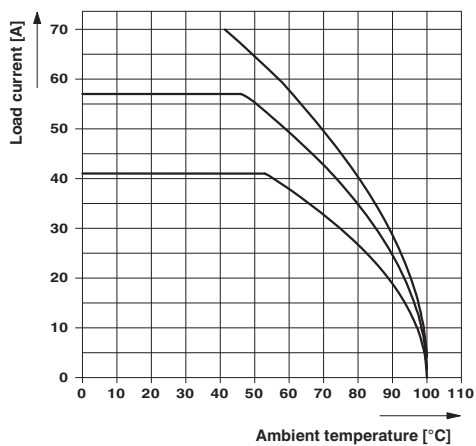

Dimensioned drawing

