



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-M-08-GBIT-MOD-ST

Order No.: 1587690

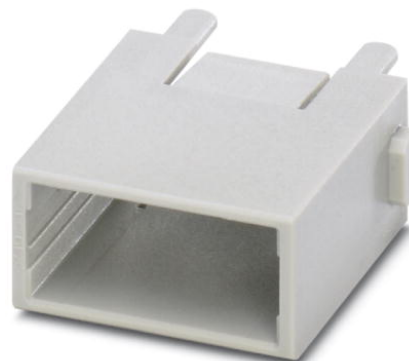

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1587690>

Plug module for Gigabit connectors

Commercial data

| | |
|--------------------------|--------------------|
| GTIN (EAN) | 4 046356 528276 |
| sales group | D042 |
| Pack | 1 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 546 (PC-2011) |

Product notes

WEEE/RoHS-compliant since:
09/09/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C ... 85 °C (including heating up of contacts) |
| Number of positions | 8 |

Mechanical characteristics

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 500 |
|-----------------------------|-------|

General characteristics


| | |
|------------------------------------|------------------------------|
| Series | HC-M-08-GBIT |
| Number of module slots | 1 |
| Inflammability class acc. to UL 94 | V0 |
| Assembly instructions | Module for Order No. 1587713 |

Material data

| | |
|--------------------------|----|
| Contact carrier material | PC |
|--------------------------|----|

Diagrams/Drawings

Dimensioned drawing

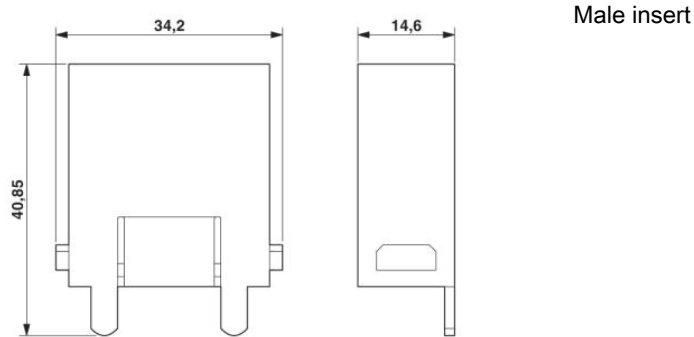

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;