



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Sleeve housing for cable plug-in connector - RC-00000001300 - 1592546


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sleeve housing for cable plug-in connector, straight, Screw locking, M23, Shielded: No, Cable cross section: 10 mm...14 mm



Key commercial data

| | |
|----------------------|--|
| Packing unit | 1 PCE |
| GTIN |  4 046356 191456 |
| Custom tariff number | 85389099 |
| Country of origin | GERMANY |

Technical data

Technical data

| | |
|---------------------------|---|
| Note | Order information Order contact inserts and cable clamping separately |
| Ambient temperature | -20 °C ... 125 °C |
| Type of locking | Screw locking |
| Degree of protection | IP65 |
| Contact connection method | Crimp connection |
| Type of contacts | Socket |
| Conductor entry | 10 mm ... 14 mm |

Material data

| | |
|----------------------------|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Gasket and O-ring material | FPM |

Specifications according to DIN EN 61984:2001

| | |
|--------------------------|--------|
| Installation height max. | 2000 m |
|--------------------------|--------|

Sleeve housing for cable plug-in connector - RC-00000001300 - 1592546

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC


| | |
|---------------|----------|
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 43201404 |
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |

eCl@ss


| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260708 |
| eCl@ss 7.0 | 27440312 |

Drawings

Diagram

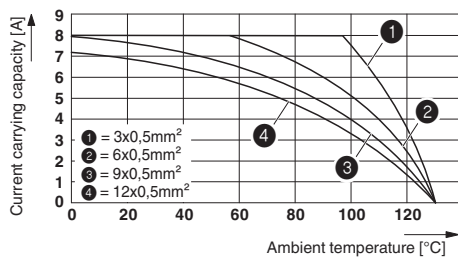

Diagram

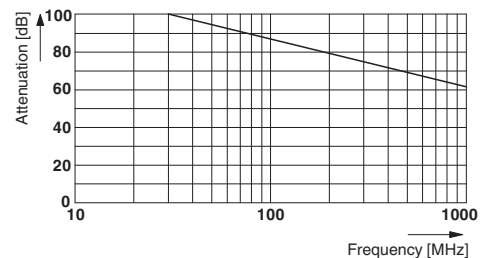

Dimensioned drawing

