



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Device connector, rear mounting - RC-0000000H000 - 1592833

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector, rear mounting, straight, Screw locking, M23, Axial O-ring, Central fastening M25 x 1.5, shielded: yes, panel thickness min.: 0.8 mm, panel thickness max.: 6.5 mm



Key Commercial Data

| | |
|------------------------|---------------|
| Packing unit | 24 STK |
| Minimum order quantity | 24 STK |
| GTIN | |
| GTIN | 4046356193016 |

Technical data

General

| | |
|-----------------------------|-----------------------------------------------------|
| Note | Order information: Order contact inserts separately |
| Type of locking | Screw locking |
| Pg housing screw connection | none |
| Mounting type | Central fastening M25 x 1.5 |

Ambient conditions

| | |
|----------------------|-------------------|
| Ambient temperature | -20 °C ... 125 °C |
| Degree of protection | IP67 |

Material

| | |
|----------------------------|----------------------------------------------------------------------|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Gasket and O-ring material | FPM |

Specifications according to DIN EN 61984:2001

| | |
|--------------------------|--------|
| Installation height max. | 2000 m |
|--------------------------|--------|

Environmental Product Compliance

| | |
|------------|------------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |

Device connector, rear mounting - RC-0000000H000 - 1592833


Technical data

Environmental Product Compliance


| | |
|--|-----------------------------------------------------------------------------------------------------|
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|-----------------------------------------------------------------------------------------------------|

Drawings


Diagram

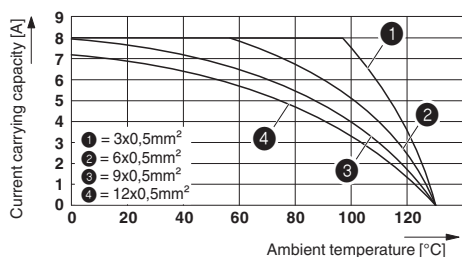


Diagram

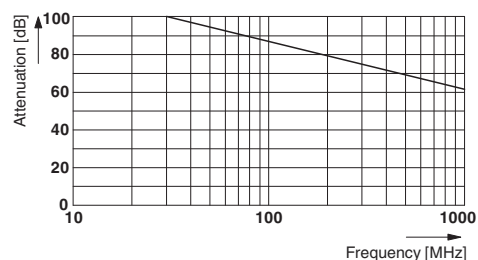

Dimensional drawing

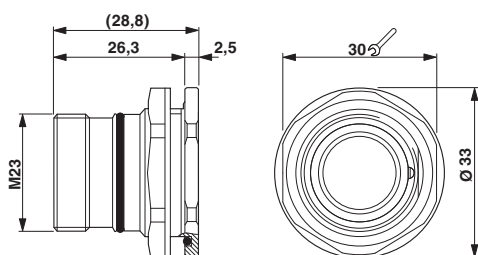

Dimensional drawing



Installation dimensions

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|--|---------|
| EAC | | B.01742 |
|-----|--|---------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>