



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Device connector, front mounting - RC-12P2N8A2200 - 1598203

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Device connector for front wall, straight, shielded: Yes, Screw locking, M23, Number of positions: 12, Type of contact: Male connector, Crimp connection, Flat gasket, 4xØ2,7, Flange dimensions: 25 mm x 25 mm, Panel thickness min.: 1 mm



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	26.04 GRM
Custom tariff number	74153300
Country of origin	Germany

### Technical data

Product type	Circular connectors (device side)
Number of positions	12
Coding	N
Type	Device connector for front wall
Mounting type	4xØ2,7
Rated current (IEC)	8
Rated voltage (IEC)	150
Thread	M23
Shielding	Yes
Signal type	Signal

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440103

## Device connector, front mounting - RC-12P2N8A2200 - 1598203

### Classifications

#### ETIM


ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC001121

#### UNSPSC


UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

### Drawings

Schematic diagram



Dimensioned drawing

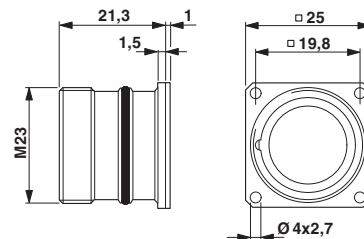

RC-00000002200  
Flat gasket