



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





15,000 Watt Transient Voltage Suppressor (TVS) Protection Device

**HALOGEN
FREE**

DESCRIPTION

This device clamps dangerous high-voltage short-term transients such as those produced by the secondary effects of lightning strikes, providing circuit protection to several class levels in the IEC61000-4-5 specification. Clamping time is virtually instantaneous. It also provides protection from transients caused by inductive load dumps, induced RFI, and ESD, providing protection to IEC61000-4-2 and -4-4.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Available in both unidirectional and bidirectional configurations.
- 5% working voltage tolerance.
- Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B.
- RoHS compliant (2002/95/EC), MSL level 1 (J-STD-020).

APPLICATIONS / BENEFITS

- Protection from transients caused by lightning strikes, switching transients, RFI, and ESD.
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4.
- Protection from the secondary effects of lightning per IEC61000-4-5.

MAXIMUM RATINGS @ 25 °C unless otherwise noted

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-55 to +175	°C
Thermal Resistance, Junction to Lead @ 3/8 inch (10 mm) lead length from body	$R_{\theta JL}$	8.0	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	77.5	°C/W
Non Repetitive Peak Forward Surge Current ⁽¹⁾	I_{FSM}	400	A
Rated Average Power Dissipation @ $T_L = 75$ °C, (0.375 inch (9.5 mm) from body) ⁽²⁾	$P_{M(AV)}$	8.0	W
Peak Pulse Power Dissipation with a 10/1000 μ s waveform (see Figure 1)	P_{PP}	15000	W
Peak Pulse Current with a 10/1000 μ s waveform ⁽³⁾	I_{PP}	See Electrical Table	A
Solder Temperature @ 10 s		260	°C

- Notes:**
1. For Unidirectional devices only. Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum. Also see [Figure 6](#).
 2. Mounted as shown in [Figure 5](#).
 3. Non-repetitive current pulse, per [Figure 3](#) and derated above $T_A = 25$ °C per [Figure 2](#).



P600 Package

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Epoxy body meets UL94V-0.
- TERMINALS: Matte-tin plating, fully RoHS compliant. Solderable per MIL-STD-750, method 2026.
- MARKING: Manufacturer ID, date code and part number.
- POLARITY: For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: Approximately 0.07 ounce (2.0 grams).
- See [Package Dimensions](#) on last page.

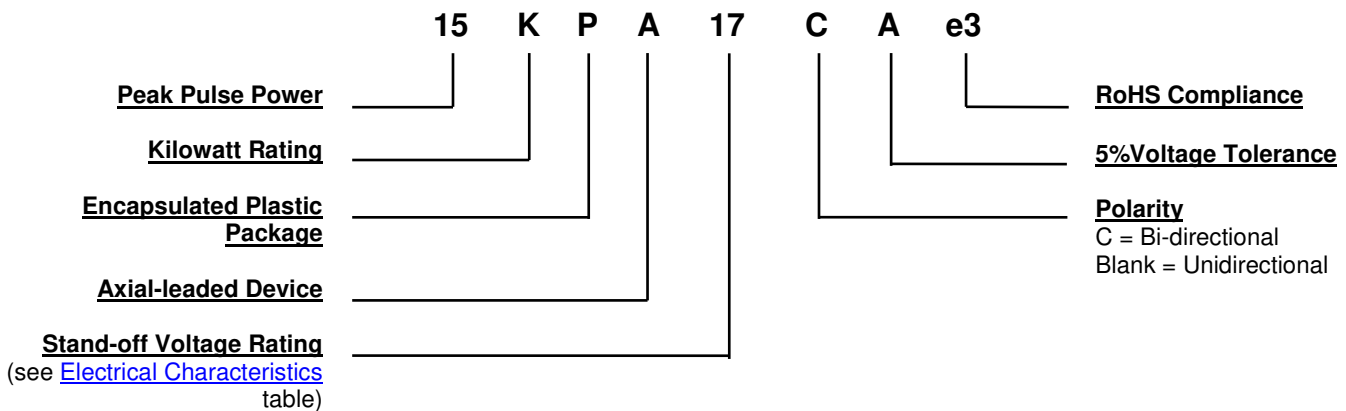PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by the change in temperature that caused it expressed in %/°C or mV/°C.
V_{WM}	Working Standoff Voltage: The maximum-rated value of dc or repetitive peak positive cathode-to-anode voltage that may be continuously applied over the standard operating temperature.
P_{PP}	Peak Pulse Power. The rated random recurring peak impulse power or rated nonrepetitive peak impulse power. The impulse power is the maximum-rated value of the product of I_{PP} and V_C .
$V_{(BR)}$	Breakdown Voltage: The voltage across the device at a specified current $I_{(BR)}$ in the breakdown region.
I_D	Standby Current: The current through the device at rated stand-off voltage.
I_{PP}	Peak Impulse Current: The maximum rated random recurring peak impulse current or nonrepetitive peak impulse current that may be applied to a device. A random recurring or nonrepetitive transient current is usually due to an external cause, and it is assumed that its effect will have completely disappeared before the next transient arrives.
V_C	Clamping Voltage: The voltage across the device in a region of low differential resistance during the application of an impulse current (I_{PP}) for a specified waveform.

ELECTRICAL CHARACTERISTICS @ 25 °C

DEVICE	BREAKDOWN VOLTAGE ⁽²⁾ , V _(BR) V _(BR) @ I _(BR) (Volts)		TEST CURRENT I _(BR) (mA)	STAND-OFF VOLTAGE V _{WM} (Volts)	MAXIMUM STANDBY CURRENT ⁽⁴⁾ I _D @ V _{WM} (µA)	MAXIMUM PEAK PULSE CURRENT ⁽³⁾ I _{PP} (A)	MAXIMUM CLAMPING VOLTAGE V _C @ I _{PP} (Volts)	MAXIMUM TEMPERATURE COEFFICIENT α _{V(BR)} (%/°C)
	Min	Max						
15KPA17Ae3 / 15KPA17CAe3	18.99	20.79	50	17	5000	515.4	29.3	0.1
15KPA18Ae3 / 15KPA18CAe3	20.11	22.01	50	18	5000	488.7	30.9	0.1
15KPA20Ae3 / 15KPA20CAe3	22.34	24.46	20	20	1500	440.2	34.3	0.1
15KPA22Ae3 / 15KPA22CAe3	24.57	26.91	10	22	500	407.0	37.1	0.1
15KPA24Ae3 / 15KPA24CAe3	26.81	29.35	5	24	150	371.0	40.7	0.1
15KPA26Ae3 / 15KPA26CAe3	29.04	31.80	5	26	50	343.2	44.0	0.1
15KPA28Ae3 / 15KPA28CAe3	31.28	34.24	5	28	25	317.9	47.5	0.1
15KPA30Ae3 / 15KPA30CAe3	33.51	36.70	5	30	15	297.8	50.7	0.1
15KPA33Ae3 / 15KPA33CAe3	36.90	40.40	5	33	2	276.1	54.7	0.1
15KPA36Ae3 / 15KPA36CAe3	40.20	44.00	5	36	2	252.5	59.8	0.1
15KPA40Ae3 / 15KPA40CAe3	44.70	48.90	5	40	2	229.5	65.8	0.1
15KPA43Ae3 / 15KPA43CAe3	48.00	52.60	5	43	2	216.3	69.8	0.1
15KPA45Ae3 / 15KPA45CAe3	50.30	55.00	5	45	2	207.4	72.8	0.1
15KPA48Ae3 / 15KPA48CAe3	53.60	58.70	5	48	2	194.3	77.7	0.1
15KPA51Ae3 / 15KPA51CAe3	57.00	62.40	5	51	2	182.1	82.9	0.1
15KPA54Ae3 / 15KPA54CAe3	60.30	66.00	5	54	2	172.2	87.7	0.1
15KPA58Ae3 / 15KPA58CAe3	64.80	70.90	5	58	2	161.0	93.8	0.1
15KPA60Ae3 / 15KPA60CAe3	67.00	73.40	5	60	2	155.0	97.4	0.1
15KPA64Ae3 / 15KPA64CAe3	71.50	78.30	5	64	2	144.9	104.2	0.1
15KPA70Ae3 / 15KPA70CAe3	78.20	85.60	5	70	2	132.9	113.6	0.1
15KPA75Ae3 / 15KPA75CAe3	83.80	91.70	5	75	2	123.8	122.0	0.1
15KPA78Ae3 / 15KPA78CAe3	87.10	95.40	5	78	2	119.7	126.1	0.1
15KPA85Ae3 / 15KPA85CAe3	94.90	104.00	5	85	2	109.7	137.6	0.1
15KPA90Ae3 / 15KPA90CAe3	100.50	110.10	5	90	2	103.7	145.6	0.1
15KPA100Ae3 / 15KPA100CAe3	111.70	122.30	5	100	2	93.6	161.3	0.1
15KPA110Ae3 / 15KPA110CAe3	122.90	134.50	5	110	2	84.5	178.6	0.1
15KPA120Ae3 / 15KPA120CAe3	134.00	146.80	5	120	2	78.5	192.3	0.1
15KPA130Ae3 / 15KPA130CAe3	145.20	159.00	5	130	2	72.5	208.3	0.1
15KPA150Ae3 / 15KPA150CAe3	167.60	183.50	5	150	2	62.4	241.9	0.1
15KPA160Ae3 / 15KPA160CAe3	178.70	195.70	5	160	2	58.4	258.6	0.1
15KPA170Ae3 / 15KPA170CAe3	189.90	207.90	5	170	2	55.4	272.7	0.1
15KPA180Ae3 / 15KPA180CAe3	201.10	220.10	5	180	2	52.3	288.5	0.1
15KPA200Ae3 / 15KPA200CAe3	223.40	244.60	5	200	2	47.3	319.1	0.1
15KPA220Ae3 / 15KPA220CAe3	245.70	269.10	5	220	2	35.2	356.0	0.1
15KPA240Ae3 / 15KPA240CAe3	268.10	293.50	5	240	2	39.3	384.6	0.1
15KPA260Ae3 / 15KPA260CAe3	290.40	318.00	5	260	2	36.2	416.7	0.1
15KPA280Ae3 / 15KPA280CAe3	312.80	342.40	5	280	2	33.2	454.5	0.1

NOTES:

- (1) All ratings at 25 °C unless specified otherwise.
- (2) V_(BR) measured after I_(BR) applied for 300 µs, I_(BR) = square wave pulse or equivalent.
- (3) Surge current waveform per [Figure 3](#) and derated per [Figure 2](#).
- (4) For bidirectional types with V_{WM} of 30 volts and less, the I_D limit is doubled.

GRAPHS

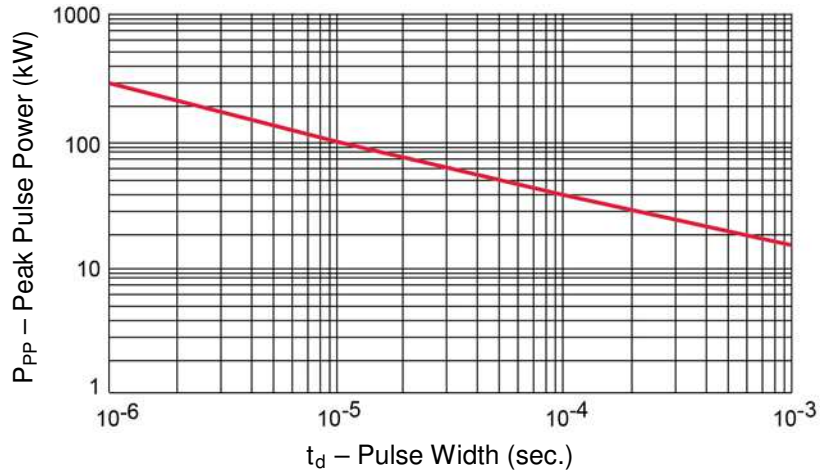


FIGURE 1
Peak Pulse Power Rating Curve

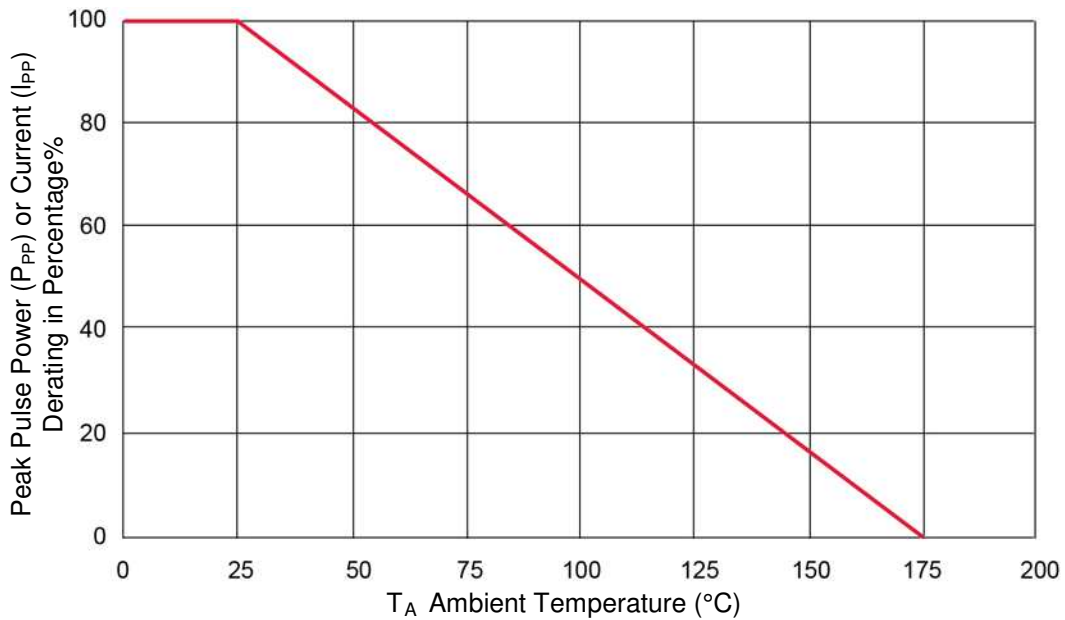


FIGURE 2
Pulse Derating Curve

GRAPHS (continued)

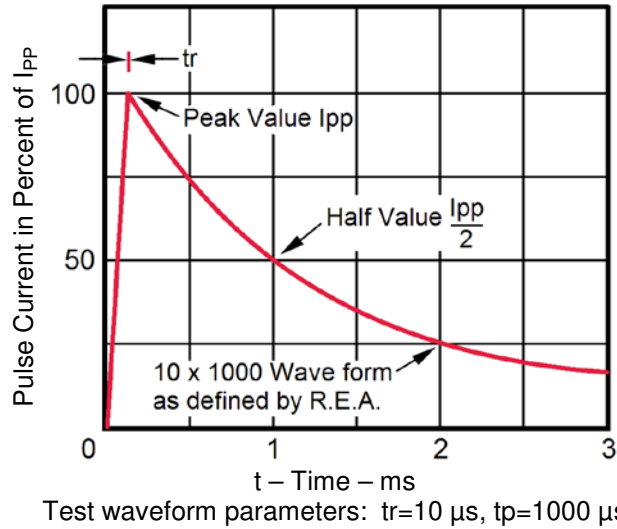


FIGURE 3
Pulse Waveform for 10/1000 Exponential Surge

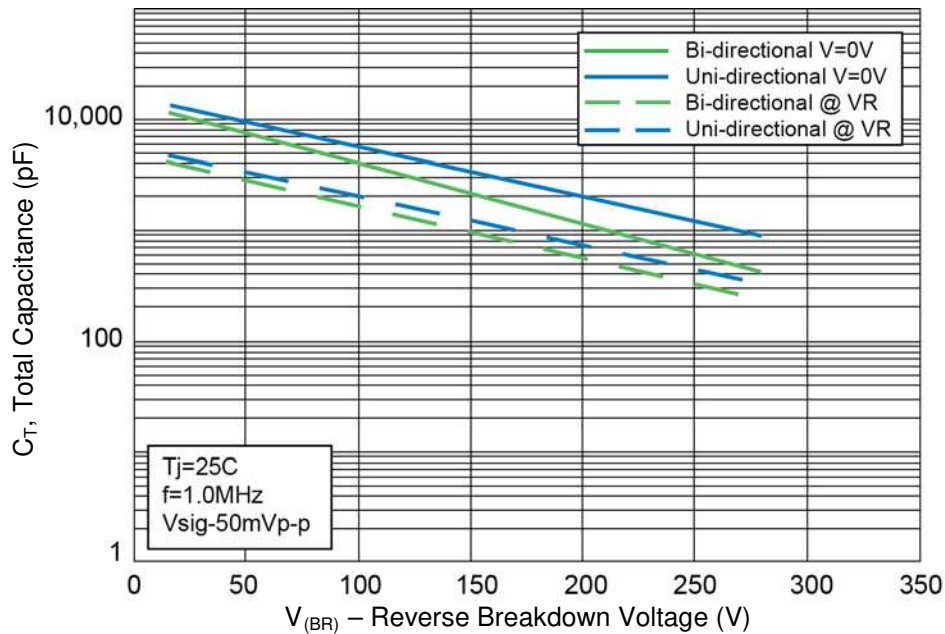


FIGURE 4
Typical Junction Capacitance

GRAPHS (continued)

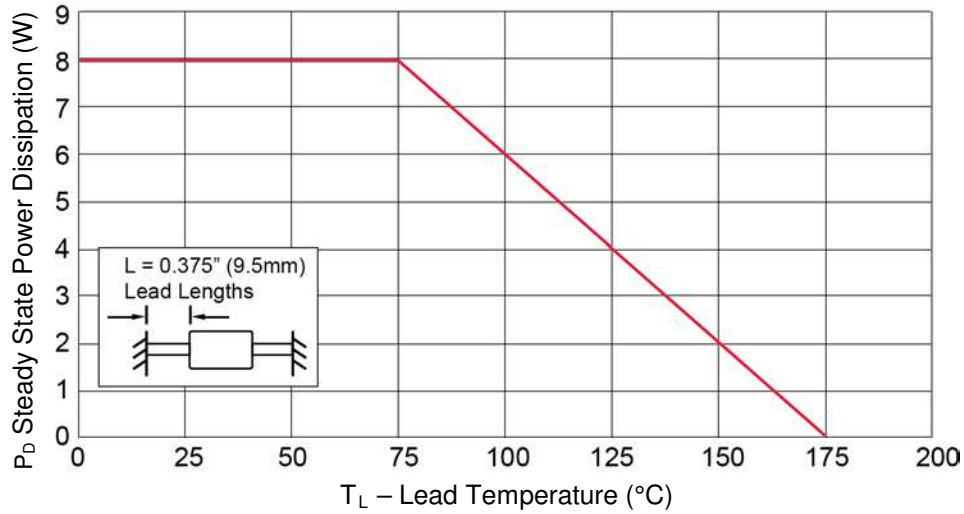


FIGURE 5
Steady State Power Derating Curve

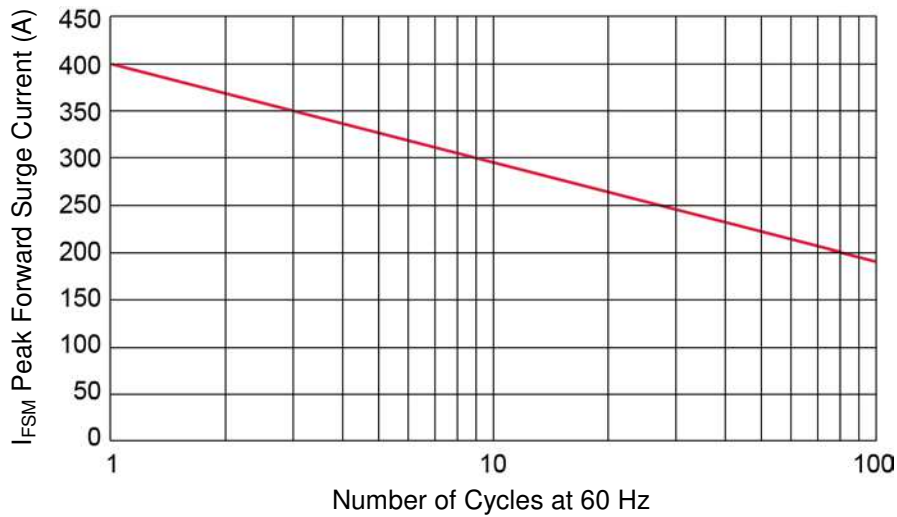
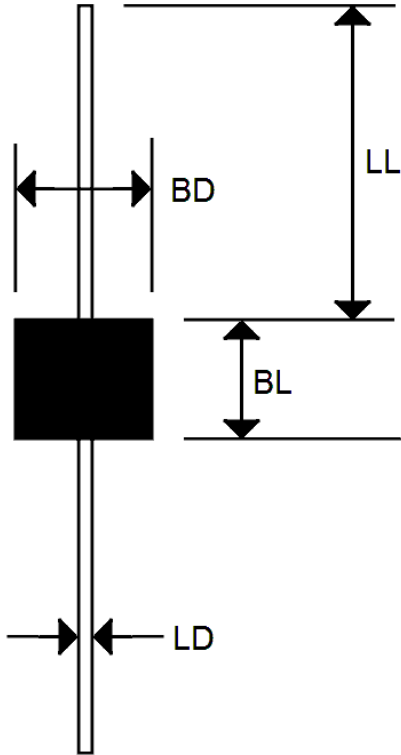


FIGURE 6
Maximum Non-repetitive Forward Surge Current
(Unidirectional Devices Only)

PACKAGE DIMENSIONS


Dim	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
LL	0.750	-	19.05	-
BL	0.340	0.360	8.645	9.135
BD	0.340	0.360	8.645	9.135
LD	0.047	0.053	1.194	1.346