

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









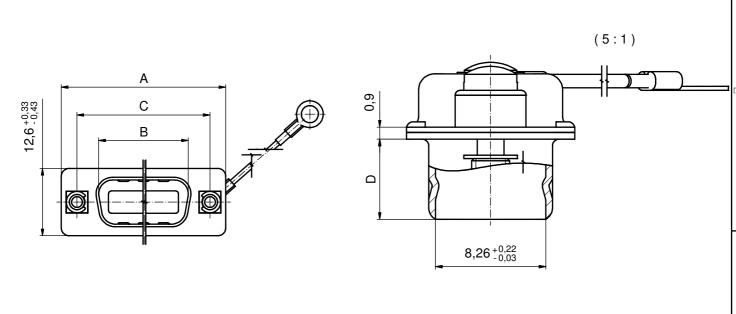

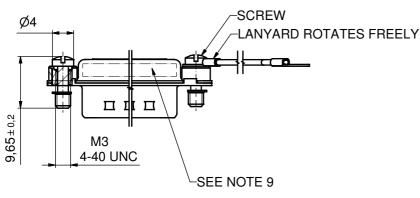



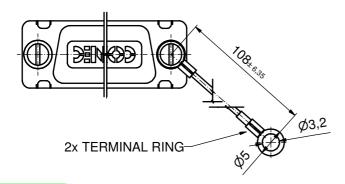

No. of pos.	A -0,76	B +0,25	С	D -0,3
9	31,19	16,79	25,00 +0,12 -0,10	6,12
15	39,52	25,12	33,30 +0,15	6,12
25	53,42	38,84	47,04 ± 0,13	5,99
37	69,70	55,30	63,50 +0,13 -0,11	5,99

Directive 2002/95/EC "RoHS" Compliant

Part No. for socket connector					
No.of pos.	UNC 4-40	M 3			
9	16-001050	16-001000			
15	16-001060	16-001010			
25	16-001070	16-001020			
37	16-001080	16-001030			

NOTES:

- 1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- 2. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- 3. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- 4. SCREW: STEEL; NICKEL PLATED
- 5. WIRE ROPE: STAINLESS STEEL 1.4401
- 6. RETAINING WASHER: STAINLESS STEEL 1.4122
- 7. TERMINAL RING: UNINSULATED, COPPER ALLOY; min. 200 μ inTIN over 80 μ in NICKEL
- 8. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
- 9. CONNECTOR IS PART MARKED: PART NO. CONEC ABC

E # AUTORIZACION		REIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL PPROVAL DATE:	APPROVAL # FREIGABE
ABE # DEBLOCAGE	NAME:	TITLE:	ABE # DEBLOCAGE
APPROVAL # FREIGABE	COMPANY NA	ME: FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	GE #AUTORIZACION
<u> </u>	AFFROVAL#F	THEIGABE # DEBLOCAGE # AUTORIZACION # AFFROVAL	

	T	LIUII G	ND					tol	erance		sca
	SE COPIED OR AND MAY NOT PARTY WITHOUT SHT OF CONEC GML	5 5	BY HAND					ISO	2768-m		ma
		¥ 6	a l							dim. in mm	
COPIED ND MAY ARTY W.	3 9	S R						date	name	title	
	AND AND PAR		DRAWING					drawn	20.11.08	Petker	
	NOT BE ' WAY, A THIRD P 'N.		R					appd.	20.11.08	Fischer	
	DRAWING MAY NODUCED IN ANY ASSED ON TO A TEN PERMISSION ERSHIP AND COP	A H	S					norm			
			X					d-old			dw
			ALI					_	45 =		
			型 <u></u> 戸	18 F	SSE	а	Origin				
	THIS DRAY REPRODUC BE PASSEI WRITTEN I		DO 1	rev.	description	date	name	7		11-C	par

7	scale:	2:1 (5:1)
r	material:	SEE NOTES
nm		
	title:	
		SCREEN CAP
	9-37nos	FOR SOCKET CONNECTOR

9-37pos. FOR SOCKET CONNECTOR
with threaded insert, screw and wire rope
dwg no: | loventor 10 | DIN

	dwg no:	Inventor 10	DIN-
(B)		16K1A2401	A3
		10K1A2401	sh: 1
	part no:	see table	