



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DC-B 6-HD-M25-M

Order No.: 1602054



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1602054>

DUPLICON, aluminum stackable housing for DUPLICON contact inserts, type B6, IP67 protection, with two locking latches, gasket and an M25 cable screw connection thread (without cable screw connection)

Commercial data	
GTIN (EAN)	 4 046356 027755
sales group	D070
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 407 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
07/05/2004



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Design	DC-B6
Height	37 mm
Color	pearl gray

Locking type	With locking latch
Cable exit	Lateral
Type of the screw connection	With M25 thread
Pg screw connection	None
Degree of protection	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC-conductive
Seal material	NBR
Material lock	Stainless steel
Material grip body interlock	PA

Certificates / Approvals




Certification VDE-PZI

Accessories

Item	Designation	Description
General		
1602326	DC-B 6-A-HD-G	DUPLICON, profile gasket for stackable housing, made of conductive EPDM
1690574	HC-M-KV-M25(11-16)	Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M25
1646007	HC-M-KV-M25(14-21)	Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25
Marking		
0816854	EML (26,5X12)R SR	Labels for thermal transfer printers, lettering field: 26.5 mm x 12 mm, 1 roll = 2,500 labels

Diagrams/Drawings

Dimensioned drawing

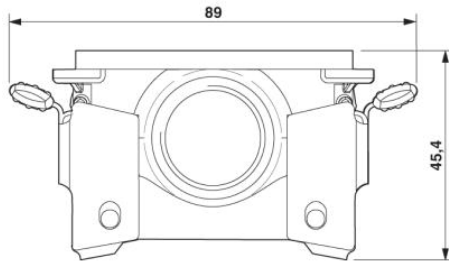

Dimensional drawing

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;