



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Reaction Torque Sensors

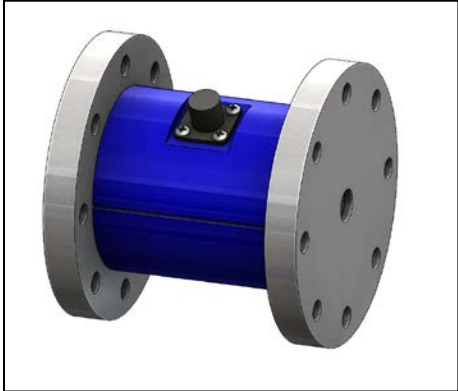

Model 12328




Model 15228

TELEDYNE LECROY Test Services (TLTS) offers a complete line of Reaction Torque Sensors from 10 in-lb to 100,000+ in-lb capacities. All of our sensors utilize precision strain gage technology and have no moving parts.

Reaction sensors offer a lower cost approach to torque measurement by eliminating the need for rotating parts and costly electronics. Contact one of our application engineers for more details.

SPECIFICATIONS for Models 12328 and 15228	
Output at Rated Torque	1.5 - 3 mV/V Nominal
Calibration Accuracy	0.25% Full Scale
Overload Rating	150%
Excitation Maximum DC	10V
Bridge Resistance.....	350 Ohms
Zero Balance	±0.1% Full Scale
Temperature Effect on Zero	0.0025% Full Scale/°F
Compensated Temperature Range	72°F - 150°F ±0.3°F
Duty Cycle.....	Standard
Connector.....	MS 3110P-8-4P or equivalent

(over) 08/17

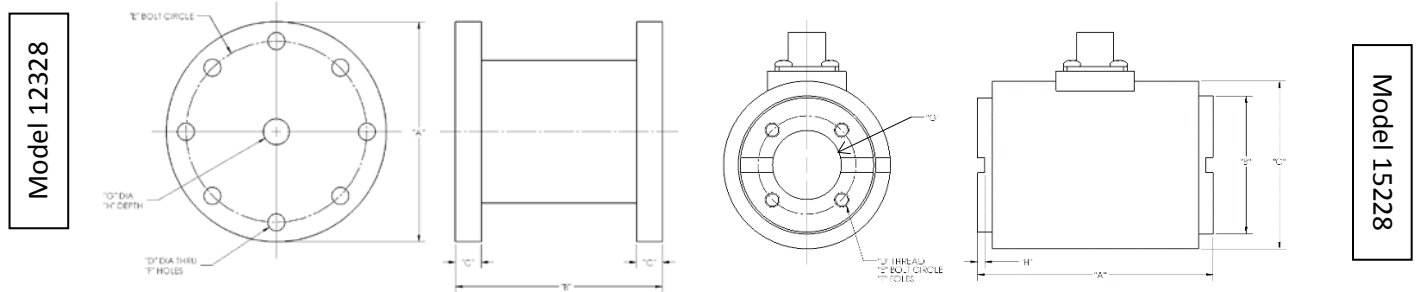

Dimensions (inches/mm)

Part #	Model #	Torque (in-lbs)	Drawing #	A	B	C	D	E	F	G	*H
160296	12328-100K	100000	12328-ASSY-3	6.5 165	5 127	1 25.4	0.52 13.2	4.88 124	8	2 51	0.25 6.4
160294	12328-50K	50000	12328-ASSY-2	5 127	3.5 89	0.75 19	0.39 9.9	4.25 108	8	1.63 41.4	thru hole
160291	12328-20K	20000	12328-ASSY-2	5 127	3.5 89	0.75 19	0.39 9.9	4.25 108	8	2 51	0.25 6.4
160289	12328-10K	10000	12328-ASSY-2	5 127	3.5 89	0.75 19	0.39 9.9	4.25 108	8	2 51	0.25 6.4
160286	12328-5K	5000	12328-ASSY-1	4.25 108	4 101	0.5 12.7	0.33 8.4	3.5 89	8	0.5 13	0.12 3.1
160280	12328-2K	2000	12328-ASSY-1	4.25 108	4 101	0.5 12.7	0.33 8.4	3.5 89	8	0.5 13	0.12 3.1
160277	12328-1K	1000	12328-ASSY-1	4.25 108	4 101	0.5 12.7	0.33 8.4	3.5 89	8	0.5 13	0.12 3.1

Part #	Model #	Torque (in-lbs)	Drawing #	A	B	C	D	E	F	G	H
160314	15228-1000	1000	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160313	15228-500	500	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160312	15228-200	200	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160311	15228-100	100	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160307	15228-50	50	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160304	15228-20	20	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole
160302	15228-10	10	15228-ASSY	3 76	1.75 44.45	2.12 53.85	10-32	1.25 31.75	4	0.87 22.2	thru hole

*Thru hole available upon request.

Please visit <http://teledyne-ts.com/products/reactiontq.html> for detailed drawings and downloadable CAD models.

For custom or heavy-duty torque measurement applications, contact Applications Engineering at Sales_TestServices@Teledyne.com