



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# HC-M-HS-MOD-BU


Order No.: 1605001

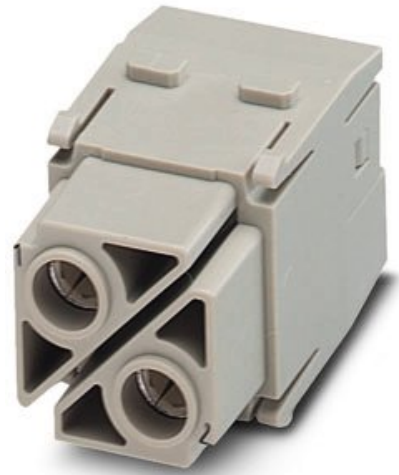

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1605001>

HEAVYCON contact insert module, socket, 2-pos. to 100 A, axial screw connection

**Commercial data**

GTIN (EAN)	 4 017918 893309
sales group	D042
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 452 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
06/13/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Electrical characteristics

Note	For housing HC-B6 up to B48 (housing height min 72 mm), for housing HC-ADVANCE-B6 up to B24, hinged retaining frame HC-M-MHR... required, axial connection for a 4 mm Allen wrench
Rated voltage (III/3)	1000 V
Rated current	100 A
Rated surge voltage	8 kV
Ambient temperature (operation)	-40 °C ... 125 °C
Number of positions	2

### Mechanical characteristics

Conductor cross-section	16 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Connection cross-section AWG	4 ... 2
Stripping length of the individual wire	13 mm
Tightening torque	6 Nm (16 mm <sup>2</sup> ) 7 Nm (25 mm <sup>2</sup> ) 8 Nm (35 mm <sup>2</sup> )
Wire diameter including insulation	11.4 mm
Hexagonal socket	SW 4
Insertion/withdrawal cycles	≥ 500

### General characteristics

Number of module slots	2
Connection method	Axial screw connection
Inflammability class acc. to UL 94	V0
Pollution degree	3
Surge voltage category	III
Assembly instructions	Use HC housing h ≥ 72 mm. Connection of the wires using a 4 mm Allen wrench. Axial screw connection only for stranded wires. Plug-in connections may only be operated only when there is no load/voltage.

Connection	<p><b>Note for axial connection method</b> The specified conductor cross-sections refer to the geometric cross-section of the used conductor. The use of conductors with a geometric cross-section that deviates greatly from the nominal cross-section of the conductor should be checked first. The wiring space of the axial screw technology has been designed for fine strand conductors as per VDE 0295 class 5. Deviating conductor superstructures (e.g. class 6 conductors) must be checked before use. <b>Connection</b> It must be ensured before installation that the ball screw is completely turned back (chamber is open). Twisting the conductors is not allowed. The cores must be pushed up to the end of the contact chamber (until the contact is insulated). Keep the core in this position and tighten it using an Allen key. The required core end must be cut before a reconnection. Tightening the connection screw is allowed only once in order to prevent a breakage of the litz wire.</p>
------------	---

**Material data**

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

**Certificates / Approvals**




Certification CUL, GOST, UL

**Accessories**

Item	Designation	Description
<b>Plug/Adapter</b>		
1636981	HC-M-MHR-PE16	Cable lug for HEAVYCON-MODULAR; PE connection extension to 16 mm <sup>2</sup> , for crimping with crimp pliers


## Diagrams/Drawings

### Diagram

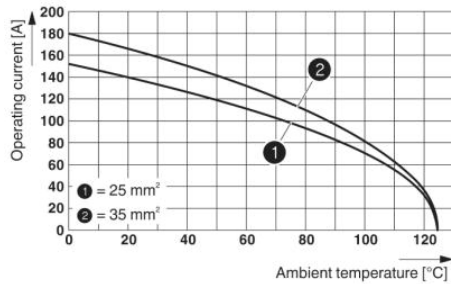


Derating diagram (3 modules in HC-B 24 housing)

### Dimensioned drawing

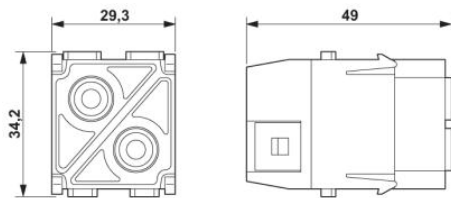


Socket module

### Schematic diagram

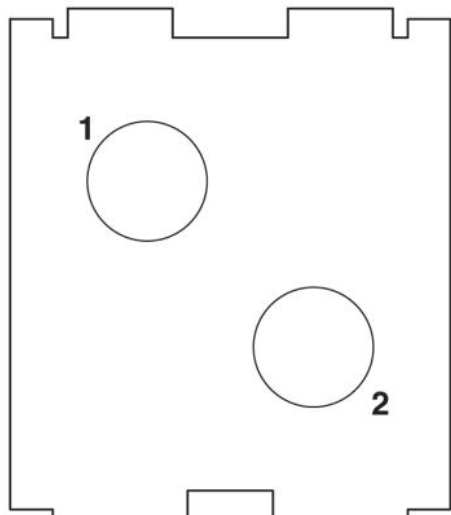

Connector pin assignment

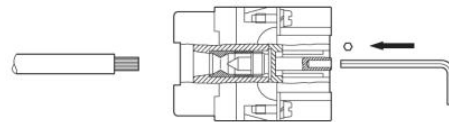

Axial connection

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;