



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




VC-AR3/4M-PEA

Order No.: 1607787

The illustration shows the product version VC-AR2/3M-PEA

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1607787>Panel mounting frame, with PE, for VARIOCON supporting base
elements, type 3, number of insert modules 4

Commercial data

GTIN (EAN)	
sales group	D240
Pack	1 pcs.
Customs tariff	85389099
Catalog page information	Page 361 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/27/2007

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


Note	Required for supporting base elements and voltages > 42 V
Ambient temperature (operation)	-40 °C ... 125 °C
Design	VC3
Conductor cross-section	0.5 mm ² ... 4 mm ² (For PE conductor)

Material data

Inflammability class acc. to UL 94	V0
Contact material	CuZn
Contact surface material	Nickel-plated

Diagrams/Drawings


Functional drawing

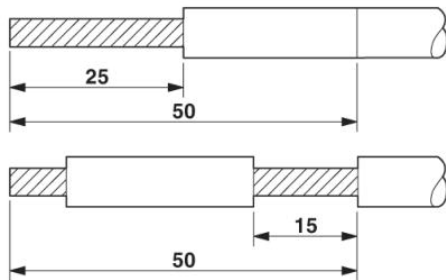


Installation note:

The frame has a PE sheet with a PE connection. Strip the PE conductor 20 mm and slit the insulation over a length of 50 mm. Push the slit insulation forward by 15 mm. Connect the PE contact of the module and clamp it to the PE metal under the PE screw.

Dimensioned drawing

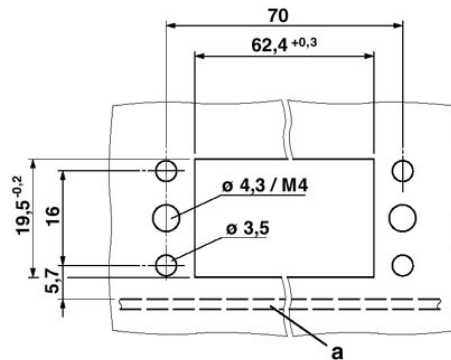

a - PCB

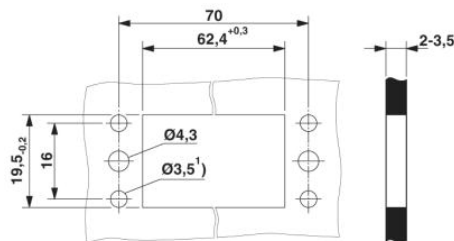

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;