

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

Mounting adapter plates 1.5 mm thick, with UNC countersunk screws, number of inserts: 2x DSUB 25



The illustration shows the product version VC-B 10-ADP/2 DSUB 15-M

## Key commercial data

| Packing unit                         | 1 pc            |
|--------------------------------------|-----------------|
| GTIN                                 | 4 017918 969271 |
| Weight per Piece (excluding packing) | 48.8 GRM        |
| Custom tariff number                 | 85389099        |
| Country of origin                    | Germany         |

#### Technical data

#### General

| Design | VC3 |
|--------|-----|
|        |     |

#### Ambient conditions

| Ambient temperature (operation) | -40 °C 125 °C              |
|---------------------------------|----------------------------|
| Degree of protection            | IP65, when in locked state |

#### Material data

| Seal material | NBR |
|---------------|-----|
| Seal Haleriai | NDN |

### Classifications

#### eCl@ss

| eCl@ss 4.0 | 27140816 |
|------------|----------|
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27189239 |



# Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

## Classifications

## eCl@ss

| eCl@ss 5.1 | 27189239 |
|------------|----------|
| eCl@ss 6.0 | 27144001 |
| eCl@ss 7.0 | 27144001 |

### **ETIM**

| ETIM 2.0 | EC000007 |
|----------|----------|
| ETIM 3.0 | EC000007 |
| ETIM 4.0 | EC000007 |
| ETIM 5.0 | EC000007 |

### UNSPSC


| UNSPSC 6.01   | 43172601 |
|---------------|----------|
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11     | 43172601 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 31261501 |

## Drawings



# Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

Drilling diagram

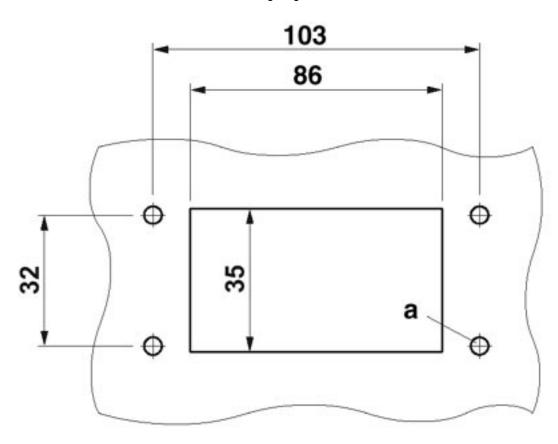

Panel cutout a = When M4 screws are used: M4 or diameter 4.5 mm

© Phoenix Contact 2013 - all rights reserved http://www.phoenixcontact.com