



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Cable connector - CA-07S1N12T008 - 1620208

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Cable connector, angled, shielded: yes, Screw locking, M23, No. of pos.: 7, type of contact: Socket, Solder connection, cable diameter range: 10 mm ... 14.5 mm



The figure shows the 6-pos. product version

### Why buy this product

- ✓ Angled cable outlet for confined spaces
- ✓ Can be adapted to various applications, thanks to adjustable cable outlet direction
- ✓ Safe use in the field, thanks to high degree of protection
- ✓ Connector for flexible on-site assembly
- ✓ Consistent EMC protection for reliable transmission of signals
- ✓ Solder connection: proven connection technology for various litz wires



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 STK                                                                                                   |
| GTIN         | <br>4 046356 818513 |
| GTIN         | 4046356818513                                                                                           |

### Technical data

#### Temperature range

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### Data of the insulating body

|                           |                   |
|---------------------------|-------------------|
| Coding                    | N                 |
| Insulator material        | PBT               |
| Contact material          | CuZn              |
| Contact surface material  | Ni/Au             |
| Contact connection method | Solder connection |
| Type of contacts          | Socket            |
| Application               | Signal            |

## Cable connector - CA-07S1N12T008 - 1620208

### Technical data

#### Data of the insulating body

|                                                |                      |
|------------------------------------------------|----------------------|
| Number of positions                            | 7                    |
| Contact diameter of power contacts             | 2 mm                 |
| Litz wire cross section of power contacts min. | 0.08 mm <sup>2</sup> |
| Litz wire cross section of power contacts max. | 2.5 mm <sup>2</sup>  |
| Nominal current per power contact at 25°C      | 20 A                 |
| Nominal voltage, power contact                 | 300 V                |
| Rated surge voltage                            | 2.5 kV               |
| Overvoltage category                           | II                   |
| Degree of pollution                            | 3                    |

#### Housing data

|                                        |                                                                      |
|----------------------------------------|----------------------------------------------------------------------|
| Housing material                       | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking                        | Screw locking                                                        |
| Degree of protection (when plugged in) | IP67                                                                 |
| Thread type                            | M23                                                                  |

#### Cable seal data


|                  |                   |
|------------------|-------------------|
| Cable diameter   | 10 mm ... 14.5 mm |
| Sealing material | NBR               |

#### Environmental Product Compliance


|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Schematic diagram



Dimensional drawing

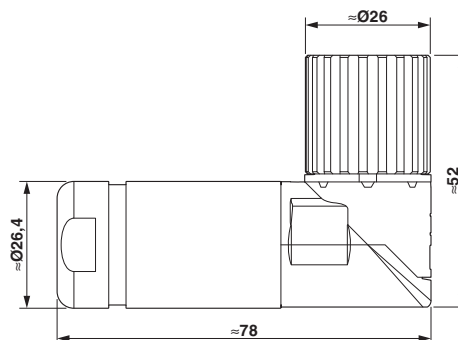

### Approvals

#### Approvals

## Cable connector - CA-07S1N12T008 - 1620208

### Approvals

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals

### Approval details

|                    |                                                                                   |                                                                                                                                                                        |
|--------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E335019-20141210 |
|                    |                                                                                   |                                                                                                                                                                        |
| Nominal voltage UN | 300 V                                                                             |                                                                                                                                                                        |
| Nominal current IN | 20 A                                                                              |                                                                                                                                                                        |
| mm²/AWG/kcmil      | 14                                                                                |                                                                                                                                                                        |

|                    |                                                                                     |                                                                                                                                                                        |
|--------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E335019-20141210 |
|                    |                                                                                     |                                                                                                                                                                        |
| Nominal voltage UN | 300 V                                                                               |                                                                                                                                                                        |
| Nominal current IN | 10 A                                                                                |                                                                                                                                                                        |
| mm²/AWG/kcmil      | 14                                                                                  |                                                                                                                                                                        |

|                  |                                                                                     |
|------------------|-------------------------------------------------------------------------------------|
| cULus Recognized |  |
|------------------|-------------------------------------------------------------------------------------|

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>