



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Pin headers SL 5.00/135B

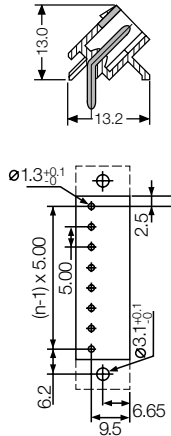



Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216

Solder pin length		3.2 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.00/2/135B	1630480000	1631050000	100	
3	SL 5.00/3/135B	1630490000	1631060000	100	
4	SL 5.00/4/135B	1630500000	1631070000	100	
5	SL 5.00/5/135B	1630510000	1631080000	50	
6	SL 5.00/6/135B	1630520000	1631090000	50	
7	SL 5.00/7/135B	1630530000	1631100000	50	
8	SL 5.00/8/135B	1630540000	1631110000	50	
9	SL 5.00/9/135B	1630550000	1631120000	50	
10	SL 5.00/10/135B	1630560000	1631130000	50	
11	SL 5.00/11/135B	1630570000	1631140000	50	
12	SL 5.00/12/135B	1630580000	1631150000	50	
13	SL 5.00/13/135B	1630590000	1631160000	50	
14	SL 5.00/14/135B	1630600000	1631170000	50	
15	SL 5.00/15/135B	1630610000	1631180000	50	
16	SL 5.00/16/135B	1630620000	1631190000	50	
17	SL 5.00/17/135B	1630630000	1631200000	20	
18	SL 5.00/18/135B	1630640000	1631210000	20	
19	SL 5.00/19/135B	1630650000	1631220000	20	
20	SL 5.00/20/135B	1630660000	1631230000	20	
21	SL 5.00/21/135B	1630670000	1631240000	20	
22	SL 5.00/22/135B	1630680000	1631250000	20	
23	SL 5.00/23/135B	1630690000	1631260000	20	
24	SL 5.00/24/135B	1630700000	1631270000	20	

Accessories	Page
Mounting	187*
Marking	190
Coding	192, 193
Miscellaneous	-

Pin headers SL 5.00/180

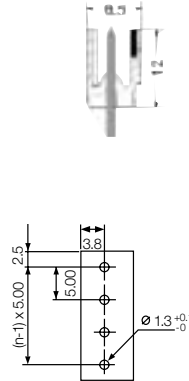



Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216

Solder pin length		3.2 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.00/2/180	1581320000	1626390000	100	
3	SL 5.00/3/180	1581330000	1626400000	100	
4	SL 5.00/4/180	1581340000	1626410000	100	
5	SL 5.00/5/180	1581350000	1626420000	50	
6	SL 5.00/6/180	1581360000	1626430000	50	
7	SL 5.00/7/180	1581370000	1626440000	50	
8	SL 5.00/8/180	1581380000	1626450000	50	
9	SL 5.00/9/180	1581390000	1626460000	50	
10	SL 5.00/10/180	1581400000	1626470000	50	
11	SL 5.00/11/180	1581410000	1626480000	50	
12	SL 5.00/12/180	1581420000	1626490000	50	
13	SL 5.00/13/180	1581430000	1626500000	50	
14	SL 5.00/14/180	1581440000	1626510000	50	
15	SL 5.00/15/180	1581450000	1626520000	50	
16	SL 5.00/16/180	1581460000	1626530000	50	
17	SL 5.00/17/180	1581470000	1626540000	20	
18	SL 5.00/18/180	1581480000	1626550000	20	
19	SL 5.00/19/180	1581490000	1626560000	20	
20	SL 5.00/20/180	1581500000	1626570000	20	
21	SL 5.00/21/180	1581510000	1626580000	20	
22	SL 5.00/22/180	1581520000	1626590000	20	
23	SL 5.00/23/180	1581530000	1626600000	20	
24	SL 5.00/24/180	1581540000	1626610000	20	

Accessories	Page
Mounting	-
Marking	190
Coding	192, 193
Miscellaneous	-

Pin headers SL 5.00/180B

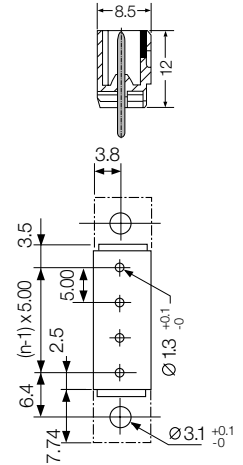

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216

Solder pin length		3.2 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.00/2/180B	1581780000	1626620000	100	
3	SL 5.00/3/180B	1581790000	1626630000	100	
4	SL 5.00/4/180B	1581800000	1596130000	100	
5	SL 5.00/5/180B	1581810000	1626640000	50	
6	SL 5.00/6/180B	1581820000	1626650000	50	
7	SL 5.00/7/180B	1581830000	1626660000	50	
8	SL 5.00/8/180B	1581840000	1596140000	50	
9	SL 5.00/9/180B	1581850000	1626670000	50	
10	SL 5.00/10/180B	1581860000	1626680000	50	
11	SL 5.00/11/180B	1581870000	1626690000	50	
12	SL 5.00/12/180B	1581880000	1603310000	50	
13	SL 5.00/13/180B	1581890000	1626700000	50	
14	SL 5.00/14/180B	1581900000	1626710000	50	
15	SL 5.00/15/180B	1581910000	1626720000	50	
16	SL 5.00/16/180B	1581920000	1626730000	50	
17	SL 5.00/17/180B	1581930000	1626740000	20	
18	SL 5.00/18/180B	1581940000	1626750000	20	
19	SL 5.00/19/180B	1581950000	1626760000	20	
20	SL 5.00/20/180B	1581960000	1626770000	20	
21	SL 5.00/21/180B	1581970000	1626780000	20	
22	SL 5.00/22/180B	1581980000	1626790000	20	
23	SL 5.00/23/180B	1581990000	1626800000	20	
24	SL 5.00/24/180B	1582000000	1626810000	20	

Accessories	Page
Mounting	187*
Marking	190
Coding	192, 193
Miscellaneous	-

* See Note, page 187