



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




HC-M-17-MOD-ST

Order No.: 1636473

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1636473>

HEAVYCON contact insert module, male, 17-pos., crimp connection

Commercial data

| | |
|--------------------------|------------------------------------------------------------------------------------------------------|
| GTIN (EAN) |  4 046356 028219 |
| sales group | D042 |
| Pack | 2 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 457 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
08/15/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Electrical characteristics**

| | |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note | For housing HC-B6 to B48, for housing HC-ADVANCE-B6 to B24, hinged retaining frame HC-M-MHR... necessary, crimp contacts CK1,6-ED... (crimp contacts not in scope of supply) |
| Rated voltage (III/3) | 160 V |
| Rated current | 10 A |
| Rated surge voltage | 2.5 kV |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Number of positions | 17 |

Mechanical characteristics

| | |
|-----------------------------------------|----------------------------------------------|
| Conductor cross-section | 0.14 mm ² ... 2.5 mm ² |
| Connection cross-section AWG | 26 ... 14 |
| Stripping length of the individual wire | 8 mm (6 (2.5 mm ²)) |
| Insertion/withdrawal cycles | ≥ 500 |

General characteristics

| | |
|------------------------------------|------------------------------------------------------------------------------------------------------|
| Number of module slots | 1 |
| Connection method | Crimp connection |
| Inflammability class acc. to UL 94 | V0 |
| Pollution degree | 3 |
| Surge voltage category | III |
| Assembly instructions | Housing height ≥ 52 mm. Plug-in connections may only be operated only when there is no load/voltage. |

Material data

| | |
|--------------------------|-----------------------|
| Contact material | Copper alloy |
| Contact surface material | Ag (alternatively Au) |
| Contact carrier material | PC |

Certificates / Approvals




Certification

UL


Diagrams/Drawings

Diagram

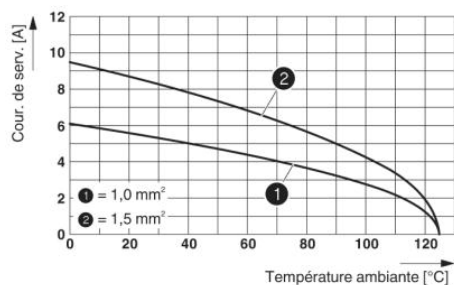


Derating diagram (6 modules in HC-B 24 housing)

Dimensioned drawing

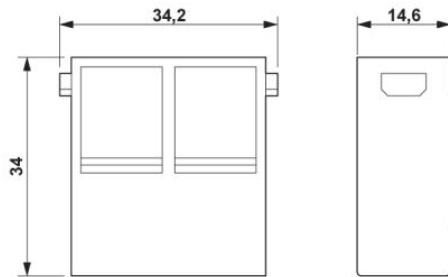

Male insert

Schematic diagram

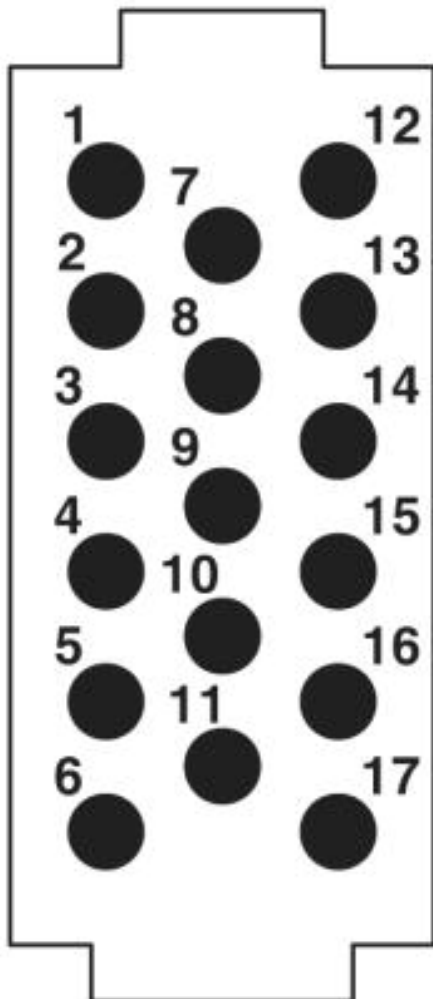

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;