



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES


1638R
1638



Molded Unshielded RF Coils

DASH NUMBER*	INDUCTANCE (μH) ±5%	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
--------------	---------------------	----------------------	-------------------	------------------------------	-----------------------------

Actual Size

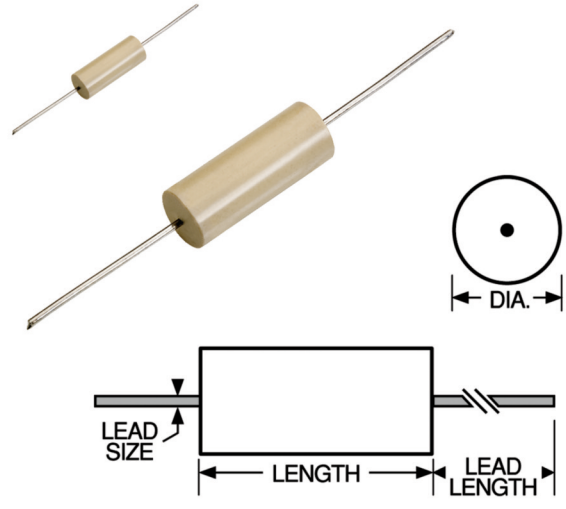

SERIES 1638 IRON CORE						
-00J	270	65	0.79	5.7	11.0	143
-02J	300	65	0.79	5.4	11.5	140
-04J	330	65	0.79	5.1	12.0	136
-06J	360	65	0.79	4.8	12.5	134
-08J	390	65	0.79	4.5	16.3	117
-10J	430	65	0.79	4.2	17.1	115
-12J	470	65	0.79	3.9	17.9	112
-14J	510	65	0.79	3.7	18.8	109
-16J	560	65	0.79	3.8	19.5	107
-18J	620	65	0.79	3.3	25.9	93
-20J	680	65	0.79	3.1	27.2	91
-22J	750	65	0.79	2.9	28.6	88
-24J	820	65	0.79	2.7	30.0	86
-26J	910	65	0.79	2.5	31.5	84
-28J	1000	65	0.79	2.3	33.0	82

Optional Tolerances: H = 3% G = 2% F = 1%
 *Complete part # must include series # PLUS the dash #
 For surface finish information, refer to www.delevanfinishes.com

Physical Parameters

	Inches	Millimeters
Length	0.375 ± 0.010	9.53 ± 0.25
Diameter	0.156 ± 0.010	3.96 ± 0.25
Lead Size		
AWG #22 TCW	0.025 ± 0.002	0.635 ± 0.051
Lead Length	1.44 ± 0.12	36.58 ± 3.05

Current Rating at 90°C Ambient 35°C Rise

Operating Temperature -55°C to +125°C

Maximum Power Dissipation at 90°C 0.312 W

Weight Max. (Grams) 1.0

Core Material Iron

Marking DELEVAN; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1638R-16J

<i>Front:</i>	<i>Reverse:</i>
DELEVAN	R 0828A
560uH±5%	

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14" reel, 4000 pieces max.

Made in the U.S.A.