



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VS-08-BU-RJ45-6-F/PK

Order No.: 1652949

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652949>

RJ45 socket insert, for the Freenet system, CAT6, 8-pos., shielded, with cable connection (IDC fast connection), for litz and solid wires AWG 24 ... 22


Ethernet



Product notes

WEEE/RoHS-compliant since:
05/23/2006

**Commercial data**

GTIN (EAN)	 4 017918 961640
sales group	D511
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 195 (PC-2009)

<http://>

www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	8
Number of slots	1
Shielded	Yes
Insertion/withdrawal cycles	≥ 750

Type of connection	IDC
Conductor cross-section	0.14 mm ² ... 0.35 mm ²
Connection cross-section AWG	26 ... 22
Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (assembly)	0 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

Material data

Inflammability class acc. to UL 94	V0
Contact carrier material	PC
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20

Electrical characteristics

Number of positions	8
Transmission characteristics (category)	CAT6
Rated current	1 A
Surge voltage category	I
Pollution degree	1

Certificates / Approvals



Certification

CUL Listed, GL, UL Listed

Accessories

Item	Designation	Description
General		
1653744	VS-A-F-IP67	Panel mounting frame, IP67, for Freenet system, for round panel cutout, with grommet, without mounting screws, color: gray
1658668	VS-A-F-IP67-BK	Panel mounting frame, IP67, for Freenet system, for round panel cutout, with grommet, without mounting screws, color: black


1608197	VS-PPC-F1-RJ45-POBK-1R-F	RJ45 panel mounting frame, IP67, for push-pull interlocking, plastic, with the Freenet system, for square panel cutout, with grommet, without mounting screws
---------	--------------------------	---

Panel mounting frame

1405222	VS-PPC-F1-RJ45-MNNA-1C-F	RJ45 panel mounting frame, IP67, for push-pull interlocking, metal, with Freenet system, for round mounting cutout, with seal
1405358	VS-PPC-F1-RJ45-MNNA-1R-F	RJ45 panel mounting frame, IP67, for push-pull interlocking, metal, with the Freenet system, for square panel cutout, with grommet, without mounting screws


Diagrams/Drawings

Dimensioned drawing

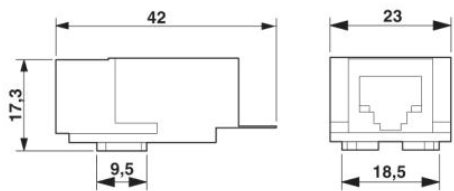

RJ45 female insert

Schematic diagram

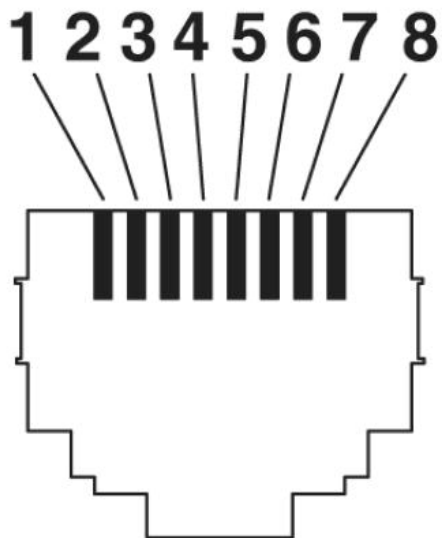

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;