



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PCM-3363

Intel® Atom™ N455/D525 PCI-104 SBC, VGA, LVDS, Ethernet, USB, COM, SATA, Onboard Memory

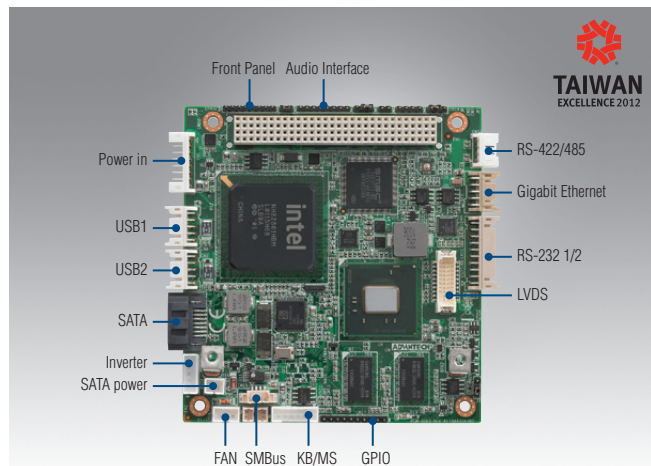

VxWorks® Windows Embedded CE™ CNX susiAccess™ CE FCC

Features

- Intel® Atom N455 1.66 GHz Single Core/D525 Dual Core 1.8 GHz Processor
- Supports extended temperature -40 ~ 85° C
- 24-bit LVDS support and onboard 1 GB DDR3 800 MHz memory
- HALT tested and 100% locked connector
- Supports Lite iManager, SUSIAccess and Embedded Software APIs

Software APIs:




Utilities:



Specifications

Processor System	CPU	Intel Atom N455 Single Core 1.66 GHz Intel Atom D525 Dual Core 1.8 GHz	
	Frequency	1.66 GHz/1.8 GHz	
	L2 Cache	512 KB/1 MB	
	System Chipset	Intel Atom N455/D525 + ICH8M	
	BIOS	AMI 16 Mbit	
Memory	Technology	DDR3 800 MHz	
	Max. Capacity	1 GB	
	On board memory	1GB DDR3 800 MHz Memory	
Display	Chipset	Intel Atom N455/D525	
	VRAM	Shared system memory up to 224 MB	
	Graphics Engine	Intel Atom N455 Single Core:	Gen 3.5 graphic core, DX9 compliant, MPEG2 Hardware Acceleration, 200 MHz
		Intel Atom D525 Dual Core:	Gen 3.5 graphic core, DX9 compliant, MPEG2 Hardware Acceleration, 400 MHz
	LVDS	Single channel 18/24-bit single channel LVDS up to 1366 x 768 (WXGA)	
	VGA	Intel Atom N455 Single Core up to 1400 x 1050 (SXGA) Intel Atom D525 Dual Core up to 2048 x 1536	
Dual Display	VGA+LVDS		
Ethernet	Interface	10/100/1000 Mbps	
	Controller	ICH8M + Intel 82567V (PHY), support Wake-on-LAN	
	Connector	Locked Box Header	
WatchDog Timer		Output System Reset, Programmable counter from 1 ~ 255 minutes/ seconds	
Storage	CompactFlash	1 CompactFlash socket (Type I/II)	
	SATA	SATAII, up to 3.0 GB/s (300 MB/s)	
Internal I/O	USB	4 x USB 2.0	
	Serial	2 RS-232 from COM1/2, 1 RS-422/485 from COM3 (ESD protection for RS-232: Air gap ±15kV, Contact ±8kV)	
	SMBus	1 (configurable to I²C by customer's request)	
	Keyboard/Mouse	1	
	GPIO	8-bit general purpose input/output	
	Audio	Intel High Definition audio interface (requires an audio extension module P/N: PCA-AUDIO-HDA1E)	
	Expansion	PCI-104 Slot	1
Power	Power Type	ATX/AT	
	Power Supply Voltage	5 V ± 5% only to boot up (12 V is optional for LCD inverter and add on card)	
	Power Management	ACPI	
	Power Consumption (Typical)	N455: 1.404A @ +5 V (7.02 Watts); D525: 1.85 A @ +5 V (9.25 Watts)	
	Power Consumption (Max, test in HCT)	N455: 2.365A @ +5 V (11.825 Watts); D525: 2.695 A @ +5 V (13.475 Watts)	
Battery		Lithium 3 V / 210 mAh	
Environment	Operational	0 ~ 60° C (32 ~ 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)	
	Non-Operational	-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing	
Physical Characteristics	Dimensions (L x W)	96 x 90 mm (3.8" x 3.5")	
	Weight	0.664 kg (1.46 lb) (with heat-sink)	
	Height	Top side: 14.4 mm, 19.4 mm (D, Z & Z2); Bottom side: 10.6 mm	

Block Diagram

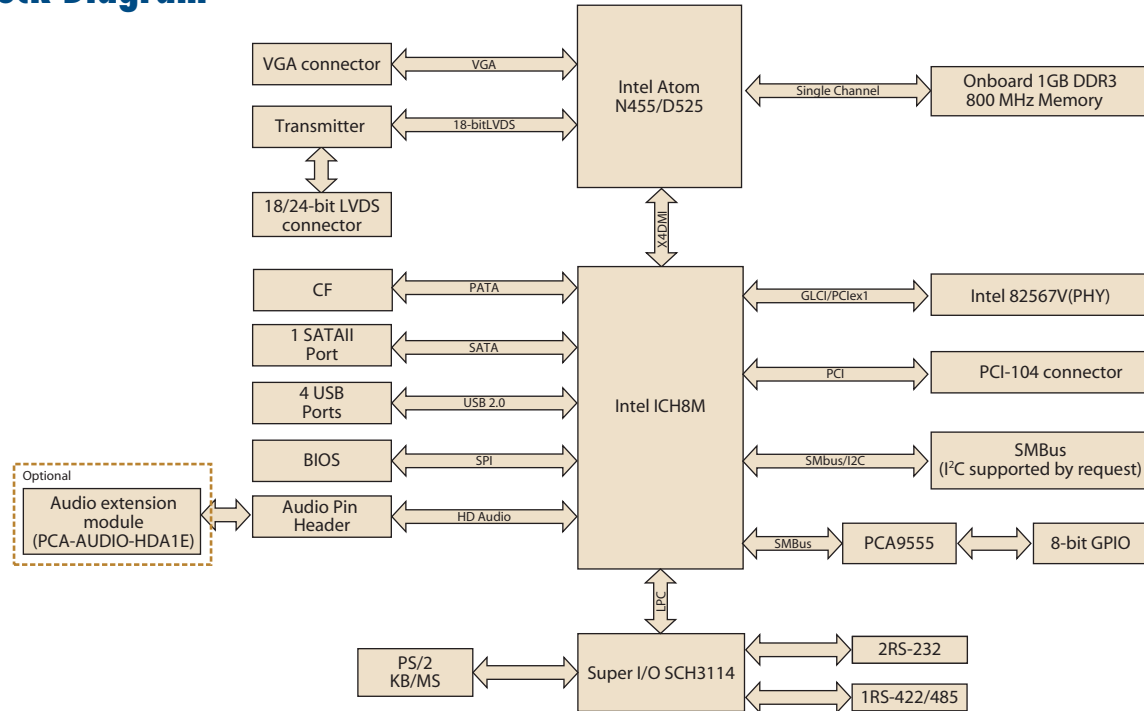

Ordering Information

Part Number	CPU	L2 Cache	Memory	VGA	LVDS	GbE	USB 2.0	RS-232	RS-485	Expansion	Thermal Solution	Operating Temp
PCM-3363N-1GS6A1E	Atom N455 (1.66 GHz)	512 KB	Onboard 1 GB DDR3	1	18/24-bit	1	4	2	1	PCI-104	Passive	0 ~ 60° C
PCM-3363D-1GS8A1E	Atom D525 (1.8 GHz)	1 MB	Onboard 1 GB DDR3	1	18/24-bit	1	4	2	1	PCI-104	Active	0 ~ 60° C
PCM-3363Z-1GS6A1E	Atom N455 (1.66 GHz)	512 KB	Onboard 1 GB DDR3	1	18/24-bit	1	4	2	1	PCI-104	Passive	-20 ~ 80° C
PCM-3363Z2-1GS6A1E	Atom N455 (1.66 GHz)	512 KB	Onboard 1 GB DDR3	1	18/24-bit	1	4	2	1	PCI-104	Passive	-40 ~ 85° C

Note: Passive = fanless; Active = with fan

Packing List

Part No.	Description	Quantity
	PCM-3363 SBC	
	Startup Manual	
	Utility CD	
1700000898	VGA cable D-SUB 15P(F)/12P-1.25 MM 15 cm	1
1700003491	ATX/AT power cable 1*8P-2.0/B4P-5.08*2 15 cm	1
1700060202	Cable 6P-6P-6P PS/2 KB & Mouse 20cm	1
1703040157	RS-422/485 W/D-SUB COM 4P 15 cm	1
1703060053	PS2 cable 6P (MINI-DIN)-6P (Wafer 2.0 mm) 6 cm	1
1700019000	USB cable 2-port 2.0 mm pitch w/ bracket 26 cm (w/ locked)	1
1700008941	SATA data cable 7p 32 cm (w/ locked)	1
1703150102	SATA power cable B4P-5.08/SATA 15P 10 cm	1
1700018999	RS-232 x2 ports 2.0 mm 22 cm (w/ locked)	1
1700019001	LAN cable RJ-45/2*5P-2.0 15 cm (w/ locked)	1
9660104000	PC/104 screw and copper post package	1
1960051405N001	Heatsink with FAN for PCM-3363D only (79.66 x 77.97 x 17.22 mm)	1
1960051403N001	Heatsink for PCM-3363N only (79.66 x 77.97 x 12.22 mm)	1
1960051404N001	Heatsink for PCM-3363Z&Z2 series only (79.66 x 77.97 x 17.22 mm)	1

Optional Accessories

Part No.	Description
1960051701N001	Heat spreader (79.66 x 77.98 x 10.32 mm) for PCM-3363
1653130421	PCI-104 connector 120-pin (Long pin)
PCA-AUDIO-HDA1E	Audio Extension module with bracket
1700018427	Audio cable connecting PCM-3363 and PCA-AUDIO-HDA1E
1700018259	SATA power cable for onboard connector (5V only)

Embedded OS/API

Embedded OS/API	Part No.	Description
WES7	2070011094	WES7E PCM-3363 V5.1 ENG
WinCE	2070010619	WinCE 6.0 Pro PCM-3363 V1.2 ENG
	2070011056	WinCE 7.0 Pro PCM-3363 V1.0 ENG
	2070010324	XPE WES2009 PCM-3363 V4.0 ENG
Win XPE	2070010323	XPE WES2009 PCM-3363 V4.0 MUI24
		6.5
Linux		Ubuntu 10.04.1
VxWorks		6.8
Software API		SUSI V3.0