



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VS-04-BUB-FK-F/IP67

Order No.: 1653867
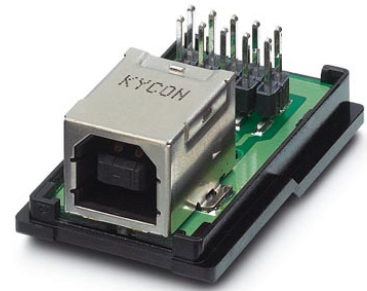
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1653867>

USB socket insert, 4-pos., socket USB type B on flat-ribbon cable terminal strip, pitch 2.54, for the Freenet system in the panel mounting frame, IP20 terminal outlet, 19" patch panel and service interface

Commercial data

EAN	4017918970192
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0156 KG
Catalog page information	Page 310 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
09/20/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	4
Insertion/withdrawal cycles	≥ 1000
Type of connection	Flat-ribbon cable connection, pitch 2.54 mm
Ambient temperature (operation)	-15 °C ... 65 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	PC
Contact carrier material	Thermoplastic
Contact material	Copper alloy
Contact surface material	Gold over nickel
Degree of protection	IP20


Electrical characteristics

Rated voltage (III/3)	30 V
Rated current	1 A
Insulation resistance	$\geq 1 \text{ G}\Omega$
Transmission characteristics (category)	USB 2.0

Diagrams/Drawings

Schematic diagram

Pin	USB B
1	GND
2	
3	Shield
4	
5	D+
6	D-
7	Shield
8	
9	VBUS
10	

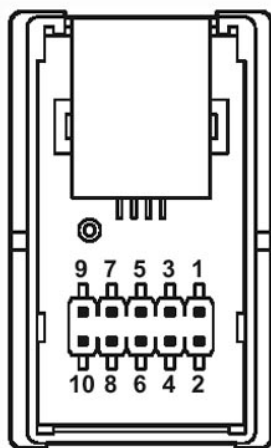

Contact assignment

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;