



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



D-SUB power contact - VS-BU-SC-2,6 - 1655470

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



POWER contact, for D-SUB combination inserts, screw connection, socket, straight, rated current 20 A, gold-plated



Key commercial data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 30 pc |
| Weight per Piece (excluding packing) | 2.6 GRM |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

Mechanical characteristics

| | |
|-------------------------------------|--------------------------------------------|
| Insertion/withdrawal cycles | ≥ 500 |
| Connection method | Screw connection |
| Conductor cross section | 0.75 mm ² ... 2 mm ² |
| Connection cross section AWG | 18 ... 14 |
| Insertion force per signal contact | ≤ 7.00 N |
| Extraction force per signal contact | approx. 5 N |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -55 °C ... 155 °C |
|---------------------------------|-------------------|

Material data

| | |
|--------------------------|------------------------------|
| Contact material | Copper alloy |
| Contact surface material | Hard gold-plated over nickel |

Electrical characteristics

| | |
|---------------|------|
| Rated current | 40 A |
|---------------|------|

D-SUB power contact - VS-BU-SC-2,6 - 1655470

Technical data

Electrical characteristics

| | |
|-----------------------|--------------------------|
| Insulation resistance | $\geq 5 \text{ G}\Omega$ |
|-----------------------|--------------------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27261202 |
| eCl@ss 7.0 | 27440204 |
| eCl@ss 8.0 | 27440204 |

ETIM


| | |
|----------|----------|
| ETIM 2.0 | EC000796 |
| ETIM 3.0 | EC000796 |
| ETIM 4.0 | EC000796 |
| ETIM 5.0 | EC000796 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |

Drawings

Dimensioned drawing

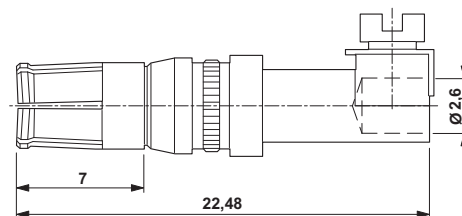

D-SUB power contact socket

