



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



D-SUB cable - VS-25-DSUB-20-LI-2,0 - 1656301

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable shielded, 25-pos., stranded (7-wire), cable color RAL 7000 (gray), IP20 degree of protection, head 1 with socket shell 3 and straight cable outlet, head 2 with pin shell 3 and straight cable outlet, length: 2 m



Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 STK |
| GTIN | |
| GTIN | 4046356029780 |

Technical data

Mechanical characteristics

| | |
|-----------------------------|----------|
| Number of positions | 25 |
| Insertion/withdrawal cycles | ≥ 50 |
| Cable outlet | straight |
| Length of cable | 2 m |
| Degree of protection | IP20 |

Ambient conditions

| | |
|---------------------------------|----------------|
| Ambient temperature (operation) | 0 °C ... 70 °C |
| Degree of protection | IP20 |

Material data

| | |
|--------------------------|--------------|
| Housing material | PVC |
| Contact material | Copper alloy |
| Contact surface material | gold-plated |
| Outer sheath, material | PVC |

Electrical characteristics

| | |
|---------------------|-----|
| Number of positions | 25 |
| Rated current | 1 A |

D-SUB cable - VS-25-DSUB-20-LI-2,0 - 1656301

Technical data

Electrical characteristics


| | |
|-----------------------|-------|
| Overvoltage category | III |
| Degree of pollution | 2 |
| Rated voltage (III/3) | 125 V |

Environmental Product Compliance


| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings


Dimensional drawing

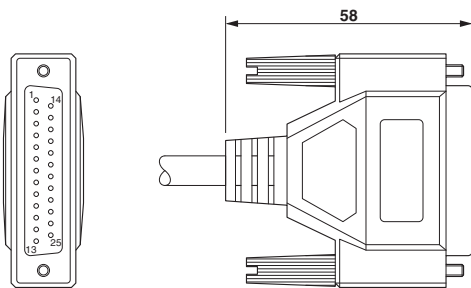


Dimensional drawing

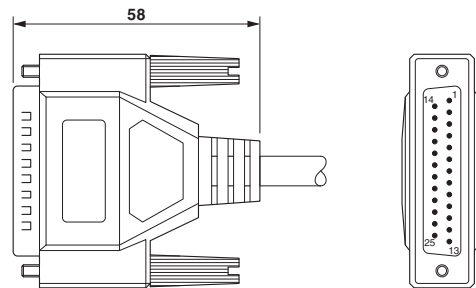


Circuit diagram

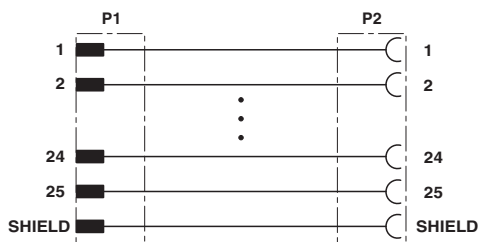

Schematic diagram

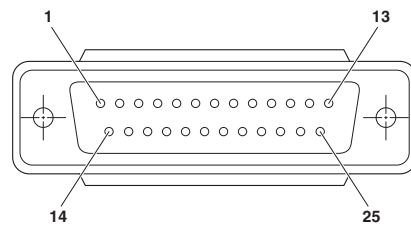

Schematic diagram

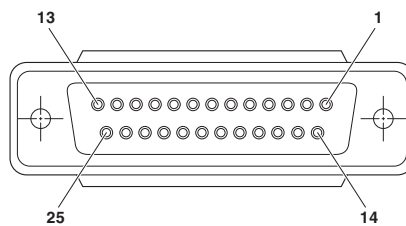

Approvals

Approvals

D-SUB cable - VS-25-DSUB-20-LI-2,0 - 1656301


Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|---|---------|
| EAC |  | B.00767 |
|-----|---|---------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>