



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 24 solid (1-wire), RAL 5021 (water blue), RJ45/IP67 on open cable end, length: 5 m



Ethernet

Key commercial data

Packing unit	1 1
Minimum order quantity	10 1
Weight per Piece (excluding packing)	354.0 GRM
Custom tariff number	85444210
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	4
Shielded	Yes
Cable structure	2x2xAWG24/1; S-UTP
Length of cable	5 m

Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)
	(Plug / socket)
Degree of protection	IP67

Material data

Outer sheath, material	Halogen-free compound, HM 2 in acc. with VDE 0207
External sheath, color	water blue RAL 5021

Electrical characteristics

Rated voltage (III/3)	60 V
-----------------------	------

- VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801

ETIM


ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501


Drawings

Dimensioned drawing

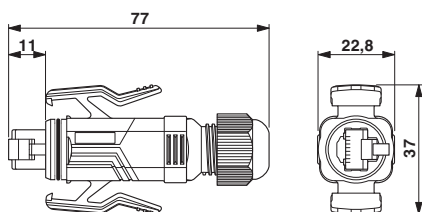

RJ45 connectors, IP67, QUICKON fast connection technology


Schematic diagram

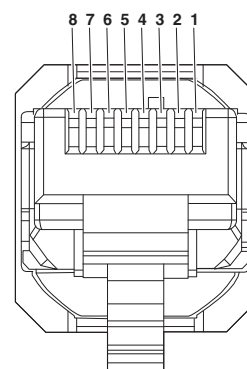

Connector pin assignment plug RJ45

- VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Schematic diagram

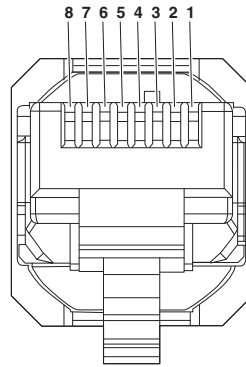

Connector pin assignment plug RJ45