



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VS-BH-M12FSD-RJ45/180

Order No.: 1657494

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1657494>Control cabinet feed-through, M12, 4-pos., D-coded on RJ45 socket,
socket input 180°, IP65/67

Ethernet

Commercial data

EAN	4046356100090
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0372 KG
Catalog page information	Page 197 (PC-2009)

Product notesWEEE/RoHS-compliant since:
10/14/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	4
Color	black
Ambient temperature (operation)	-25 °C ... 85 °C

Material data


Inflammability class acc. to UL 94	V0
Housing material	PA
Contact material	Copper alloy
Degree of protection	IP65/IP67

Electrical characteristics

Number of positions	4
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Rated current	1 A


Diagrams/Drawings

Dimensioned drawing

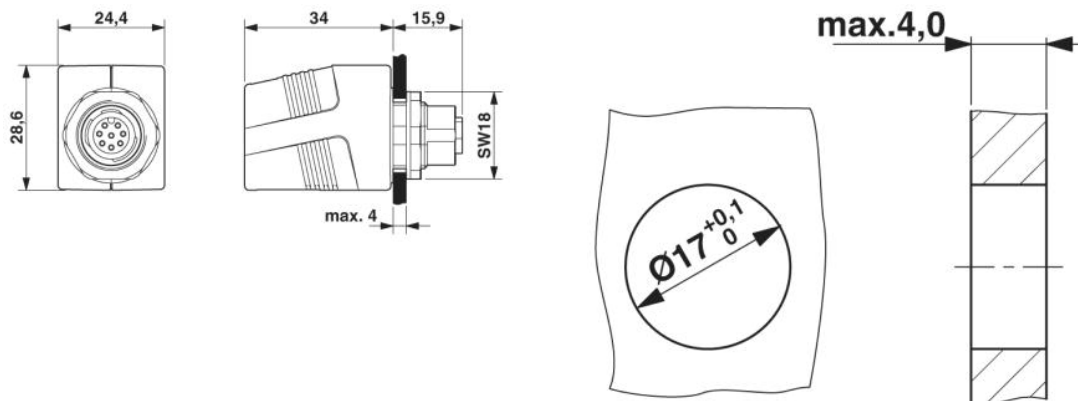

Panel cutout

Circuit diagram

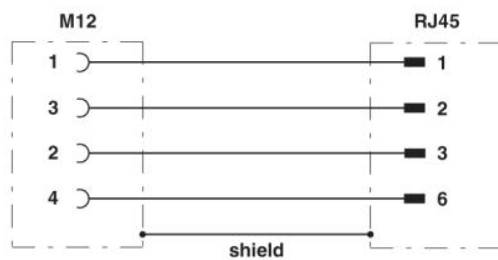

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;