



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




VS-PPC-F1-RJ45-P0BK-1R-PHA

Order No.: 1657847

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1657847>

RJ45 panel mounting frame, IP67, for push-pull interlocking, plastic, for PCB connection, for square panel cutout, with grommet, without mounting screws

**Commercial data**

GTIN (EAN)	 4 046356 131919
sales group	D510
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 195 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 500
Color	black
Ambient temperature (operation)	-40 °C ... 70 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	PA-GF
Material	Plastic
Sealing material	NBR
Seal material	NBR
Degree of protection	IP65/67

Electrical characteristics

Pollution degree	2
------------------	---

Accessories

Item	Designation	Description
------	-------------	-------------


Female insert

1653087	VS-08-BU-RJ45-6/LH-1	RJ45 socket insert, for PCB assembly, CAT6, 8-pos., shielded, with angled solder pins, 1x
1653090	VS-08-BU-RJ45-6/LV-1	RJ45 socket insert, for PCB assembly, CAT6, 8-pos., shielded, with straight solder pins, 1x


Diagrams/Drawings

Drilling plan/solder pad geometry


Drilling diagram

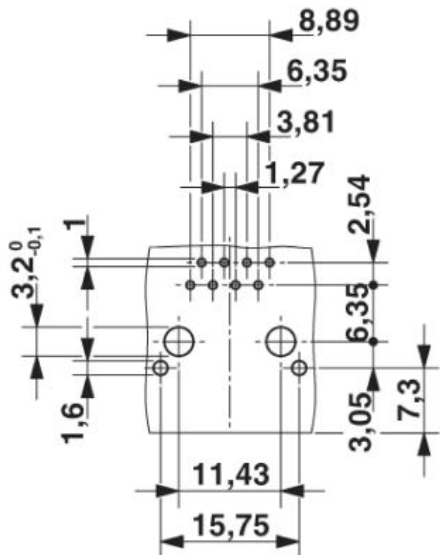

Dimensioned drawing

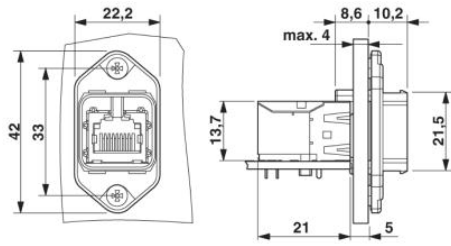

Push-Pull panel mounting frame RJ45

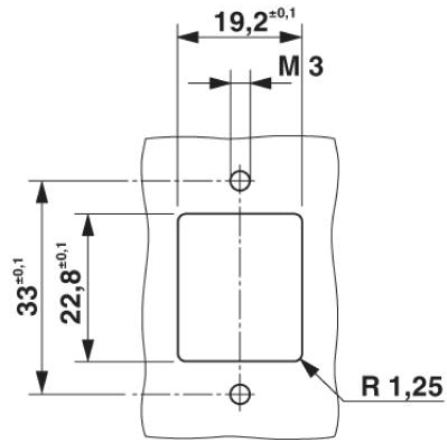

Panel cutout

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;