



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




IEC Connector C21, for very hot conditions 155°C, Rewireable, Angled



Rewireable connector



Example with assembled cable



**Description**

- Cord Connector
- Connector , Pin temperature 155 °C , Protection class I
- Cable diameter 6.5 - 16 mm
- Min. wire size 16AWG / 1.0 mm<sup>2</sup>
- Max. wire size 10AWG / 1.5 mm<sup>2</sup>

**Approvals**

- ENEC File Number: 40039959
- UL File Number: E96454
- CCC File Number: 2014010204701246

**Characteristics**

- Suitable for use in equipment according to IEC/UL 60950

**Weblinks**


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

**Technical Data**

Ratings IEC	16A / 250VAC; 50Hz	appliance inlet/-outlet	C21 acc. to IEC 60320-1, UL 60320-1, CSA C22.2 no. 60320-1 (for very hot conditions) pin-temperature 155 °C, 16A, Protection Class I
Ratings UL/CSA	20A / 250VAC; 60Hz		
Dielectric Strength	> 1.5 kVAC between L-N > 1.5 kVAC between L/N-PE (1 min/50Hz)		
Allowable Operation Temperature	-25 °C to 155 °C		
Insulation cover	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Cable		
Material: Housing	Thermoplastic, black, UL 94V-0		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimensions**

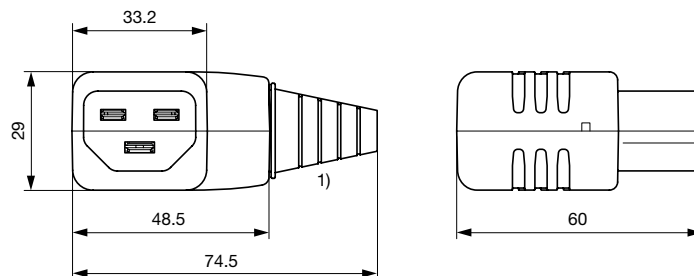

1) Cutting points for 10/12/14/16 mm cable diameter

All Variants

Color	Max. cable diameter	Max. wire size	Order Number
black	16 mm	3 x 1.5 mm <sup>2</sup> / 3 x 10 AWG	1659.0000

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Max. torque for screws: Terminals: 0.8 Nm, Cable clamp: 0.4 Nm, Cover: 0.4 Nm

**Packaging unit** 50 Pcs

Mating Inlets/Plugs

Category / Description



[Appliance Inlet Overview complete](#)

IEC Appliance Inlet C22, for very hot conditions 155°C, Screw-on or Snap-in Mounting, Front Side

1681

[Appliance Inlet further types to 1659](#)



[IEC Inlet Filter Overview complete](#)

C20F, 20 A, prewired, Standard and Medical Version, Solder, quick connect or wires (stranded), Capacitor: X2, Screw, Mounting Front-/Rear-Side, Power Entry Modules with Filter

C22F

[IEC Inlet Filter further types to 1659](#)