



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-B 24-ADP-B 6-GY


Order No.: 1660407

The illustration shows a version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1660407>

HEAVYCON adapter plate, type B24 on B6, for panel cutouts of type B24, gray

Commercial data

GTIN (EAN)	 4 017918 022044
sales group	D031
Pack	10 pcs.
Customs tariff	39269097
Catalog page information	Page 543 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
11/13/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For panel cutouts of type B24, cannot be used for panel mounting bases having a pre-mounted protective cover
Length	150 mm
Hole diameter	4.5 mm
Width	52 mm
Material	PA

Inflammability class acc. to UL 94	HB
Color	light gray
Design	B24
Drill hole distance, horizontal	130 mm
Drill hole distance, vertical	32 mm

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

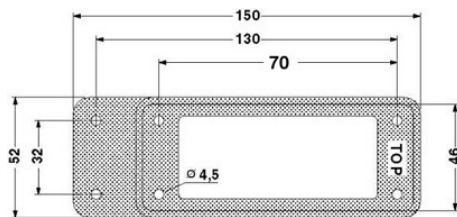

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;