



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-SMP 125-B16-AMQ

Order No.: 1660973


The illustration shows version HC-SMP 125-B 10 with double locking latch



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1660973>

HEAVYCON connector assembly frame with panel mounting base with
double locking latch, for contact inserts of type B16

Commercial data

GTIN (EAN)	 4 017918 022389
sales group	D021
Pack	5 pcs.
Customs tariff	85389099
Catalog page information	Page 539 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
12/01/2005



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts B16, BB32, DD72, HS6 and HV6
Length	125 mm
Height	52 mm
Hole diameter	4.5 mm
Material	PA

Inflammability class acc. to UL 94	HB
Design	B16
Drill hole distance, horizontal	104 mm
Drill hole distance, vertical	32 mm

Certificates / Approvals





Certification

GOST

Diagrams/Drawings

Dimensioned drawing

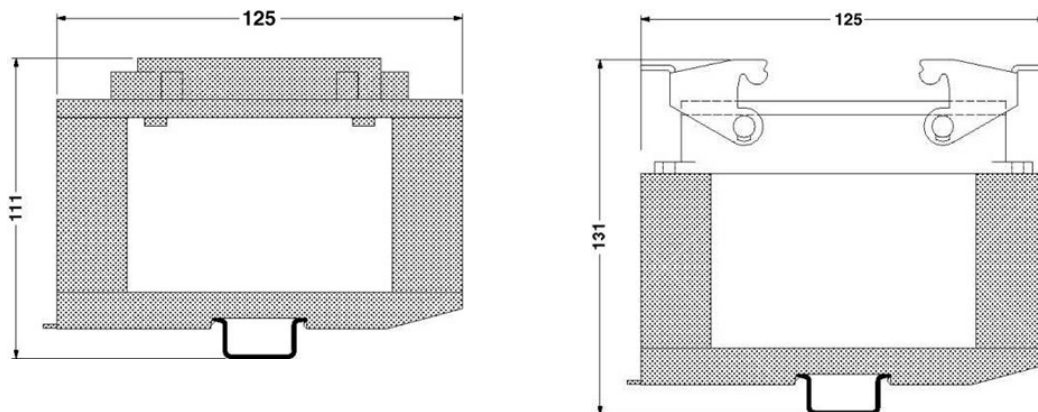

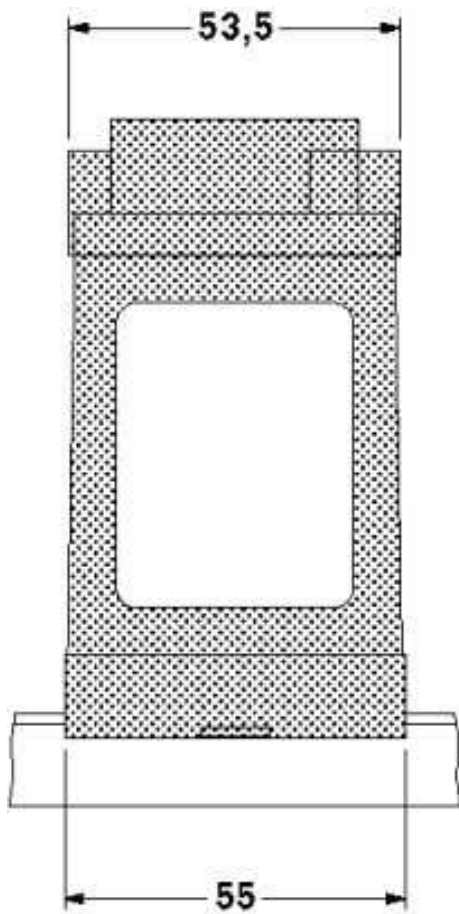

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;