



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# SACC-V-3CON-PG9/B-1L-S

Order No.: 1671153



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1671153>

Valve connector, 3-pos., type B, 1 LED, with protective circuit, screw connection, cable screw connection Pg9

Commercial data	
GTIN (EAN)	4 017918 135003 
sales group	D123
Pack	5 pcs.
Customs tariff	85444290
Catalog page information	Page 111 (PC-2009)

#### Product notes

WEEE/RoHS-compliant since:  
06/20/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	3
Volume resistance	≤ 4 MΩ
Insulation resistance	> 2 GΩ

Ambient temperature (operation)	-25 °C ... 60 °C (valve plug)
<b>General characteristics</b>	
Standards/regulations	Valve connector EN 175301-803
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ag
Valve plug contact insert material	PBT
Material, housing, valve plug	PA
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	13
External cable diameter	6 mm ... 8 mm
Status display	Yellow LED
Protective circuit/component	Z diode

#### Certificates / Approvals




Certification


GOST

**Diagrams/Drawings**

Dimensioned drawing

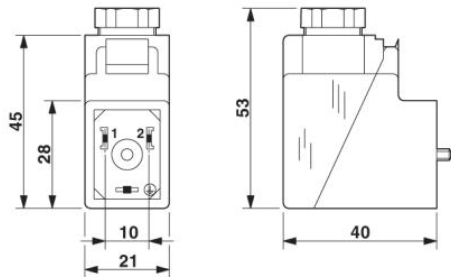

Circuit diagram

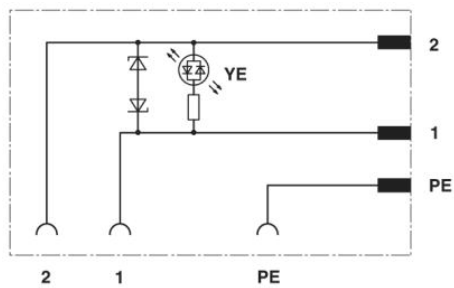

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;