



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




HC-M-PN2-MOD-ST-BU

Order No.: 1674998
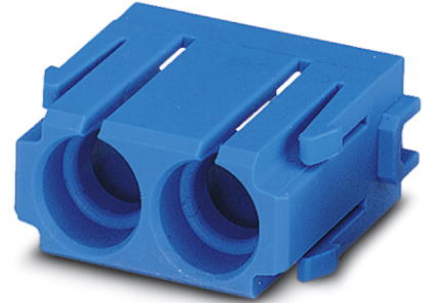
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1674998>

HEAVYCON pneumatic module, male/female, 2 connections

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 146368 |
| sales group | D042 |
| Pack | 2 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 462 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
06/16/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Electrical characteristics**

| | |
|---------------------------------|---|
| Note | Hinged retaining frame HC-M-MHR...is required for HEAVYCON-ADVANCE housing of types B6 to B24 and HEAVYCON housing of types B6 to B48, pneumatic HC-M-PN... male and female connectors (Pneumatic male and female connectors not included in the scope of supply) |
| Ambient temperature (operation) | -40 °C ... 80 °C |
| Number of positions | 2 |

Mechanical characteristics

| | |
|---|-------|
| Internal diameter of pressure hose connection | 6 mm |
| Insertion/withdrawal cycles | ≥ 500 |

General characteristics

| | |
|------------------------------------|---|
| Color | blue |
| Number of module slots | 1 |
| Inflammability class acc. to UL 94 | V0 |
| Assembly instructions | Housing height ≥ 52 mm. Use of HC-CST (1676857) coding pins and HC-CBU (1676860) coding sockets has been prescribed. Observe the min bending radii when connecting the tubes. |

Material data

| | |
|--------------------------|----|
| Contact carrier material | PC |
|--------------------------|----|

Certificates / Approvals




Certification

CSA, GOST, UL

Diagrams/Drawings

Dimensioned drawing

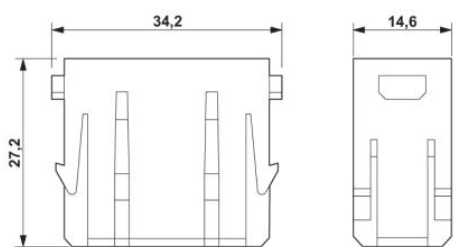

2-pos.

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;