



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



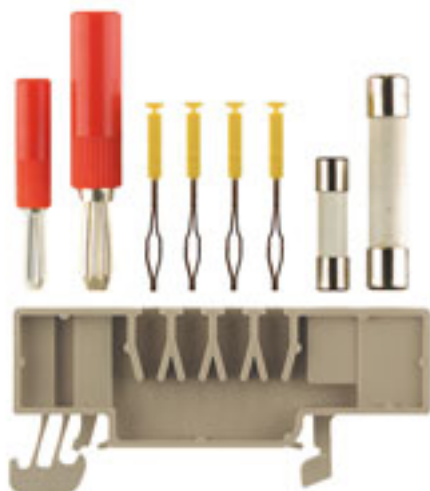

S 2/46 Foto3

**General ordering data**

Order No.	1678680000
Part designation	ZST
Version	Modular terminal, accessories, Accessories holder
EAN	4008190466770
Qty.	10 pc(s).

**Product notes**

Product description	The ZST group carrier is used for temporary "parking" of test plugs, cross-connections and fuses which are used during service work. The group carrier can be snapped on to the end of a terminal strip or to the TS 35 rail.
---------------------	---

**Additional technical data**

Colour of insulating material	dark beige
End plate required	Yes
Installation advice	Direct mounting
Insulating material	Wemid
Product family	Z-series
UL 94 flammability rating of insulation material	V-0

**Conductors for clamping (rated connection)**

Type of connection	Miscellaneous
--------------------	---------------

**Dimensions**

Width	10 mm
Height of lowest version	27.5 mm
Length	61.1 mm

**Approvals**

Approvals institutes	n.ä.
----------------------	------

#### Classifications

eClass 4.1	27-14-11-99
eClass 5.0	27-14-11-45
eClass 5.1	27-14-11-45

#### Similar products

Order No.	Part designation	Version
-----------	------------------	---------