



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




HC-K 4/0-ESTS

Order No.: 1679414
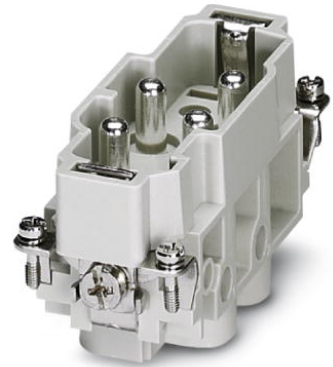
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1679414>

HEAVYCON male insert, K4/0 series, 4-pos., screw connection

Commercial data

GTIN (EAN)	 4 017918 168858
sales group	D007
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 445 (PC-2009)

Product notesWEEE/RoHS-compliant since:
08/08/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Note	For HEAVYCON-ADVANCE housings of B16 type and HEAVYCON housings of B16 and B32 types
Connection method	Screw connection

Tightening torque	3 Nm (4.0 mm ² ... 16 mm ²)
	2 Nm (2.5 mm ²)
	1.2 Nm (1.5 mm ²)
Ambient temperature (operation)	-40 °C ... 125 °C
Pollution degree	3
Surge voltage category	III
Insertion/withdrawal cycles	≥ 500
Design	K4/0
Conductor cross-section	1.5 mm ² ... 16 mm ²
Connection cross-section AWG	16 ... 6
Stripping length of the individual wire	14 mm

Material data

Inflammability class acc. to UL 94	V0
Contact material	Cu alloy
Contact surface material	Ag
Contact carrier material	PC

Electrical characteristics

Rated voltage (III/3)	830 V
Rated surge voltage	8 kV
Rated current	80 A (power contacts)

Certificates / Approvals




Certification


CSA, GOST, UL

Diagrams/Drawings

Diagram

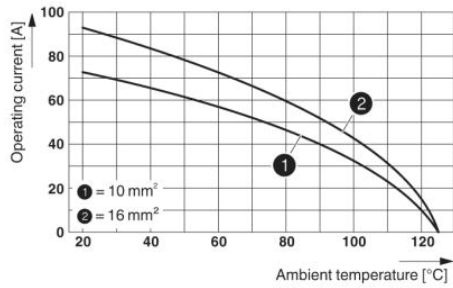


Dimensioned drawing

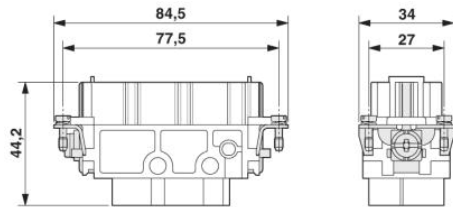

Male insert

Schematic diagram

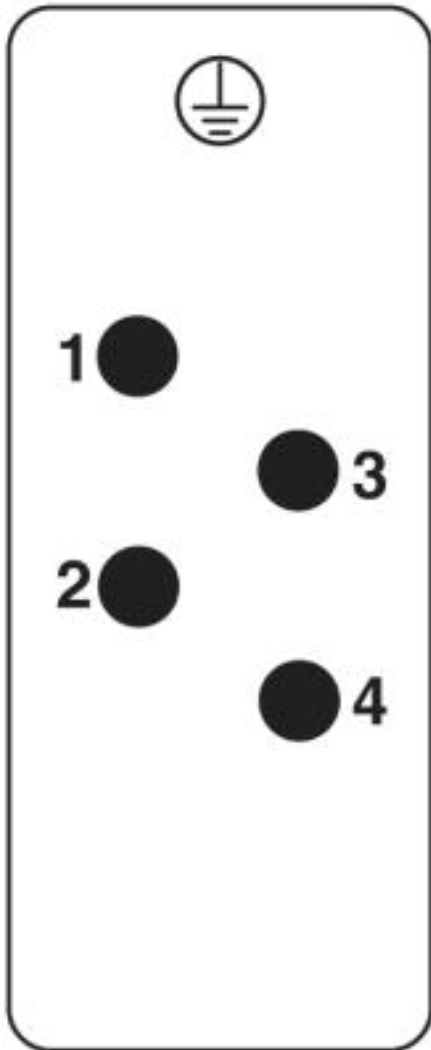

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;