



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



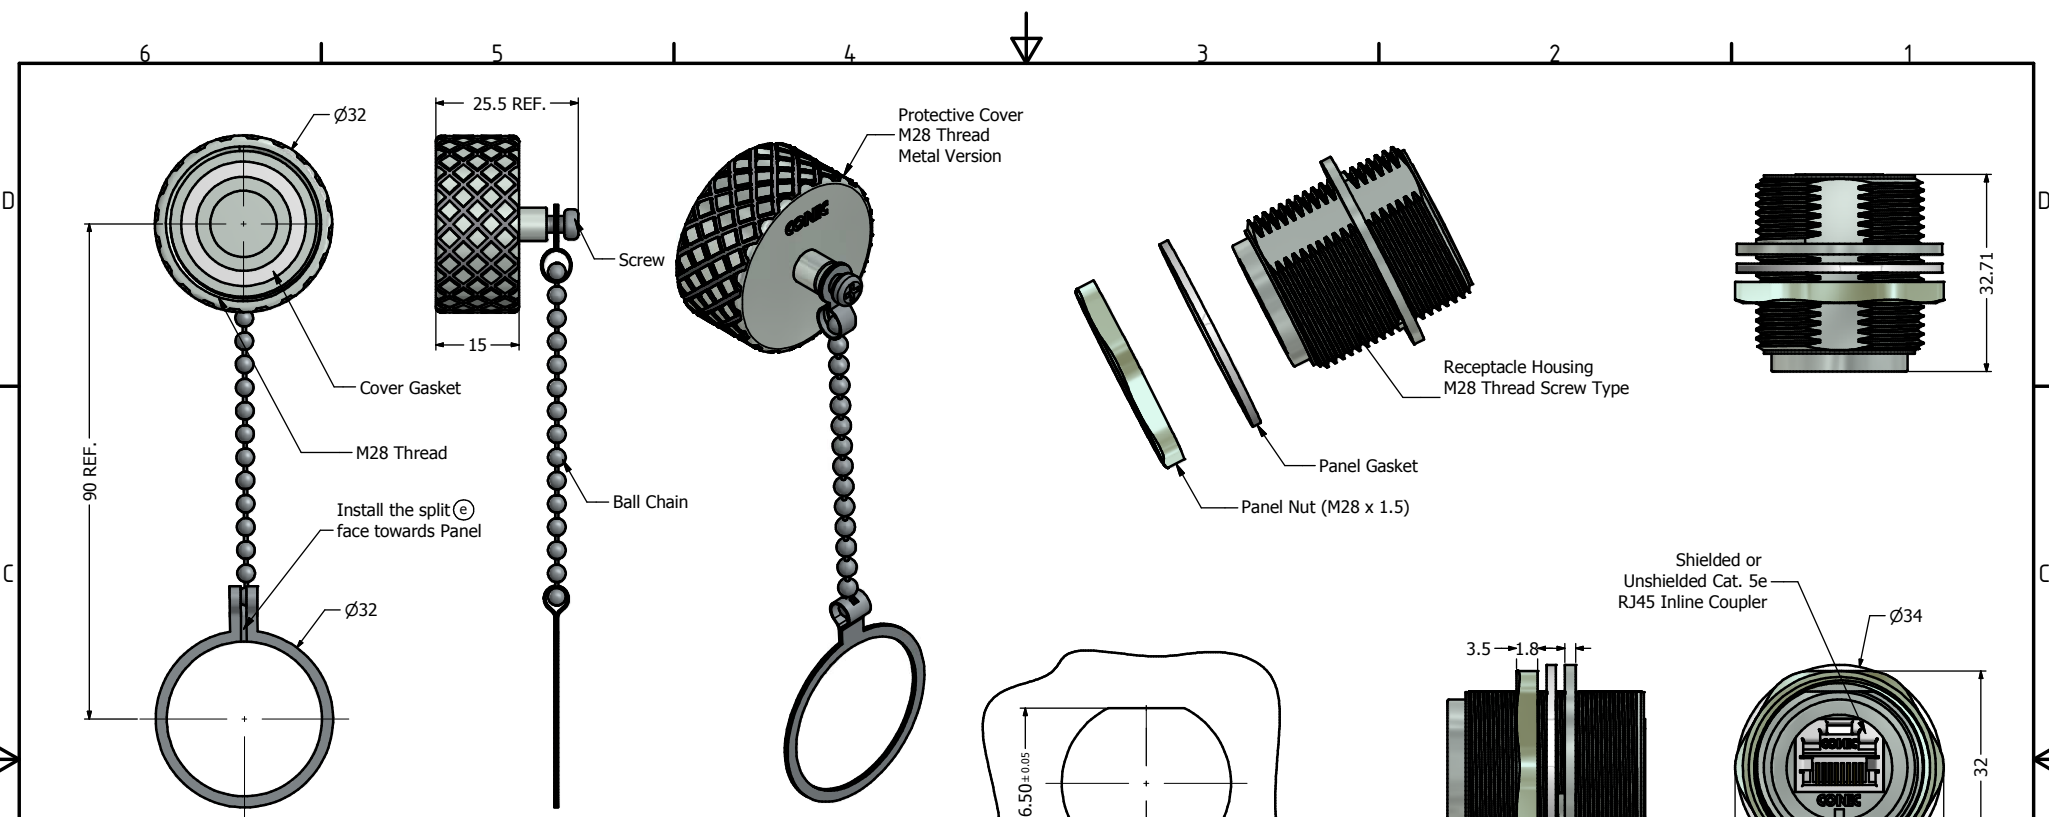

Notes:

1. Electrical Specifications:
 - Meets EIA/TIA-568-B.2 Cat.5e Specification
 - Contact Resistance: 20mOhm max.
 - Insulation Resistance: 500MOhm min. @ 100 VDC
 - Current Rating: 1.2A max. at 25° C
 - Working Voltage: 100 VDC
 - DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
 - Operating Temperature: -40° C to +85° C
2. Material and Finish:
 - Ⓓ - Receptacle Housing, Zinc Die-Cast, Nickel Plated
 - Cover, Panel Nut: Brass, Nickel Plated
 - Ball Chain: Copper Alloy, Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Ⓒ - Cover Gasket: Silicon, Color: White
 - RJ45 Jack Metal Shell: Copper Alloy, Nickel Plated
 - RJ45 Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
 - RJ45 Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel
3. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
4. IP67 rated when fully mated with appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Metal Version Receptacle with Shielded RJ45 Inline Coupler + Cover Assembly	17-101604
Metal Version Receptacle with Unshielded RJ45 Inline Coupler + Cover Assembly	17-101614

THE DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1:2:1	Dim. in mm								
	Name	Title	Approval Date	0 PLC ±0.50	1 PLC ±0.38		Autodesk Inventor	Material: See Notes								
				2 PLC ±0.25	3 PLC ±0.10	<table border="1"> <tr> <td>2009</td> <td>Date</td> <td>Name</td> </tr> <tr> <td>Draw.</td> <td>Jun. 05</td> <td>Vincent Ke</td> </tr> <tr> <td>Appd.</td> <td>Jun. 05</td> <td>J. Chaudry</td> </tr> </table>	2009		Date	Name	Draw.	Jun. 05	Vincent Ke	Appd.	Jun. 05	J. Chaudry
	2009	Date	Name													
	Draw.	Jun. 05	Vincent Ke													
Appd.	Jun. 05	J. Chaudry														
e	1 x e	Feb/06/2014	Vincent Ke	Norm	Drawing No.: 17K1A249	DIN A3										
d	1 x d	Jan/12/2012	Vincent Ke	D-old		Part No.: SEE P/N TABLE	Sheet 1/1									
c	1 x c	Jul/12/2011	Vincent ke													
b	2 x b	Mar/08/2011	Vincent ke													
a	original															
Rev.	Changes	Date	Name	CONEC												