



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 17 Series

RoHS  
Compliant


NYLON 6.6

GENERAL PURPOSE


MATERIAL OPERATING TEMPERATURE: -40°C to +85°C

APPLICATION OPERATING TEMPERATURE: -10°C to +85°C

APPROVALS<sup>1</sup>: c(UL)us

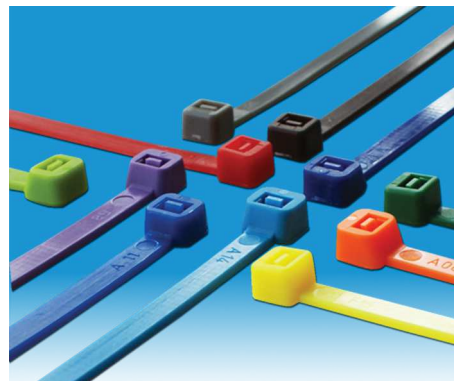

Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]
<b>M - 18lb</b>				
17-M80	2.5 [.098]	80 [3.2]	14.0 [0.55]	8 [18]
17-M100	2.5 [.098]	100 [4.0]	20.5 [0.80]	8 [18]
17-M120	2.5 [.098]	120 [4.7]	27.0 [1.06]	8 [18]
17-M130	2.5 [.098]	130 [5.0]	30.0 [1.18]	8 [18]
17-M150	2.5 [.098]	150 [6.0]	36.5 [1.43]	8 [18]
17-M160	2.5 [.098]	160 [6.3]	39.8 [1.56]	8 [18]
17-M200	2.5 [.098]	200 [8.0]	52.5 [2.06]	8 [18]
17-M260	2.5 [.098]	260 [10.2]	71.6 [2.81]	8 [18]
<b>I - 40lb</b>				
17-I140	3.6 [.14]	140 [5.5]	33.0 [1.30]	18 [40]
17-I150	3.6 [.14]	150 [6.0]	36.0 [1.41]	18 [40]
17-I180	3.6 [.14]	180 [7.0]	46.0 [1.81]	18 [40]
17-I200	3.6 [.14]	200 [8.0]	52.5 [2.06]	18 [40]
17-I250	3.6 [.14]	250 [10.0]	68.0 [2.67]	18 [40]
17-I280	3.6 [.14]	280 [11.0]	78.0 [3.07]	18 [40]
17-I300	3.6 [.14]	300 [11.8]	84.0 [3.30]	18 [40]
17-I370	3.6 [.14]	370 [14.5]	106.0 [4.17]	18 [40]
<b>S - 50lb</b>				
17-S120	4.6 [.181]	120 [4.7]	23.8 [0.93]	22 [50]
17-S160	4.6 [.181]	160 [6.3]	36.6 [1.32]	22 [50]
17-S180	4.8 [.189]	180 [7.0]	43.0 [1.68]	22 [50]
17-S190	4.8 [.189]	190 [7.5]	46.0 [1.81]	22 [50]
17-S200	4.8 [.189]	200 [8.0]	49.5 [1.94]	22 [50]
17-S250	4.8 [.189]	250 [10.0]	65.0 [2.55]	22 [50]
17-S280	4.8 [.189]	280 [11.0]	74.8 [2.94]	22 [50]
17-S300	4.8 [.189]	300 [11.8]	81.0 [3.18]	22 [50]
17-S350	4.8 [.189]	350 [13.7]	97.0 [3.81]	22 [50]
17-S360	4.8 [.189]	360 [14.0]	100.0 [3.93]	22 [50]
17-S370	4.8 [.189]	370 [14.5]	103.5 [4.07]	22 [50]
17-S380	4.8 [.189]	380 [15.0]	106.7 [4.20]	22 [50]
17-S390	4.8 [.189]	390 [15.3]	110.0 [4.33]	22 [50]
17-S400	4.8 [.189]	400 [15.7]	113.1 [4.45]	22 [50]
17-S430	4.8 [.189]	430 [17.0]	122.5 [4.82]	22 [50]
17-S450	4.8 [.189]	450 [17.7]	129.0 [5.07]	22 [50]
17-S500	4.8 [.189]	500 [19.7]	145.0 [5.70]	22 [50]
17-S550	4.8 [.189]	550 [21.6]	160.9 [6.33]	22 [50]
<b>HD - 120lb</b>				
17-HD150	7.6 [.300]	150 [6.0]	35.0 [1.37]	55 [120]
17-HD200	7.6 [.300]	200 [8.0]	50.9 [2.00]	55 [120]
17-HD220	7.6 [.300]	220 [8.6]	57.2 [2.25]	55 [120]
17-HD250	7.6 [.300]	250 [10.0]	66.8 [2.62]	55 [120]
17-HD300	7.6 [.300]	300 [11.8]	82.8 [3.25]	55 [120]
17-HD350	7.6 [.300]	350 [13.7]	98.5 [3.87]	55 [120]
17-HD365	7.6 [.300]	365 [14.0]	103.5 [4.07]	55 [120]
17-HD380	7.6 [.300]	380 [15.0]	108.0 [4.25]	55 [120]
17-HD400	7.6 [.300]	400 [15.7]	114.5 [4.50]	55 [120]
17-HD450	7.6 [.300]	450 [17.0]	130.5 [5.13]	55 [120]
17-HD540	7.6 [.300]	540 [21.0]	159.0 [6.25]	55 [120]
17-HD550	7.6 [.300]	550 [21.6]	162.5 [6.39]	55 [120]
17-HD750	7.6 [.300]	750 [29.5]	226.1 [8.90]	55 [120]

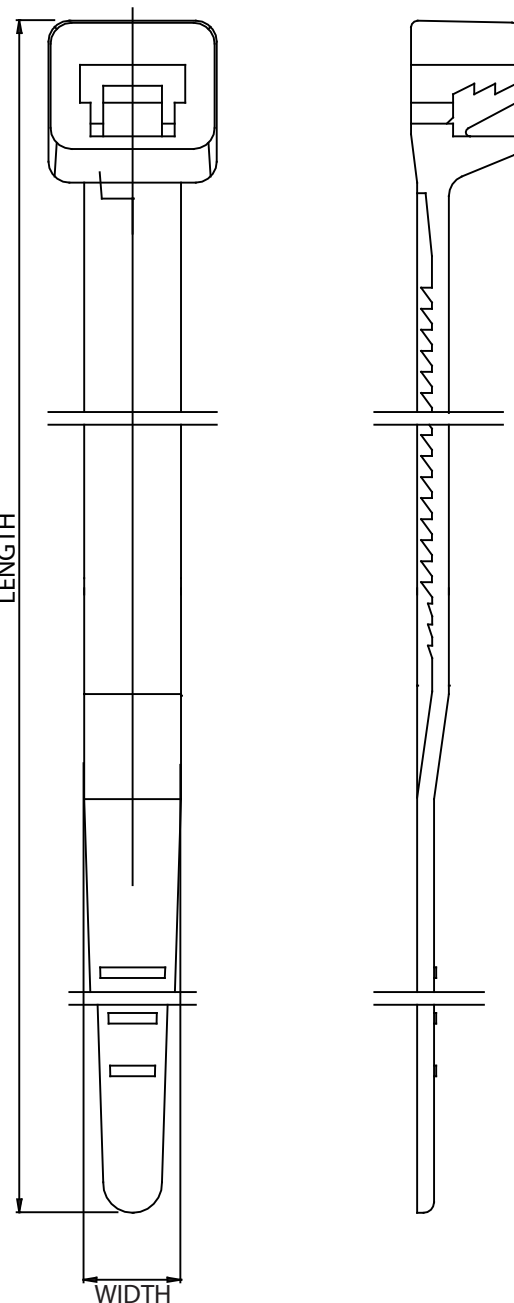

Notes:  
 1. 17-EHD750, 17-M260HSN, 17-M260HSB, 17-S550HSN, 17-S550HSB, 17-HD750HSN, 17-HD750HSB, 17-M260HT, 17-S550HT, 17-HD750HT, 17-EHD400HT, 17-EHD450HT, 17-EHD500HT, 17-EHD550HT, 17-EHD610HT, 17-EHD760HT, 17-EHD780HT, 17-EHD810HT, 17-EHD920HT, 17-EHD1220HT, 17-EHD750UVB, are not UL approved  
 Material/Color LT and V0 are not UL approved

# 17 Series

RoHS Compliant


NYLON 6.6

GENERAL PURPOSE

MATERIAL OPERATING TEMPERATURE: -40°C to +85°C

APPLICATION OPERATING TEMPERATURE: -10°C to +85°C


APPROVALS<sup>1</sup>: 

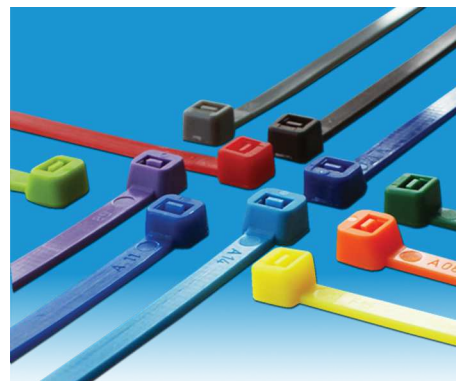

Part Number	Width mm [Inch]	Length mm [Inch]	Max Bundle Diameter mm [Inch]	Min Loop Tensile Kg [lb]
<b>EHD - 175lb</b>				
17-EHD400	8.8 [.345]	400 [15.7]	115.0 [4.52]	80 [175]
17-EHD450	8.8 [.345]	450 [18.0]	130.5 [5.13]	80 [175]
17-EHD500	8.8 [.345]	500 [19.7]	146.5 [5.76]	80 [175]
17-EHD550	8.8 [.345]	550 [21.6]	163.5 [6.43]	80 [175]
17-EHD610	8.8 [.345]	610 [24.0]	181.5 [7.14]	80 [175]
17-EHD750	8.8 [.345]	750 [29.5]	226.5 [9.91]	80 [175]
17-EHD760	8.8 [.345]	760 [30.0]	229.5 [9.03]	80 [175]
17-EHD780	8.8 [.345]	780 [30.5]	235.5 [9.27]	80 [175]
17-EHD810	9.0 [.350]	810 [32.0]	245.0 [9.64]	80 [175]
17-EHD920	9.0 [.350]	920 [36.0]	280.0 [11.0]	80 [175]
17-EHD1220	9.0 [.350]	1220 [48.0]	375.5 [14.7]	80 [175]
<b>HSD - 250lb</b>				
17-HSD530	12.4 [.490]	530 [21.0]	156.0 [5.90]	110 [250]
17-HSD650	12.4 [.490]	650 [25.5]	195.0 [7.60]	110 [250]
17-HSD1000	12.4 [.490]	1000 [40.0]	305.0 [12.0]	110 [250]
17-HSD1030	12.4 [.490]	1030 [40.5]	315.0 [12.4]	110 [250]

Notes:  
 1. 17-EHD750, 17-M260HSN, 17-M260HSB, 17-S550HSN, 17-S550HSB, 17-HD750HSN, 17-HD750HSB, 17-M260HT, 17-S550HT, 17-HD750HT, 17-EHD400HT, 17-EHD450HT, 17-EHD500HT, 17-EHD550HT, 17-EHD610HT, 17-EHD760HT, 17-EHD780HT, 17-EHD810HT, 17-EHD920HT, 17-EHD1220HT, 17-EHD750UVB, are not UL approved  
 Material/Color LT and V0 are not UL approved

## PART NUMBER SYSTEM



**SERIES**

**CROSS SECTION**

**LENGTH**

**MATERIAL/COLOR**

N: Natural	Y: Yellow
WH: White	R: Red
B: Normal UV Black	P: Purple
UVB: Weather Resistant Black	BR: Brown
HSB: Heat Stabilized Black	GR: Gray
HSN: Heat Stabilized Natural	O: Orange
HT: High Heat Resistant Natural	FG: Fluorescent Green
LT: Low Temperature Resistant Natural	FL: Fluorescent Yellow
V0: Flame Retardant Natural	FB: Fluorescent Blue
G: Green	FO: Fluorescent Orange
BL: Blue	S: Silver

**PACKAGE SIZE**

L: 50PCS
C: 100PCS
D: 500PCS
M: 1000PCS
Number: Other Quantity

