



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UBC-200

NXP ARM® Cortex®-A9 i.MX6 RISC Compact Box Computer



Features

- NXP ARM® Cortex®-A9 i.MX6 dual/quad-core 1 GHz processor
- Onboard DDR3 1GB/2GB, 1066MHz
- 4 GB of eMMC Flash onboard
- HDMI with 1920 x 1080 resolution
- 1 USB 2.0 slot, 1 10/100/1000 Mbps Ethernet slot, and 1 SD slot
- Metal chassis for rugged application
- Low power consumption, fanless design
- Supports wall mounting and DIN rails



Introduction


UBC-200 is an IP-based RISC compact box developed for industrial and IoT applications. Equipped with a powerful NXP ARM® Cortex®-A9 i.MX6 dual/quad-core processor, UBC-200 delivers excellent CPU performance and reduced power consumption. In addition to supporting USB 2.0, HDMI (up to 1080p resolution), and Gigabit Ethernet, the system features 1 x mini PCIe slot for integrating Wi-Fi/3G modules and 1 x built-in SD card slot for storage expansion. The wall mount brackets included with the UBC-200 system enable flexible installation.

Specifications

Form Factor		2.5" Box computer
Processor System	CPU	NXP ARM® Cortex®-A9 i.MX6 dual/quad-core 1.0 GHz processor
Memory	Technology	DDR3 1066 MHz
	Capacity	1 GB of onboard DDR3, supports up to 2 GB
	Flash	4 GB of eMMC Flash for OS and 4 MB of NOR Flash for Advantech's boot loader
Graphics	HDMI	1
	Graphics Engine	2 x IPUs, OpenGL ES 2.0 for 3D, BitBlit for 2D and OpenVG 1.1
	H/W Video Codec	Decoder: MPEG-4 ASP, H.264 HP, H.263, MPEG-2 MP, MJPEG BP Encoder: MPEG-4 SP, H.264 BP, H.263, MJPEG BP
Ethernet	Chipset	NXP i.MX6 integrated RGMII
	Speed	1 10/100/1000 Mbps
RTC	RTC	Yes
Watchdog Timer	Watchdog Timer	Yes
I/O	USB	1 x USB 2.0
	SDIO	1 x SD slot
	Button	1 x Reset button
Indicator	LED	1 x Green LED for system power
Expansion	Mini PCIe	1
	SD Socket	1
	SIM	1
Power	Power Supply Voltage	9 – 24 V _{DC}
	Power Type	2-pole lockable DC-in
	Power Consumption	3.16 Watts (max. load)
Environment	Operating Temperature	0 – 60 °C
	Operating Humidity	5 – 95% relative humidity, non-condensing
Mechanical	Dimensions (W x D)	111 x 77 x 30 mm
	Mounting	Wall mount, DIN rail
	Weight	312 g
Operating System	Linux	V3.0.35
	Android	V4.3
Certifications		CE/FCC Class B

Dimensions

Unit: mm

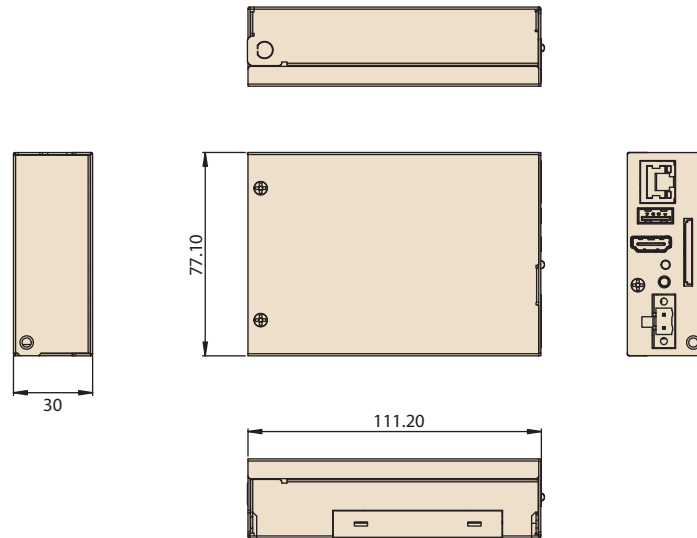

Ordering Information

Part Number	CPU	Memory	Flash Memory	UART	LAN	USB Host	HDMI	Size	Operating Temperature
UBC-200CD-MDA1E	NXP i.MX6 dual-core, 1 GHz	1 GB	4 GB	-	1	1	1	111 x 77 x 30 mm	0 ~ 60 °C
UBC-200CQ-MEA1E	NXP i.MX6 quad-core, 1 GHz	2 GB	4 GB	-	1	1	1	111 x 77 x 30 mm	0 ~ 60 °C

Packing List

Part Number	Description
1960062939N001	Wall-mount bracket

Optional Accessories

Part Number	Description
96PSA-A36W12R1	Adapter 100-240 V 36 W 12 V 3A
1700017968	DC-jack/plug-in cable
1960015198T011	DIN-rail for UBC-200
SQF-ISDS1-2G-86E	SQFlash SD card SLC 2G, 1CH (-40 ~ 85 °C)
EWM-W142F01E	802.11 b/g/n, AR9287, 2T2R, full-size mini PCIe
1750007050-01	Wi-Fi RP-SMA short SMA jack (9.5 mm) to U.FL, 100 mm (Wi-Fi cable)
1750000318	EMI antenna 2DBI 2.4 GHz SMA CONN for ARK-3384 (Wi-Fi antenna)
EWM-C106FT01E	Cellular, HSUPA/WCDMA/GPRS, full-size mini PCIe
1750007156-01	Cellular/GPS SMA short jack (9.5 mm) 100 mm (3G cable)
1750005865	Antenna, 10.9 cm, 50 ohm, AN8921F-5701SM (3G antenna)
1700001524	Power cord 3P UL 10A 125 V 180 cm
170203183C	Power cord 3P Europe (WS-010+WS-083) 183 cm
170203180A	Power cord 3P UK 2.5A/3A 250 V 1.83 M
1700008921	Power Cord 3P PSE 183cm

External I/O

