



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UTX-3115

Intel® Atom™ E3826/E3815 with Dual Giga LAN Fanless Compact Box PC

NEW



Features

- ① Intel® Atom™ Dual Core E3826 1.46 GHz processor
- ① Palm-size form factor: 138.5(W) x 35.98(H) x 116.4(D) mm
- ① Supports 1 x COM port, 1 x HDMI, 1 x micro HDMI, 1 x VGA, 1 x USB3.0 and 2 x USB2.0 ports, TPM on board
- ① Built-in 1 x Half size Mini PCIe expansion slot (i.e.: Wi-Fi module) and 1 x Full size Mini PCIe expansion slot (i.e.: mSATA or 3G/4G module)
- ① Supports 1 2.5" HDD or SSD storage
- ① Wide operating temperature -20 ~ 60° C support
- ① Optional VESA / DIN-Rail / Wall mounts



SUSIAccess
Remote Device Management



PTCRB



CE FCC



Specifications


		UTX-3115
Processor System	CPU	Intel Atom Dual Core E3826 1.46GHz Single Core E3815 1.46GHz
	L2 Cache	1MB
	BIOS	AMI EFI 16 Mbit
Memory	Technology	DDR3L 1333/1066MHz, up to 8GB
	Socket	One x 204-pin SO-DIMM (Two 204pin SO-DIMM by BOM option)
Graphics	Chipset	Intel Atom E3826/E3815
	Interface	VGA: 1, max resolution: 2560 x 1600 @ 60Hz HDMI: 1, max resolution: 1920 x 1080P @ 60Hz Micro HDMI: 1, max resolution: 1920 x 1080P @ 60Hz
Ethernet	LAN	Support Dual 10/100/1000Mbps LAN LAN1: Intel I210AT LAN2: Realtek RTL8111G
I/O Interface	Serial Ports (Available for WIN7 & IDP)	1 x RS-232 (Tx/Rx only) with 5v/12v or 1x RS-422(4 wires full duplex)/RS-485 (2wires half duplex) by BOM option
	USB Interface	1 USB3.0 port, 1 USB2.0 port and 1 micro USB2.0 port
	SATA	1 SATA interface, support HDD or SSD
	TPM	Infineon SLB9635 chip onboard. Support TPM1.2
Expansion	Mini PCIe	1 x Half-Size Mini PCIe support WIFI or 3G module 1 x Full-Size Mini PCIe support mSATA or 3G/LTE/WiFi module SIM holder default on Full Size Mini PCIe, can change to Half Size Mini PCIe by BOM option
	Storage	2.5" HDD/SSD mSATA
Software Support	Microsoft Windows	Windows 7, Windows 8.1, Windows 10, WES7, WES8, and WindRiver IDP2.0/3.1 OS
	Power Requirement	Power Input Voltage Power Adaptor
Power Consumption	Typical	12 V @ 0.49 A
	Max	12 V @ 0.88 A
	Power Type	AT/ATX by BOM option
Mechanical	Construction	Aluminum
	Mounting	Support VESA/DIN Rail/Wall mounting (Optional)
	Dimensions (W x H x D)	138.5 x 35.98 x 116.4 mm (5.5" x 1.4" x 4.6")
Environmental and Certifications	Operating Temperature	-20 ~ 60° C: With extended temperature SSD/Memory/EWM-C118H 3G MODULE / EWM-W158F WIFI module (w/o RF certification) -20 ~ 45° C: With extended temperature SSD/Memory and Intel AC7260 WIFI module/Telite HE910G module (w/ RF certification)
	Storage Temperature	-40 ~ 60° C
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD: 3Grms, 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock During Operation	With SSD: 10G, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class B (RF), PTCRB, GCF with Intel AC7260 WIFI Card and Telite HE910G 3G module) CE/FCC Class B (w/o RF) with UTX-3115 Bare bone only
	Safety Certifications	CB, UL, CCC, BSMI, KCC

All products specifications are subject to change without notice


Last updated : 26-Jul-2016

Dimensions


Unit: mm

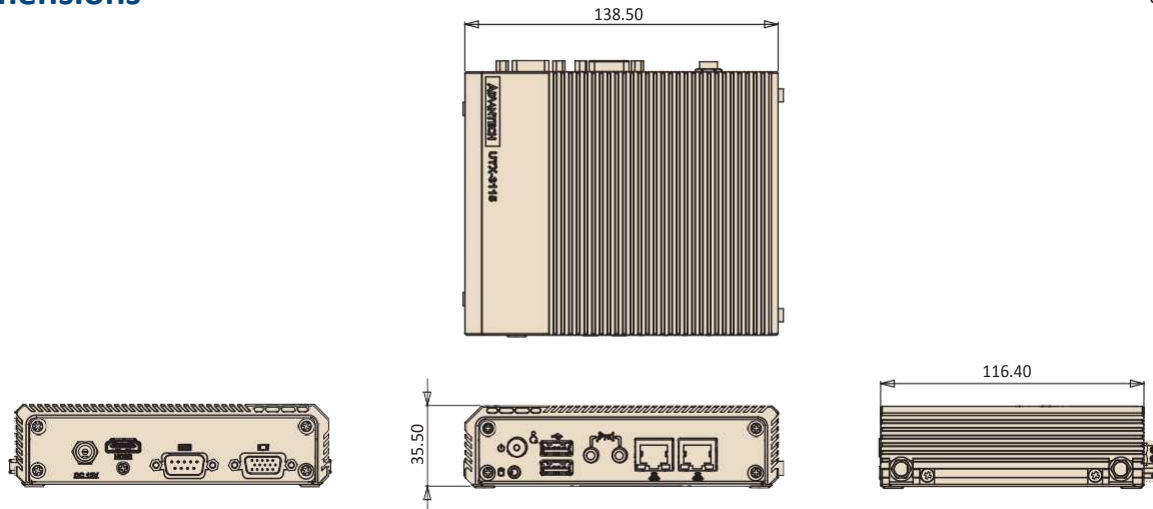

Front Panel External I/O Mechanical Layout/Drawing

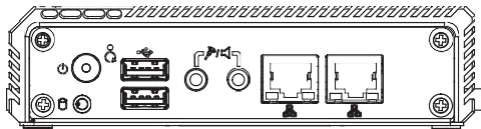

Rear Panel External I/O Mechanical Layout/Drawing

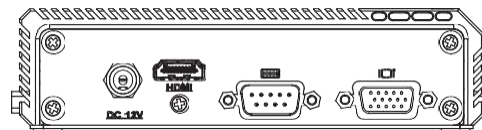

Ordering Information

P/N	Description	CPU	CRT/HDM I/ uHDMI	G.LAN	COM	SATAII	USB3.0/2.0	Antenna	Antenna Post	OS
UTX-3115B-S6A2E	Barebone	E3826	1/1/1	2	1	1	1/2	0	2 +2*	NA
UTX-3115SA4-S6A2E	System w/4antenna, 2G RAM & 32G SSD	E3826	1/1/1	2	1	1	1/2	4	2 +2*	NA
UTX-3115SA4L-S6A2E	System w/4antenna, 2G RAM & 32G SSD	E3815	1/1/1	2	1	1	1/2	4	2 +2*	NA
UTX-3115FS-S6A2E	Emb.sys.UTX-3115.2G RAM.SSD.AC7260 module. HE910G module.4Antenna.	E3826	1/1/1	2	1	1	1/2	4	2+2*	IDP2.0
UTX3115SA4P1-S6A2E	System w/4antenna, 2G RAM& 32G SSD, IDP3.1	E3826	1/1/1	2	1	1	1/2	4	2+2*	IDP3.1 Pro
UTX-3115SA4W-S6A2E	System w/4antenna, 2G RAM & 32G SSD Win10	E3826	1/1/1	2	1	1	1/2	4	2+2*	Win 10 64bit

Note: *Twoantenna postfor Wifimodule & two postfor 3G/LTE

Packing List

Part Number	Description
UTX-3115	1 x UTX-3115 unit
96PSA-A36W12W7	36W 12V 3A AC/DC Power Adaptor
1930000198	2x Screw M2x4L for miniPCIE module use

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type (For power adapter)
170203183C	Power Cable 3-pin 180cm, Europe type (For power adapter)
170203180A	Power Cable 3-pin 180cm, UK type (For power adapter)
1700008921	Power Cable 3-pin PSE Mark 183cm (For power adapter)
1702002600-01	Power cable 3-pin 183 cm, USA type (For power adapter)
1700018705	Power cable 3-pin 183 cm, Europe type (For power adapter)
1700018704	Power cable 3-pin 183 cm, UK type (For power adapter)
1700000237-01	Power cable 3-pin 183 cm, PSE type (For power adapter)
AIMB-0BRK-VM01E	UTX-3115 Vesa Mount bracket kit
AIMB-0BRK-WM01E	UTX-3115 Wallmount bracket kit
AIMB-0BRK-DR01E	UTX-3115 DIN rail bracket kit
EWM-C118HD01E	2-band Cellular Module, SIM holder, half-size
EWM-W158F01E	Advantech 802.11abgn 2T2R, Wide-Temp Module