



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-T1000 series

Mini Embedded Chassis for Low Profile mini-ITX AIMB

NEW



Features

- Economical Embedded chassis for low profile Mini-ITX MB
- Mini design with 43mm in height
- Easy opening design, quick installation for additional peripherals
- Reserved USB, COM, Audio and WLAN antenna openings on front/rear side
- Shock-resistant 2.5" driver bay
- Locking type DC power jack

CE FCC 

Specifications

		AIMB-T1000
Drive Bay	2.5" HDD/SDD	1
Cooling	Fan	1 (40 x 40 x 28 mm/23.8CFM each, Support CPU up to 47W)
Reserved opening	USB port	6
	Serial port	5
	Audio port	1
	WLAN Antenna	4
Miscellaneous	LED Indicators	2 (Power, HDD)
	Reset Button	1
	Power Switch	1
Environment	Operating Temperature	0 ~ 40° C (32 ~ 104° F)
	Non-operating Temperature	-20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms (2.5" HDD)
Physical Characteristics	Dimensions (W x H x D)	250 x 43 x 210 mm (9.84" x 1.69" x 8.27")
	Weight	2.12 Kg


Front View



Rear View




Inside View

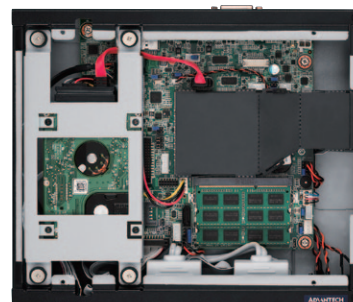

Dimensions

Unit: mm [inch]

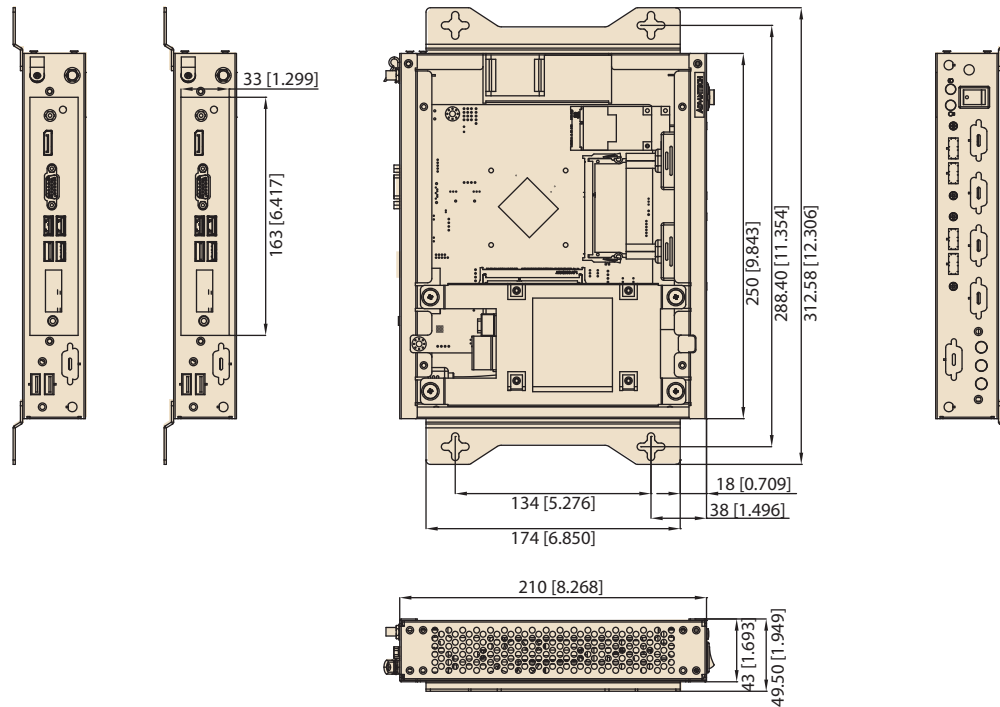

Ordering Information

Parts Number	Description	Supported MB	Front Panel			Rear Panel			Regulations
			USB 2.0/3.0	COM	Audio Jack	MB IO	USB 2.0/3.0	COM/VGA	
AIMB-T1000A-00Y1E	AIMB-T1000A chassis without power adaptor	AIMB-215/225	(4)	(5)	(2)	(MB Specific)	(2)	(1)	CE, FCC

Packing List

Description	Quantity
Startup manual	1
Warranty Card	1
SATA Data+Power Cable	1
Power cable clamp	1
Rubber Feet Pad	4
Screw (Rear IO Bracket, HDD)	6
Screw (MB)	4
Reserved Screw	2

Optional Accessories

Part Number	Description
AIMB-0BRK-WM02E	Wall Mounting Bracket
AIMB-0BRK-VM03E	VESA Mounting Bracket
AIMB-0BRK-DR02E	Din Rail Mounting Bracket
1700022989-01	2 ports USB cable for front panel, 345mm
1700022991-01	2 ports USB cable for rear panel, 100mm
1700022988-01	4 ports COM Cable for front panel, 130+170+210+250mm
1700022990-01	1 prot COM Cable for rear panel, 150mm
1700022992-01	2 ports Audio Cable for front panel, 200mm
AIMB-0ACS-2151E	Accessories Kit for AIMB-215 (Rear IO bracket)
AIMB-0ACS-2251E	Accessories Kit for AIMB-225G2-01A1E (Rear IO bracket, Heatsink)
AIMB-0ACS-2250E	Accessories Kit for AIMB-225G2-00A1E (Rear IO bracket, Heatsink, air duct)