



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PCI-7032

Intel® Celeron J1900/N2930 PCI Half-size SBC with DDR3L 1333/Dual GbE/m-SATA/4 RS-232/422/485

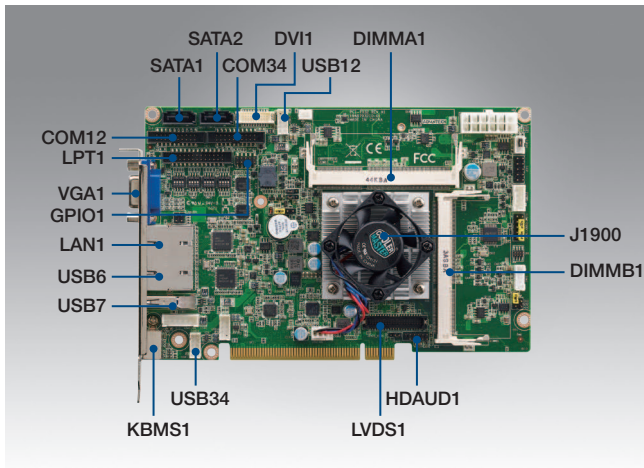

Features

- Ultra low power Intel® Celeron processor J1900/N2930, VG SKU is fan-less design
- Dual channel DDR3L 1066/1333 on 204-pin SO-DIMM socket
- Dual independent display
- Up to 2 GbE LAN
- 2 SATA 2.0 (300 MB/s), one of them can be configured as m-SATA
- Legacy I/O: 4 RS-232/422/485, and 1 LPT support


Software APIs:



Specifications

Processor System	CPU	Intel Celeron N2930	Intel Celeron J1900
	Speed	1.83 GHz	2.0 GHz
	L2 Cache	2 MB	2 MB
	BIOS	AMI 64Mb SPI Flash	
Bus	PCI-Express	PCIe x 1 (F SKU only)	
	PCI	Four 32 bit/33 MHz PCI Masters to Backplane	
Memory	Technology	G2: Dual channel DDR3L-1333 VG: DDR3L-1333 F: Dual channel DDR3L-1333	
	Max. Cap.	8 GB (4GB per DIMM)	
	Socket	DDR3 204-pin SO-DIMM x1 (VG); x2 (G2, F)	
Graphics	Onboard	Chipsset integrated Intel® HD Graphics	
	VRAM	Shared system memory. It subjects to the OS.	
	Video Interface	Dual independent display: choosing two interfaces from VGA (default), LVDS (default), and DVI	
	Video Output	VGA: Supports up to 2560 x 1600 @ 60 Hz LVDS: 48 bit (Dual channel 24 bit) LVDS up to 1920 x 1200 @ 60 Hz DVI: Supports up to 2560 x 1600 @ 60 Hz Dual independent display: choosing two interface from VGA (Default), DVI and LVDS (Default)	
Ethernet	Interface	10/100/1000 Mbps	
	Controller	LAN1: Intel I211 LAN2: Intel I211 (G2, F)	
	Connector	RJ-45 with LED Connector x 2	
SATA	Max. Transfer Rate	300 MB/s (SATA 2.0)	
	Channel	2 (SATA2 can be configured as m-SATA)	
I/O Interface	USB 2.0	G2: one USB 3.0 (5Gbps, rear I/O), six USB 2.0 (480Mbps, pin-header x6) VG: one USB 3.0 (5Gbps, rear I/O), five USB 2.0 (480Mbps, pin-header x4, rear I/O x1) F: one USB 3.0 (5Gbps, rear I/O), six USB 2.0 (480Mbps, pin-header x6)	
	Serial	Four RS-232/422/485 for G2 & F; Two RS-232/422/485 for VG	
	Parallel	1 (EPP/ECP)	
	PS/2	1 (for mouse and keyboard, an Y cable is included in the package)	
Watchdog Timer	Output	System reset	
	Interval	Programmable, 1-255 sec/min	
Miscellaneous	Audio Output	Intel High Definition audio interface (requires a audio extension module)	
		Operating	Non-Operating
Environment	Temperature	0 ~ 60° C (32 ~ 140° F) (operating humidity: 40° C @ 85% RH Non-Condensing)	-40 ~ 85° C and 60° C @ 95% RH Non-Condensing
	Test Environment	Intel Celeron J1900 (2GHz), DDR3L 1333, 4GB SO-DIMM module*2	
Power Requirement	Voltage	12V	5V 5VSB
	Current	0.737A	0.298A 0.044A
Physical	Dimensions	185 mm (L) x 122 mm (W) (7.3" x 4.8")	

Block Diagram

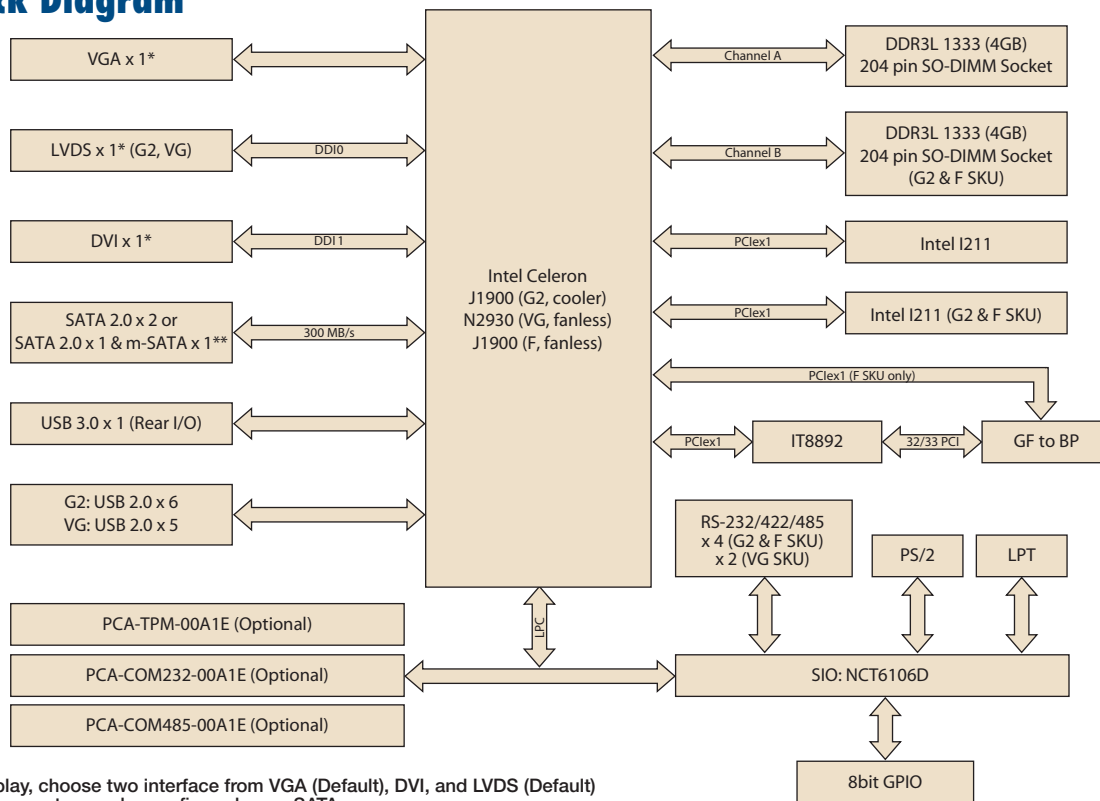

* Dual display, choose two interface from VGA (Default), DVI, and LVDS (Default)
 ** SATA2 connector can be configured as m-SATA.

Ordering Information

Model Name	SoC	Memory	DIMM Slot	Fanless	USB	COM Port	PCIe x 1	LPT	LAN	VGA	LVDS	DVI	m-SATA	HW Monitor
PCI-7032G2-00A1E	J1900	Dual channel DDR3L-1333 up to 8GB (204-pin SO-DIMM socket x2)	2	No	1 x USB 3.0 6 x USB 2.0	4	No	1	2	Yes	Yes	Yes	Yes	Yes
PCI-7032VG-00A1E	N2930	DDR3L-1333 up to 4GB (204-pin SO-DIMM socket x1)	1	Yes	1 x USB 3.0 5 x USB 2.0	2	No	1	1	Yes	Yes	Yes	Yes	No
PCI-7032F-00A1E	J1900	Dual channel DDR3L-1333 up to 8GB (204-pin SO-DIMM socket x2)	2	Yes	1 x USB 3.0 6 x USB 2.0	4	Yes	1	2	Yes	No	Yes	No	No

*PCI-7032F-00A1E is only compatible with Advantech IPC-120 chassis which has special thermal design and can NOT be used with other enclosure.

Optional Accessories

Part Number	Description
PCA-COM485-00A1E	4x RS-422/485 module
PCA-COM232-00A1E	4 x RS-232 module
PCA-TPM-00A1E	TPM module (Trusted platform management)
1700021831-01	DVI cable
1700000265	12 pin-12 pin ATX power cable kit
1703100261	2-port USB cable kit

Packing List

Part Number	Description	Quantity
1960046526N001	CPU cooler for Celeron J1900 SoC (only available for G2 SKU)	x 1
1700003194	Serial ATA HDD data cable	x 1
1700022749-11	Serial ATA HDD power cable	x 1
1700002223	Printer (parallel) port cable kit	x 1
1700008762	Dual COM ports cable kit	x2 (G2,F) x1 (VG)
1700002343	ATX feature cable	x 1
1700014398-11	4-port USB cable kit	x 1
1700060202	Y cable for PS/2 keyboard and PS/2 mouse	x 1
9689000068	Jumper pack	x 1
2001703200	PCI-7032 startup manual	x 1
2061703200	DVD with driver utility and manual (in PDF format)	x 1

Bracket View

