



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 (C) COPYRIGHT - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			DATE	DWN	APVD
J		-		変更 DESCRIPTION					
P	LTR								
	C2	REVISED PER ECR-14-013099					09DEC2014	NK	GJ

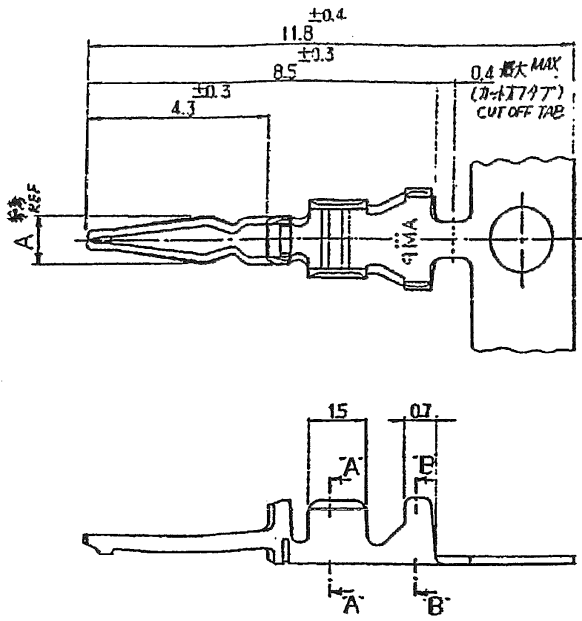

断面 A-A
SECT



断面 B-B
SECT

- NOTES:
- APPLICABLE HDR HSG :172520(2.5PITCH)
:172890(2.0PITCH)
 - PRODUCT SPEC:108-5163
 - CRIMPING SPEC:114-5062
COMMON APPLICATOR FOR 2/2.5MM PITCH
HDR HSG:P/N 755764-X
EXCLUSIVE APPLICATOR FOR 2.5MM PITCH
HDR HSG:P/N 752829-X
 - INSTRUCTION SHEET:IS-206J,207J,208J
- 5 LOOSE PIECE 172797-X SUPERSEDED
BY CONTINUOUS 172781-X.

- 注記
- 適用ハウジング型番:172520(2.5MMピッチ用)
:172890(2.0MMピッチ用)
 - 製品規格: 108-5163
2/2.5MMピッチ・ヘッダーハウジング
専用アプリケーター型番: 755764-X
 - 取付適用規格: 114-5062
2.5MMピッチ・ヘッダーハウジング
専用アプリケーター型番: 752829-X
 - 取扱説明書: IS-206J,207J,208J

1.2	1 -0.05 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-4
0.95	0.8 ±0.1 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-3
1.2	1 -0.05 DIA	1.2-1.6	5	PRE-TINNED BRASS 0.2t	172781-2
0.95	0.8 ±0.1 DIA	1.2-1.6	5	錫めっき済黄銅0.2t	172781-1
A REF	APPLICABLE PCB HOLE AND THK	LOOSE PIECE CONTACT P/N	MATERIAL	PART NO.	
参考 A寸法	適用基板穴径と板厚	バラ状端子型番	材料	型番	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SATO	120CT05	TE TE Connectivity	
DIMENSIONS: 単位: 純 mm		CHK N.YAMASAKI	120CT05		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD N.YAMASAKI	120CT05	NAME 名称	
10 ≤ ± 0.2		PRODUCT SPEC 製品規格		LOW PROFILE MINI AMP-IN CONTACT	
10 < ≤ 30 ± 0.25		APPLICATION SPEC 取付適用規格		SIZE	
30 < ≤ 100 ± 0.3		WEIGHT		CAGE CODE	
ANGLES ± 5°		FINISH 仕上		DRAWING NO 番号	
MATERIAL 材料		SEE TABLE		A3 00779	
		CUSTOMER DRAWING		172781	
		SCALE 尺度		SHEET 1 OF 1	
				REV C2	