



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



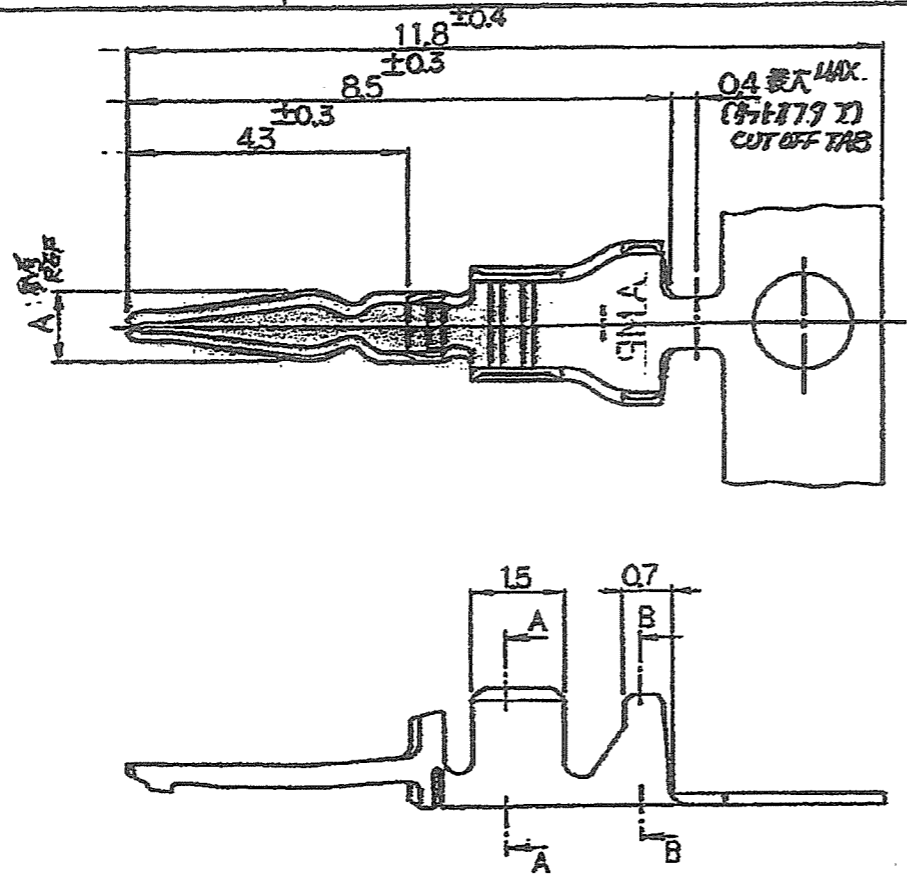

断面 A-A SECT

断面 B-B SECT

0.95	0.8 ±0.1 DIA, 1.2~1.6	—	POST-TINNED PHOS-BRO. 0.2t 錫青銅 錫めっき仕上げ 0.2t	172782-9
0.95	0.8 ±0.1 DIA, 1.2~1.6	—	POST TINNED, HIGH HEAT RESISTANCE COPPER ALLOY 高耐熱性銅合金 錫めっき仕上げ 0.2t	1-172782-2
1.2	1 ±0.05 DIA, 1.2~1.6	++	POST-TINNED BRASS 0.2t 黄銅 錫めっき仕上げ 0.2t	172782-7
0.95	0.8 DIA, 1.2~1.6	—	POST-TINNED BRASS 0.2t 黄銅 錫めっき仕上げ 0.2t	172782-5
1.2	1 ±0.05 DIA, 1.2~1.6	172798-2	PRE-TURNED BRASS 0.2t 黄銅 0.2t	172782-2
0.95	0.8 DIA, 1.2~1.6	172798-1	黄銅 0.2t	172782-1
A REF	APPLICABLE PCB HOLE AND TAB	LOOSE PIECE CONTACT %	MATERIAL	PART NO
	PCB孔とタブ	部品別接触率	材料	型番

NOTES

1. APPLICABLE HDR HSG: 172520 (25 PITCH) 172890 (20 PITCH)
2. PRODUCT SPEC: 108-5163
3. CRIMPING SPEC: 114-5062
COMMON APPLICATOR FOR 2/25mm PITCH HDR HSG = P/M 755765-□
EXCLUSIVE APPLICATOR FOR 25mm PITCH HDR HSG = P/M 752830-□
4. INSTRUCTION SHEET: IS-206J, 207J, 208J

注:

1. 適用ヘッド型番 = 172520 (25mmピッチ) 172890 (20mmピッチ)
2. 製品規格 = 108-5163
3. 取付適用規格 = 114-5062
2/25mmピッチヘッド-ヘッド専用アタッチメント型番 = 755765-□
25mmピッチヘッド-ヘッド専用アタッチメント型番 = 752830-□
4. 取扱説明書 = IS-206J, 207J, 208J

寸法: 単位 DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE

G1	REVISED PER ECO-11-005030	RK	HMR	EMART
LTR	SEE REVISION RECORD	DR	CHK	DATE

TE Connectivity		A	
WIRE RANGE	INSULATION DIA	低プロファイルミニアンペアコンタクト (LOW PROFILE MINI AMP-IN CONTACT)	
0.2-0.75	1.4-1.5		
MATERIAL	FINISH	SIZE	LOC
黄銅 (SEE TABLE)	—	A3 J	C-172782
DR	DATE	REV	SHEET
LORNI	1/25/05	G1	—
CHK	DATE	REV	SHEET
—	—	10-1	—

(CUSTOMER DRAWING) 参考図面