



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Isolation - Step Down (230VAC to 115VAC) 172 Series Plug-In




Features

- Primary 230VAC, 50/60 Hz. Secondary 115VAC
- Circuit breaker in primary.
- Provides circuit isolation & steps down primary voltage.
- Hi-pot tested to 2 KV RMS.
- Electrostatic shield between primary & secondary.
- Input (primary) connected to a 5 foot long cord & European (Schuko) grounded plug - NOTE: old inventory only.
- Input - due to U.L changes in 2007 - NEW production with the European (Shuko) parts would no longer be U.L. listed. Therefore, we have replaced this input plug with a standard North American 3-wire, 250V plug (NEMA 6-15P).
- Output (secondary) connected to a 1 foot long cord & standard North American 3-wire grounded receptacle (NEMA 5-15R).
- North American Mark of Safety - C UL & UL listed (File #E211544).
- Indoor use only.
- **Remember** - These units do NOT convert line frequency

Accessories

- International Grounded Adaptor Plugs

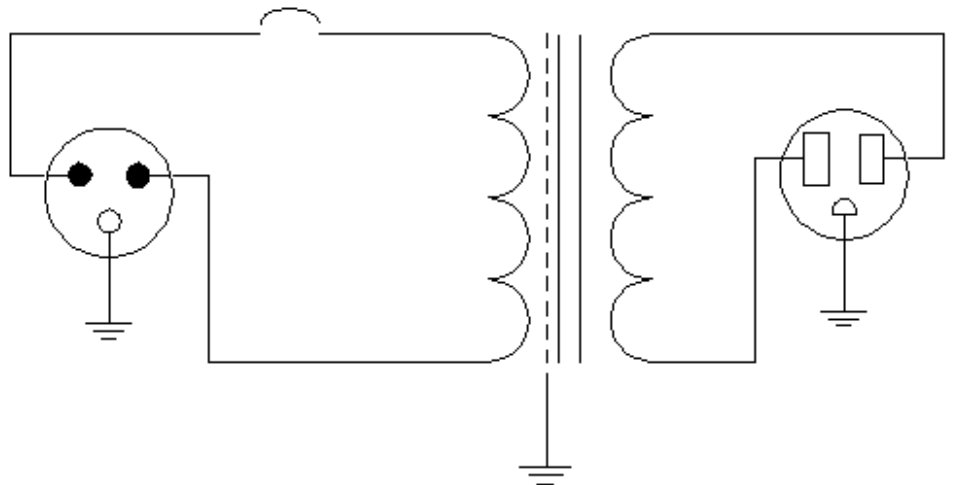

Part No.	Capacity Leakage		Full Load Total		Surge / Noise	Capacitance				
	VA	Current	Efficiency	Harmonic Distortion		Between Windings at 1KHz	Overall Dimer			
					Suppression	A	B	C		
172A	100	40.48 μ A	88%	0.19%	-35 dB	40 pF	3.80	5.06	4.68	3
172B	200	41.97 μ A	91%	0.18%	-34.32 dB	20 pF	3.80	5.56	4.68	3
172D	500	68.22 μ A	96%	0.23%	-37.69 dB	28 pF	3.80	7.06	4.68	3
172E	750	79.58 μ A	94%	0.19%	-38.24 dB	20 pF	4.40	8.70	5.39	3
172F	1000	94.08 μ A	96%	0.18%	-32.74 dB	40 pF	5.28	7.75	6.38	4

Data subject to change without notice