



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J			D	REVISED PER ECR-11-007143	07JUL2011

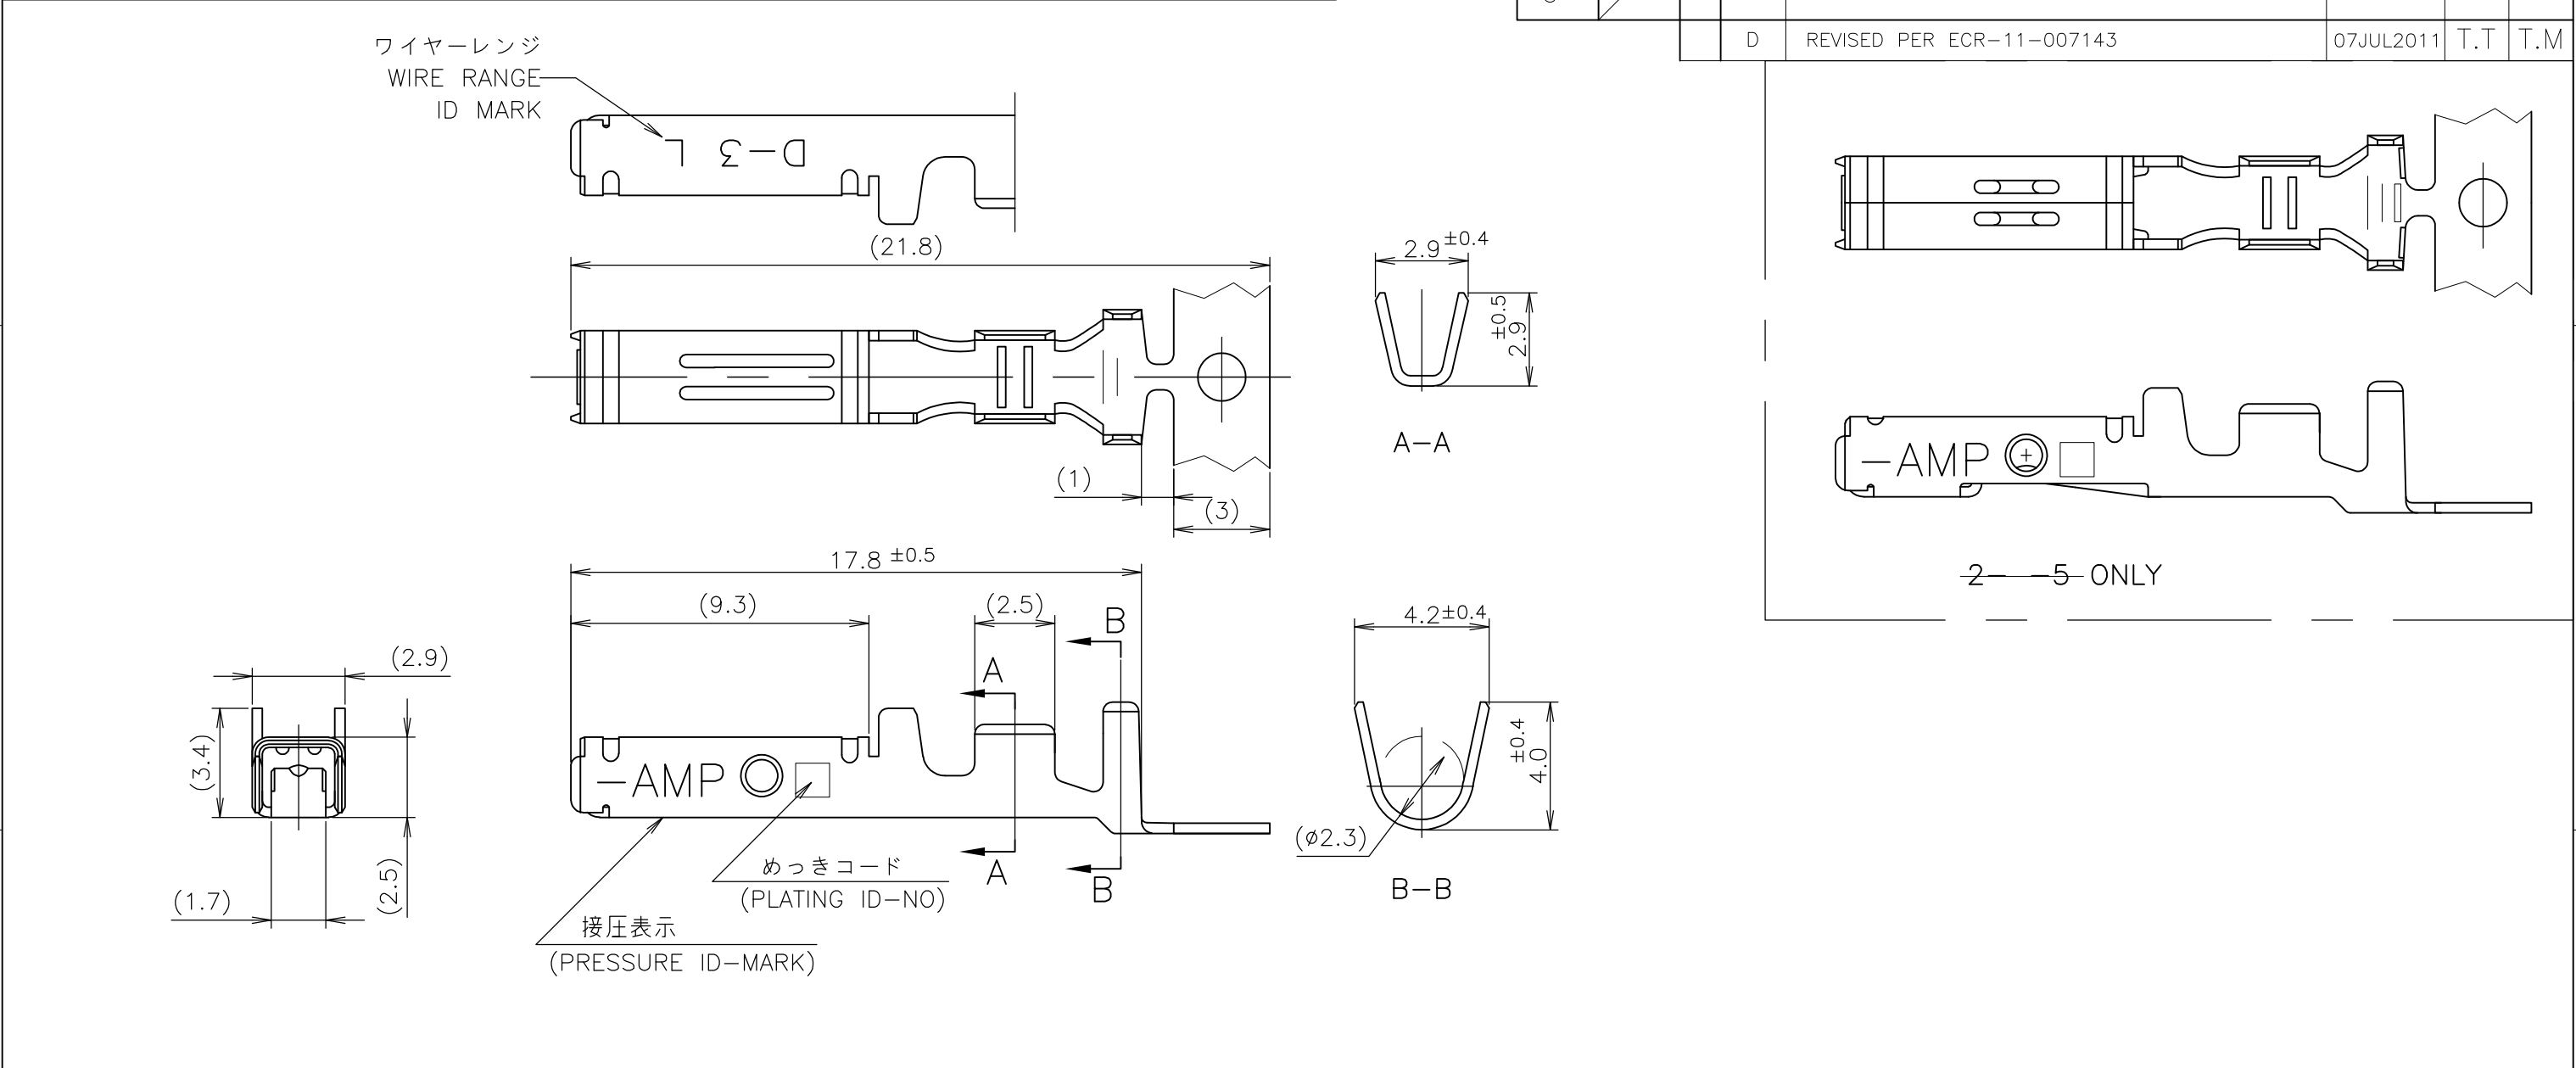

- ① 標準接圧型コンタクト：一般向け及び多極用
- ② 高接圧型コンタクト：高電流用及び強振動用
- ③ 金めっきは接続部のみとする
- 4 製品規格：108-5349
- 5 取付け適用規格：114-5148

OBSOLETE	②	H	5	光沢錫めっき (BRIGHT TIN-PL.)	2-175196-5
			5	光沢錫めっき (BRIGHT TIN-PL.)	1-175196-5
			3	0.76μm 最小金めっき (0.76μm MIN. Au-PL.)	1-175196-3
			2	0.38μm 最小金めっき (0.38μm MIN. Au-PL.)	1-175196-2
①	OBSOLETE		5	光沢錫めっき (BRIGHT TIN-PL.)	175196-5
			3	0.76μm 最小金めっき (0.76μm MIN. Au-PL.)	175196-3
			2	0.38μm 最小金めっき (0.38μm MIN. Au-PL.)	175196-2
備考 (REMARK)	接圧表示 (ID-MARK)	めっきコード (PL. ID NO)	仕上 (FINISH)		型番 (P/N)
接点タイプ	(CONT. TYPE)				

- ① CONTACT TYPE; LOW PRESSURE TYPE (FOR GENERAL)
- ② CONTACT TYPE; HIGH PRESSURE TYPE (FOR HIGH CURRENT OR ANTI-VIBRATION)
- ③ GOLD-PL. CONTACT AREA ONLY
- 4 PRODUCT SPEC: 108-5349
- 5 APPLICATION SPEC: 114-5148

GENERAL TOLERANCE 一般公差
10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL
材料
(COPPER ALLOY)
銅合金

FINISH
仕上
(SEE TABLE)
表参照

DWN
T-YONEBAYASHI
27JUN1990

CHK
H.OBATA
14FEB1991

APVD
S.MANABE
14FEB1991

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

TE Connectivity

L SIZE
DYNAMIC SERIES REC. CONTACT
ダイナミックシリーズリセプタクルコンタクト

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-175196

RESTRICTED TO

SCALE
尺度
5:1

SHEET
1 OF 1

REV
D