



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
N9	REVISED	ECR-16-003280	06SEP2016	KF	HY

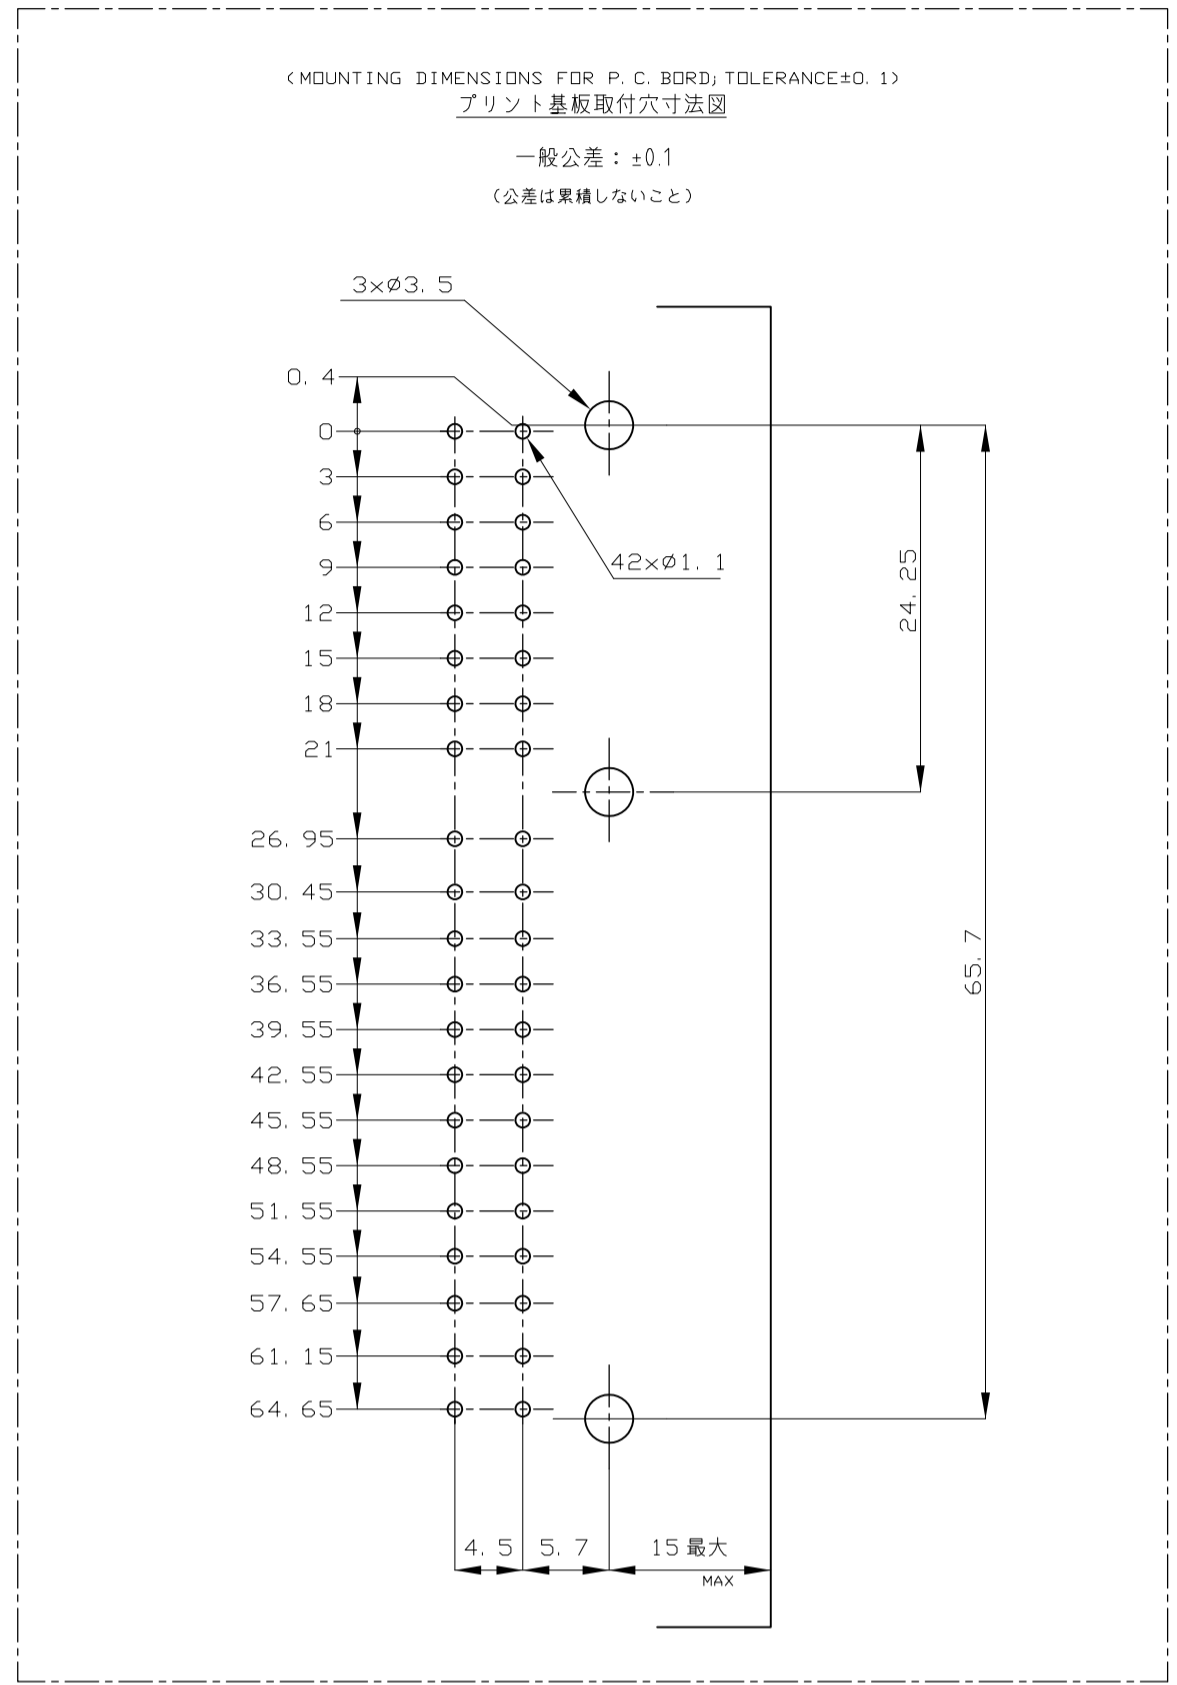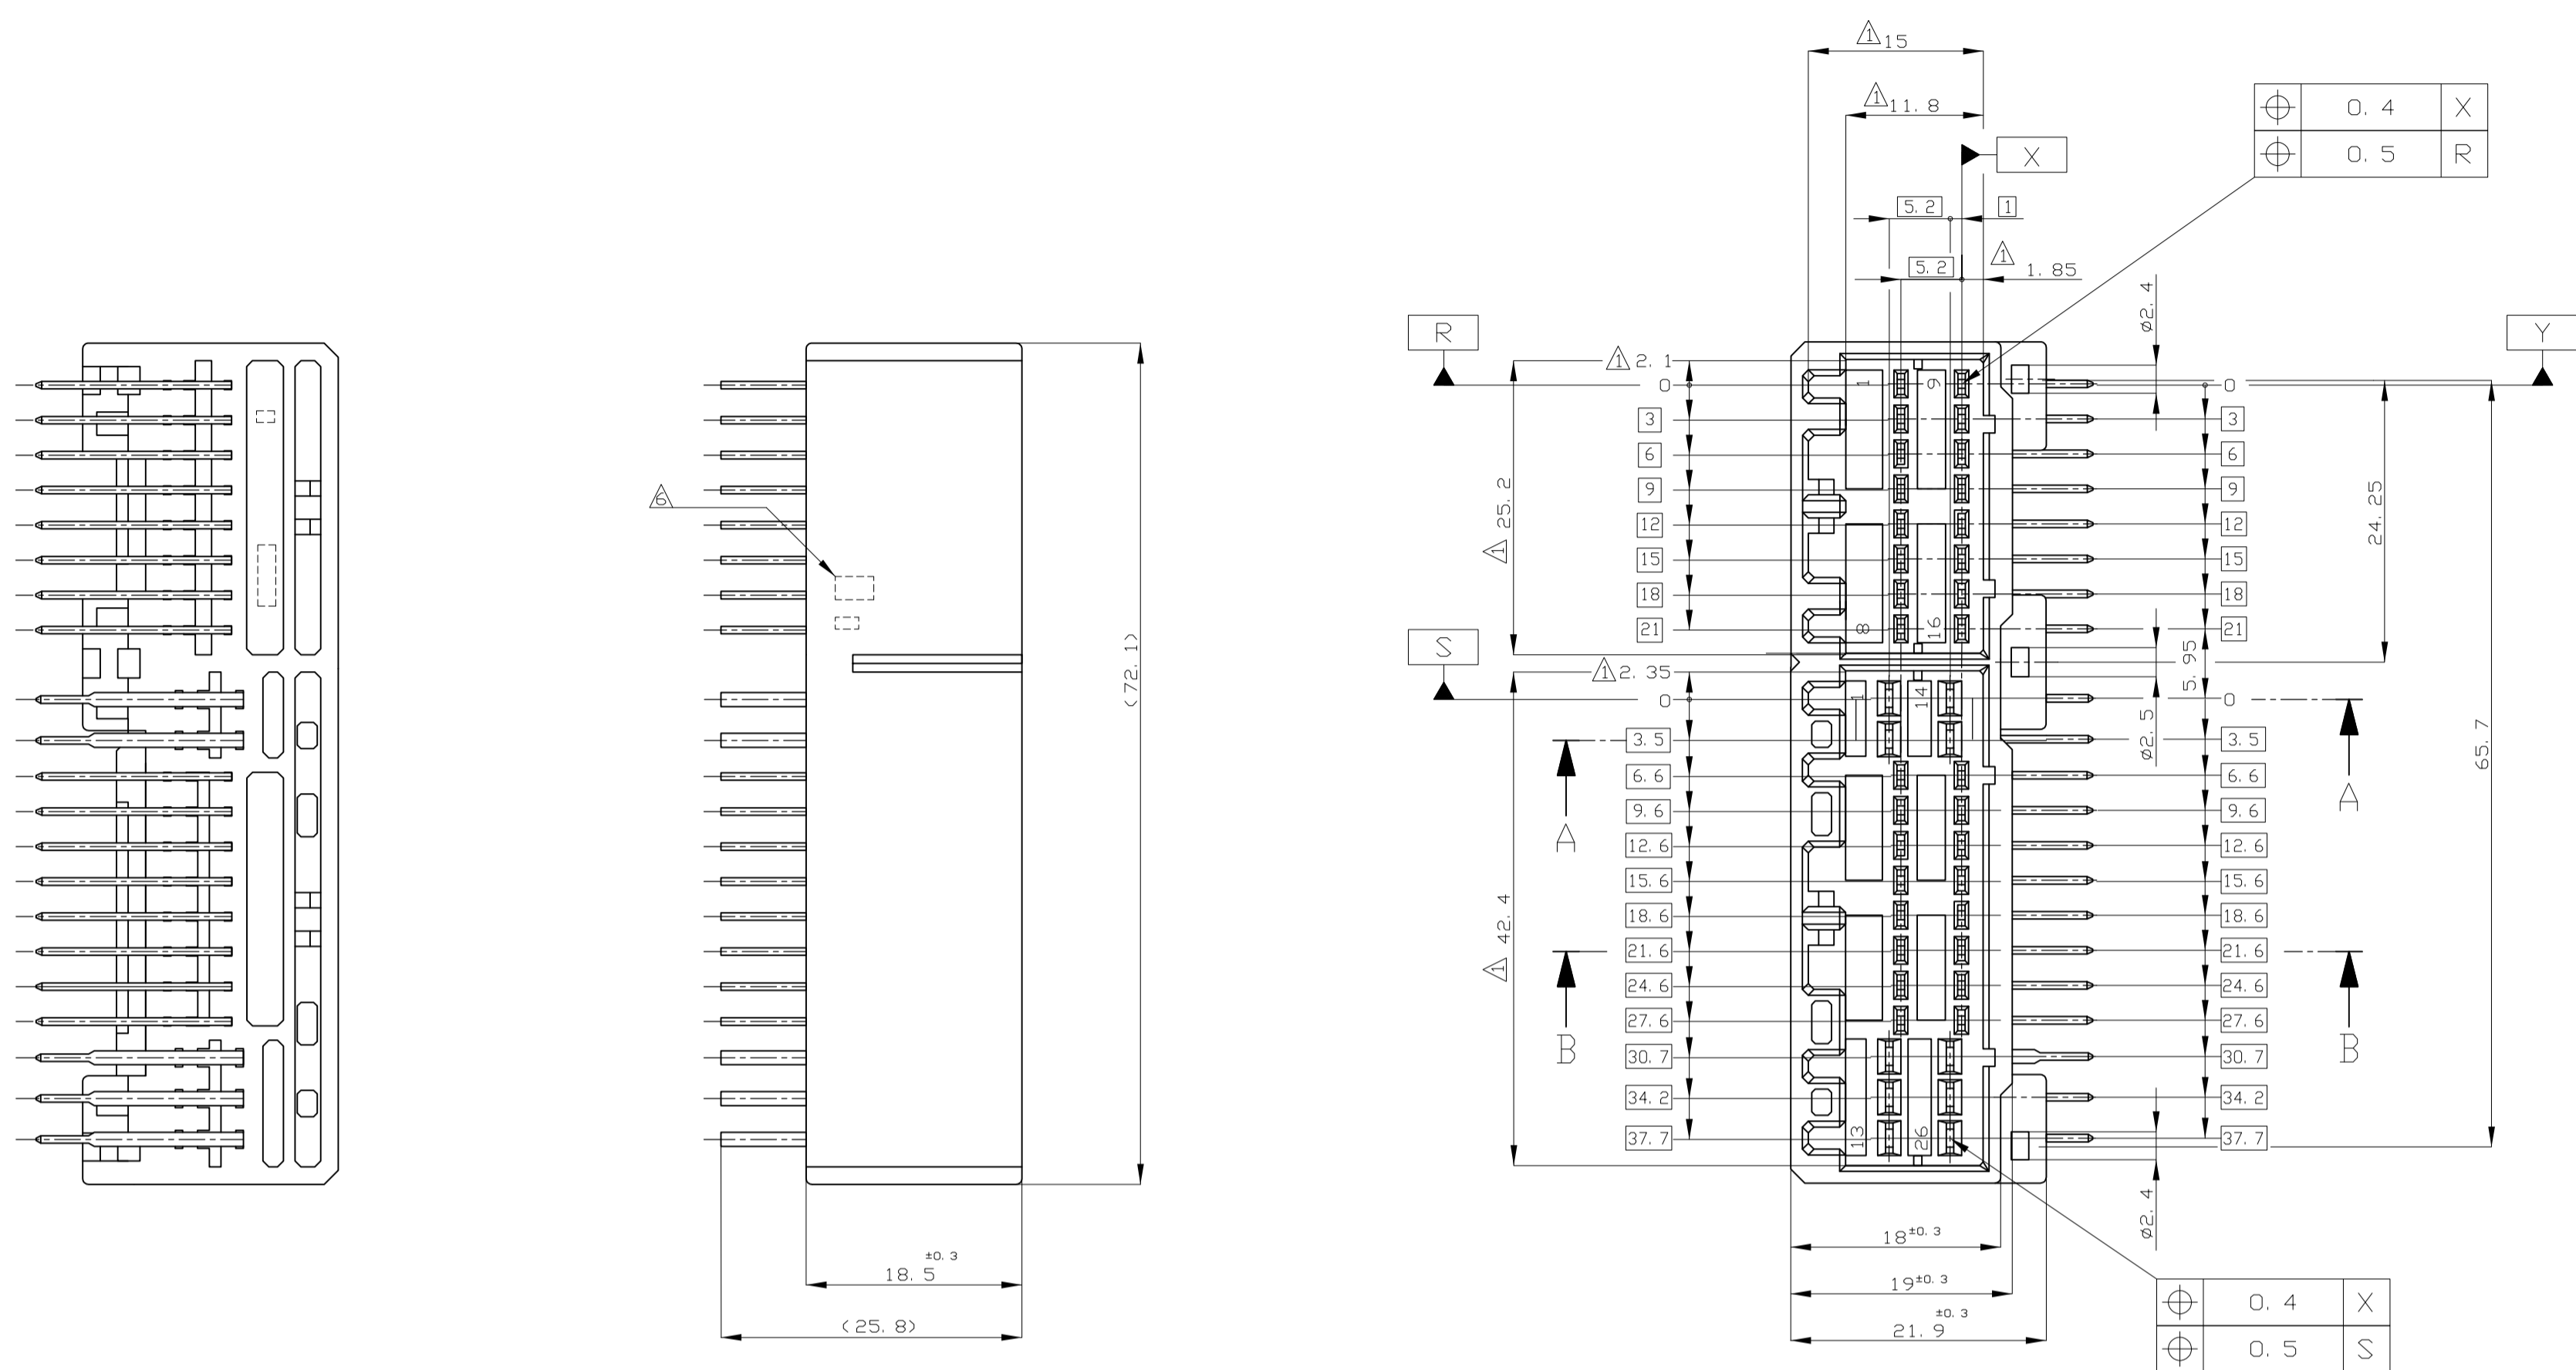

- △ [Z]面から2mmの範囲で測定
- 2 嵌合相手ハジギング型 174514, 174516, 917981, 917992
- 3 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種 呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
- 4 適用製品規格番号: 108-5280, 5342

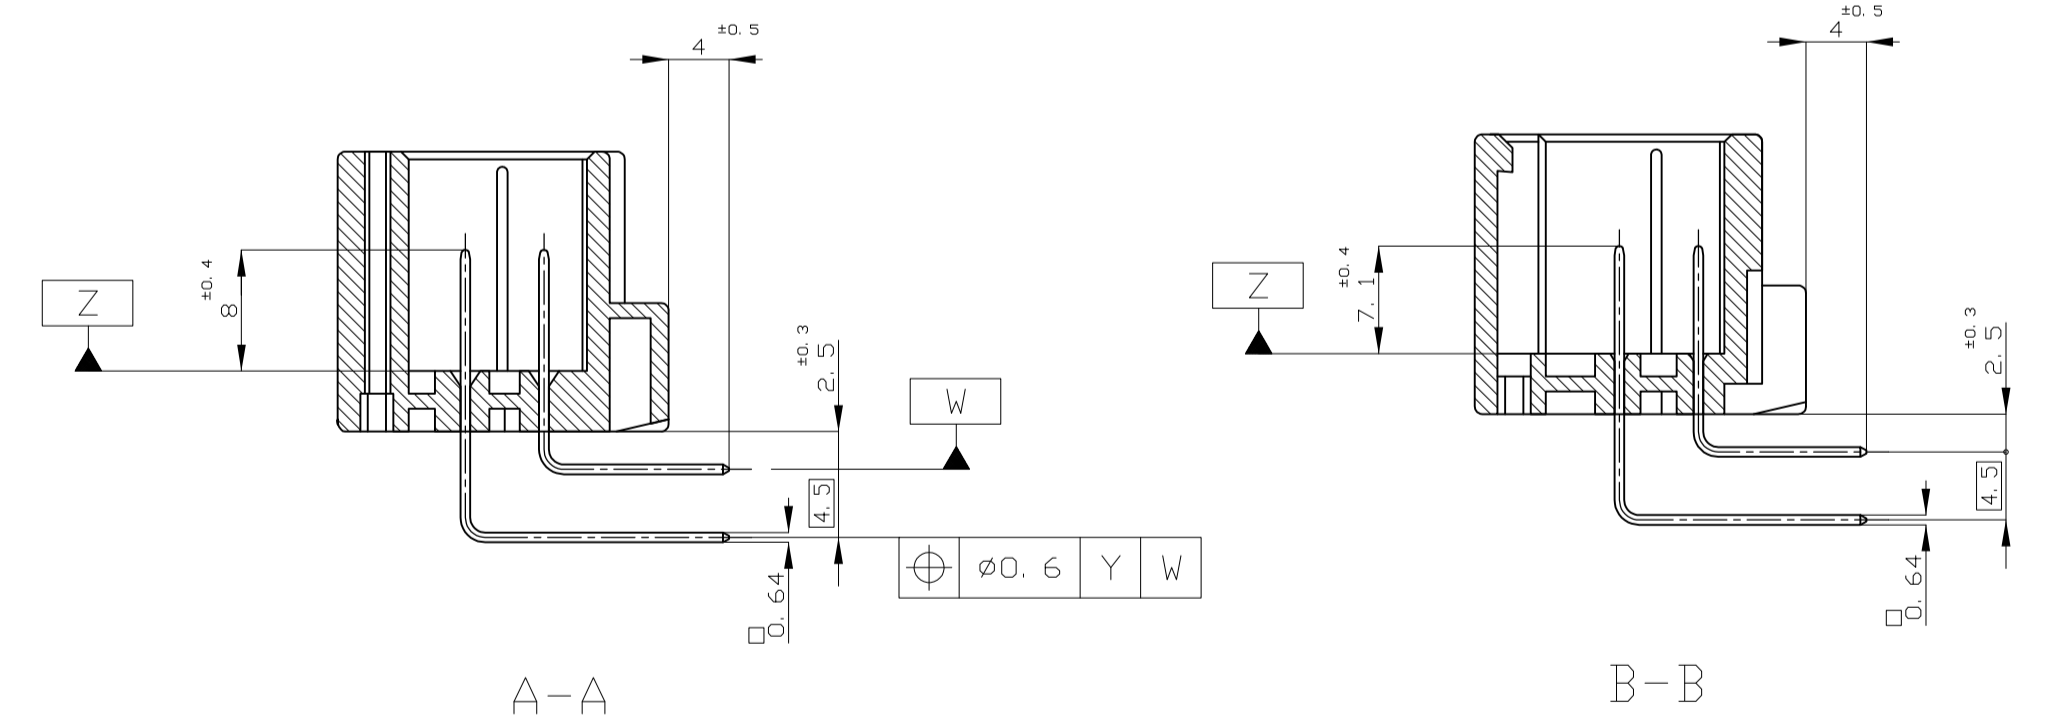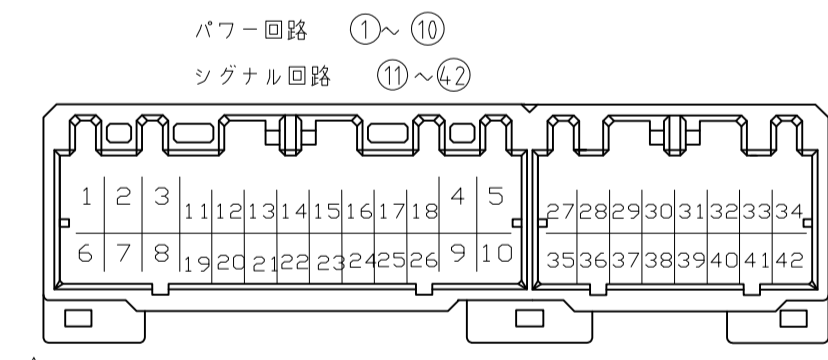

- △ MUST BE KEPT BETWEEN [Z] AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH (MAX.)
- 4 PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
- 5 <TIGHTENING TORQUE> 0.4N-m (4kg-cm) MAX.
- 6 APPLICABLE PRODUCT SPEC NO; 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIRCUIT NO. (1)~(10)
- SIGNAL CIRCUIT NO. (11)~(42)
- △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

NO.	FINISH	PLATING	THICKNESS	MARKING	CONTACT SIDE	POWER CIRCUIT NO.	SIGNAL CIRCUIT NO.	HOUSING COLOR	PART NO.
54	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 11	10	(29)-(32) (37)-(40) (42)	GRAY 灰色	4-5175446-6			
59	PRE-TINNED × 31	SELECTIVE GOLD × 2	13	(13) (23)	GRAY 灰色	9-5175446-6			
58	PRE-TINNED × 40	SELECTIVE GOLD × 16	11	(26)	GRAY 灰色	8-5175446-6			
58	PRE-TINNED × 26	SELECTIVE GOLD × 16	11	(26)	NATURAL 自然色	8-5175446-1			
56	PRE-TINNED × 26	SELECTIVE GOLD × 17	9	(27)-(42)	NATURAL 自然色	6-5175446-1			
54	PRE-TINNED × 25	SELECTIVE GOLD × 8	19	(19)-(26)	NATURAL 自然色	4-5175446-6			
53	PRE-TINNED × 34	SELECTIVE GOLD × 6	11	(26)	NATURAL 自然色	3-5175446-6			
53	PRE-TINNED × 36	SELECTIVE GOLD × 8	13	(13) (18) (26) (27) (34) (35) (42)	NATURAL 自然色	3-5175446-1			
52	PRE-TINNED × 10	SELECTIVE GOLD × 32	11	(42)	GRAY 灰色	2-5175446-6			
52	PRE-TINNED × 10	SELECTIVE GOLD × 32	11	(42)	NATURAL 自然色	2-5175446-1			
55	PRE-TINNED × 10	SELECTIVE GOLD × 12	11	(42)	NATURAL 自然色	5-5175446-1			
9	TIN-LEAD	SELECTIVE GOLD × 30	13	(13) (23)	GRAY 灰色	9-175446-6			
8	TIN-LEAD	SELECTIVE GOLD × 2	13	(23)	GRAY 灰色	9-175446-6			
8	TIN-LEAD	SELECTIVE GOLD × 16	11	(26)	GRAY 灰色	8-175446-6			
8	TIN-LEAD	SELECTIVE GOLD × 16	11	(26)	BLACK 黒色	8-175446-2			
8	TIN-LEAD	SELECTIVE GOLD × 16	11	(26)	NATURAL 自然色	8-175446-1			
7	TIN-LEAD	SELECTIVE GOLD × 3	14	(14) (15) (25)	GRAY 灰色	7-175446-5			
7	TIN-LEAD	SELECTIVE GOLD × 3	14	(15) (25)	GRAY 灰色	7-175446-5			
6	TIN-LEAD	SELECTIVE GOLD × 17	9	(27)-(42)	NATURAL 自然色	6-175446-1			
5	TIN-LEAD	SELECTIVE GOLD × 12	11	(42)	NATURAL 自然色	5-175446-1			
5	TIN-LEAD	SELECTIVE GOLD × 11	10	(29)-(32) (37)-(40) (42)	GRAY 灰色	4-175446-6			
4	TIN-LEAD	SELECTIVE GOLD × 8	19	(19)-(26)	NATURAL 自然色	4-175446-1			
4	TIN-LEAD	SELECTIVE GOLD × 8	19	(26)	NATURAL 自然色	4-175446-6			
3	TIN-LEAD	SELECTIVE GOLD × 6	11	(26)	GRAY 灰色	3-175446-6			
3	TIN-LEAD	SELECTIVE GOLD × 8	13	(13) (18) (26) (27) (34) (35) (42)	NATURAL 自然色	3-175446-1			
2	TIN-LEAD	SELECTIVE GOLD × 32	11	(42)	GRAY 灰色	2-175446-6			
0	PRE-TINNED	10	11	(42)	GRAY 灰色	175446-6			
1	PRE-TINNED	42	11	(42)	NATURAL 自然色	175446-2			
0	PRE-TINNED	42	11	(42)	NATURAL 自然色	175446-1			

GENERAL TOLERANCE
0<X<10 ±0.2
10<X<30 ±0.25
30<X<100 ±0.3
ANGLES ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED. MATERIAL: HOUSING: PBT CONTACT: BRASS. FINISH: 仕上. WEIGHT: 21.3 g. CUSTOMER DRAWING. SCALE: 2:1. SHEET: 1 of 1. REV: N9.

STE TE Connectivity. 42POSITION CAP HOUSING ASSY 040/070 SERIES HYBRID I/O CONNECTOR. APVD: M. KADOSAKI, T. SHINOHARA, K. BETSUJI. DATE: 17MAY05. NAME: 製品仕様. SEE NOTE 4. APPLICATION SPEC: 取付適用規格. SIZE: A1. CASE CODE: 00779. DRAWING NO: 175446. RESTRICTED TO: -.