



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



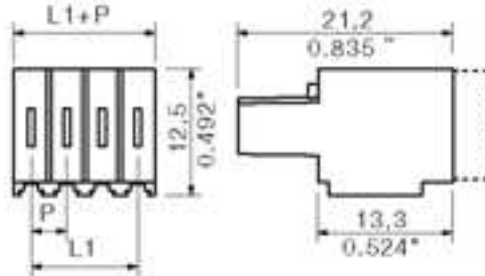

General ordering data

Order No.	1770710000
Part designation	BLIDCB 3.5/6 SN SW
Version	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 90°/270°, Box
EAN	4032248174492
Qty.	10 pc(s).

System parameters

Conductor connection system	IDC terminal
Outgoing direction of conductor	90°/270°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	6
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264-A
L1 in mm	17.5 mm
L1 in inch	0.689 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

Material data

Insulating material	PBT
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned

Connectable conductors

Clamping range, min.	0.32 mm ²
Clamping range, max.	0.5 mm ²
AWG, min.	22
AWG, max.	20
Outer diameter of insulation, max.	2.1 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	0.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	0.5 mm ²

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	6 A
Rated current, max. No. pins (Tu=20°C)	6 A
Rated current, min. No. pins (Tu=40°C)	6 A
Rated current, max. No. pins (Tu=40°C)	5 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 60 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	7 A
AWG conductor (field wiring), min.	22
AWG conductor (field wiring), max.	20

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	7 A
AWG conductor, min.	22
AWG conductor, max.	20

Approvals

Approvals institutes



Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1751380000	BLIDCB 3.5/2 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 90°/270°, Box
1770670000	BLIDCB 3.5/2 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 90°/270°, Box
1751390000	BLIDCB 3.5/3 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 90°/270°, Box
1770680000	BLIDCB 3.5/3 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 90°/270°, Box
1751400000	BLIDCB 3.5/4 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 90°/270°, Box
1770690000	BLIDCB 3.5/4 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 90°/270°, Box
1751410000	BLIDCB 3.5/5 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 90°/270°, Box
1770700000	BLIDCB 3.5/5 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 90°/270°, Box
1751420000	BLIDCB 3.5/6 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 90°/270°, Box
1751430000	BLIDCB 3.5/7 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 90°/270°, Box
1770720000	BLIDCB 3.5/7 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 90°/270°, Box

1751440000	BLIDCB 3.5/8 SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 90°/270°, Box
1770730000	BLIDCB 3.5/8 SN SW	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 90°/270°, Box