



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-B 16-AMLD

Order No.: 1771613



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771613>

HEAVYCON panel mounting base B16, with single locking latch,
height 27 mm, with cover

Commercial data

EAN	4017918036331
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.1571 KG
Catalog page information	Page 489 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
02/14/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	27 mm
Width	43 mm
Length	114 mm

Housing type	Panel mounting base with cover
Locking type	With single locking latch
Protective cover	Yes
Degree of protection	IP65 protection when the connector is inserted
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Locking latch material	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF
Material, protective cover	PA
Length of the assembly cutout	86 mm
Width of the assembly cutout	35 mm

Certificates / Approvals




Certification


GOST

Diagrams/Drawings

Dimensioned drawing

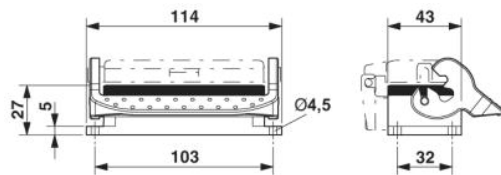

Dimensional drawing

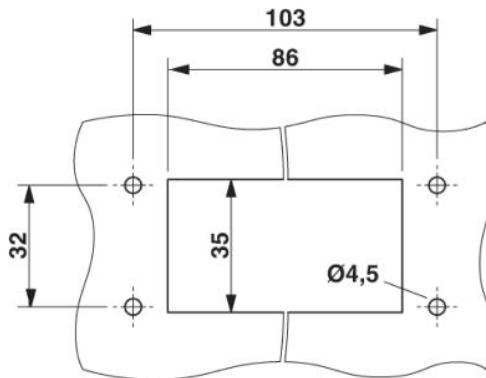

Panel cutout

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;