



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-B 24-TMQ/PG29S

Order No.: 1771833



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771833>

Sleeve housing, with double locking latch, height 76 mm, with screw connection, 1x Pg29, lateral cable entry

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918036539 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.45199 KG |
| Catalog page information | Page 500 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|---|
| Note | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24 |
| Height | 76 mm |
| Width | 43 mm |
| Length | 120 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Sleeve housings |
| Locking type | With double locking latch |
| Type of the screw connection | 1x Pg29 |
| Pg screw connection | With |
| Wrench size, union nut | 37 mm |
| Cable exit | Lateral |
| External cable diameter | 18 mm ... 27 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |
| Locking latch material | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

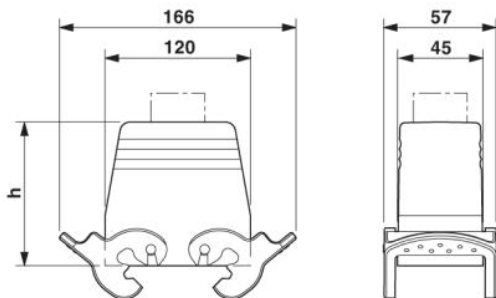

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;